

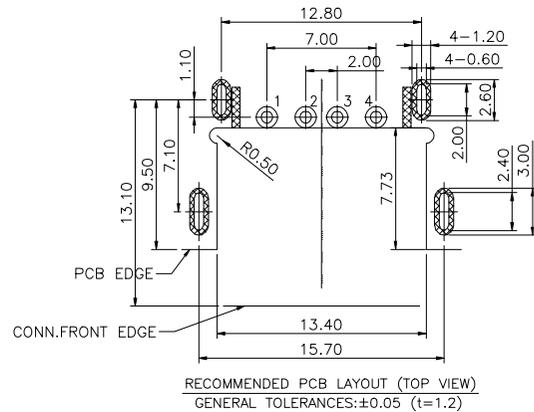
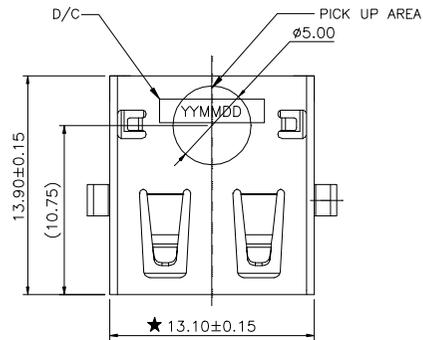


环保物料 HF

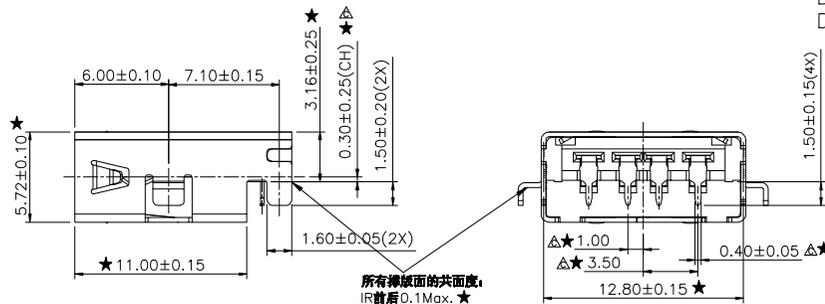




RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ± 0.05 (t=1.2)

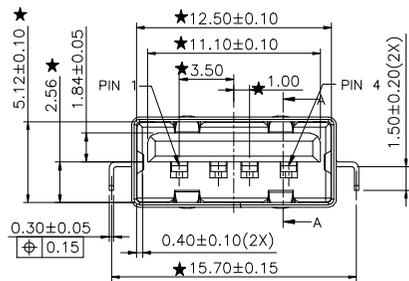

所有接触面的共面度:
IR前磨0.1Max. ★

W-USB2-CH030-HXX

Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

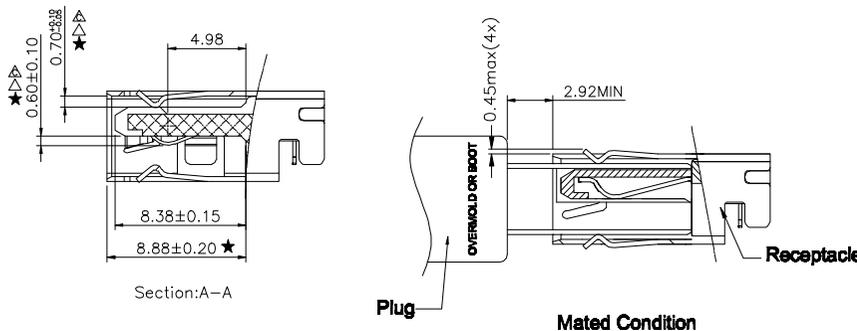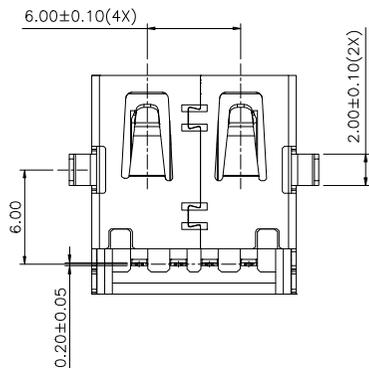

Plug Mated Condition

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
Shell	Shield

CONNECTOR BOM:

ITEM	PART NAME	QTY	MATERIA	FINISH/PLATING
3	HOUSING	1	LCP	BLACK,UL94 V-0
2	SHELL	1	SUS201-H,T=0.30	NI 50u"MIN PLATED OVER ALL
1	4P CONTACT	4	C5191-H,T=0.20	CONTACT AREA 1u"MIN,SOLDER AREA PLATING 80u"MIN MATTE TIN,UNDER PLATING 50u"MIN NICKEL

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
A1	更新图框发行	20.01.05	LINEAR	1:1			W-USB2-CH030-HXX	ENDE05
A2	按客户要求更新插拔力标准及外壳弹片尺寸管控	21.09.27	0.0±0.30	APPROVED				
A3	更新PCB LAYOUT	21.11.30	X'REF±6'	DESIGNER				
A4	按客户标准更新图纸	23.09.06	X'±3'	DRAWN	Mlicky Ma	23.09.06	TITLE	
			0.00±0.20				USB2.0 AF R/A DIP TYPE	
			0.000±0.10				C/H=0.30mm	REV A4 SHEET 1/1

JCTC®

环保物料


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.



PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-USB2-CH030-HXX	4500 (PCS)	450 (PCS)	10

1. QUANTITY: 450 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

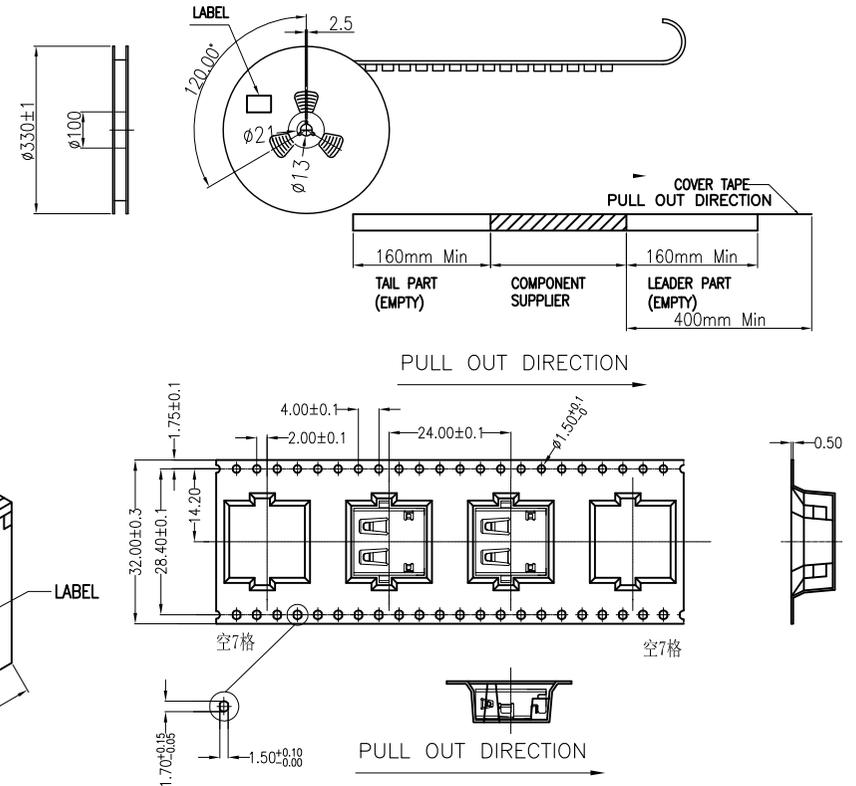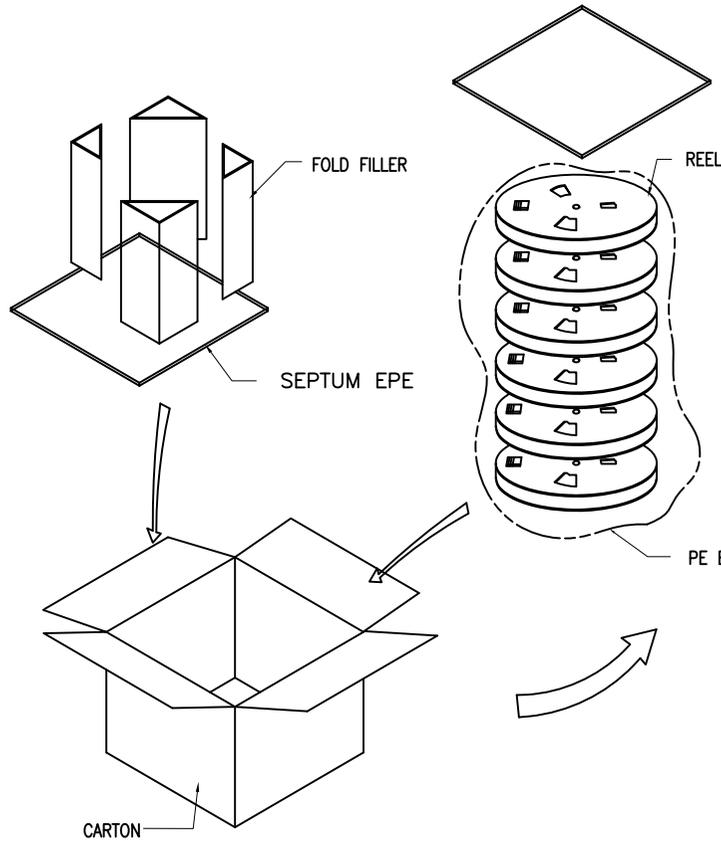

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS
A0	新图面发行	19.11.15		LINEAR	ANGLES	1:1					
A1	更新包装发行	20.10.13	UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER	Daniel Dong	21.11.30	TITLE	USB2.0 AF R/A DIP TYPE C/H=0.30mm	
A2	更新图框发行	21.11.30		0.00±0.25	X° ±3°						
				SIZE: A4	0.000±0.10						X° X' ±2°