

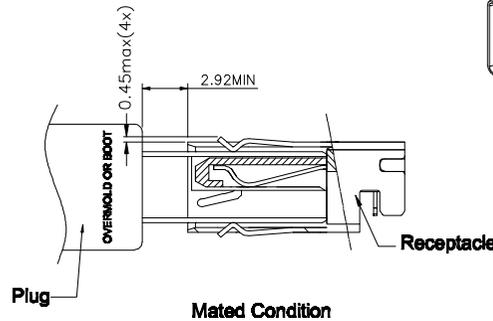

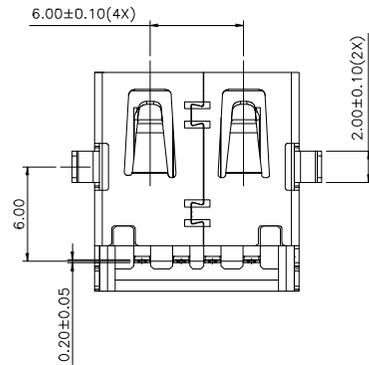
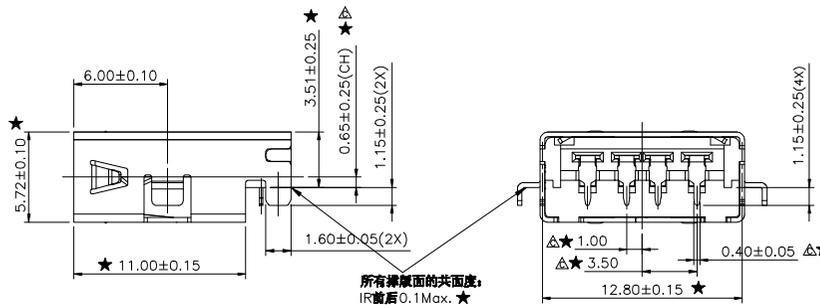
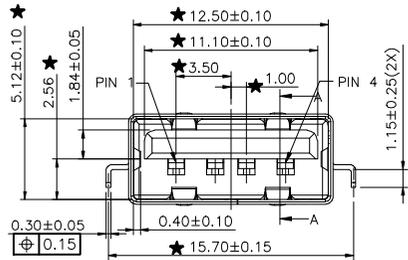
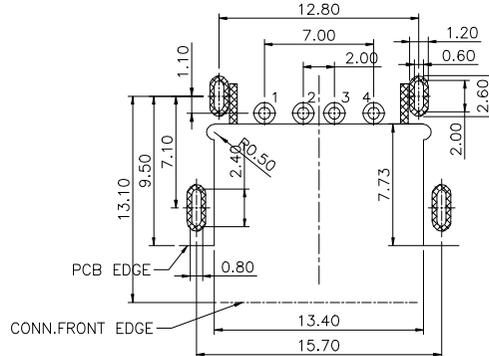


环保物料 HF

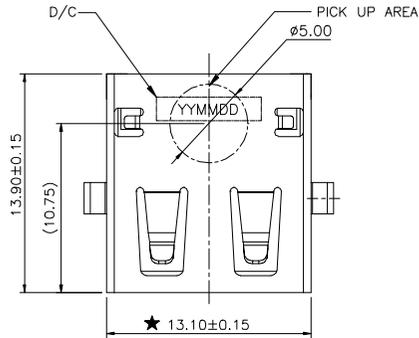

- NOTES:
- MECHANICAL CHARACTERISTIC
 - Mating Force: 25N(2.55Kgf) max.
Unmating Force: 10N(1.02Kgf)~25N(2.55Kgf).
Durability: 1500 Cycles.
 - Contact retention: 5N/pin min after IR
 - ELECTRICAL CHARACTERISTIC
 - Rating Voltage: 30V AC.
 - Current Rating: 1.8A (For VBUS And GND Pin)
Other Contacts 0.25A
 - Contact Resistance: 30m Ohm Max, after 10m Ohm
 - Insulation Resistance: 1000M Ohm Min
 - Dielectric Withstanding Voltage: 500V AC Min
 - TEMPERATURE
 - Operating Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - Salt Spray: 48Hours.
 - Burr: 0.05mm Max.
 - Tape and reel packing satisfy EIA-364-481-D standard.
 - Dimension marked Δ should 100% CCD inspecte
Dimension marked \star should CPK > 1.33
Dimension marked \star should SIP inspecte by QC and IQC
 - ORDER INFORMATION:
W-USB2-CH065-SX1

Contact Area plating on contacts
1: G/F 2: Au 3u"
3: Au 5u" 4: Au 10u"
5: Au 15u" 6: Au 30u"

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
Shell	Shield

CONNECTOR BOM:

ITEM	PART NAME	QTY	MATERIA	FINISH/PLATING
3	HOUSING	1	LCP	BLACK,UL94 V-0
2	SHELL	1	SUS201-H,T=0.30	NI 50u"MIN PLATED OVER ALL
1	4P CONTACT	4	C5191-H,T=0.20	CONTACT AREA 1u"MIN,SOLDER AREA PLATING 80u"MIN MATTE TIN,UNDER PLATING 50u"MIN NICKEL

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.					
A0	新图面发行	20.05.26		LINEAR	ANGLES	1:1									
A1	按客户要求更新公差发行	20.11.07		0.0±0.30	X'REF±6'	APPROVED			W-USB2-CH065-SX1	ENDE05					
A2	更新图框发行	21.07.06	UNIT: MM	0.00±0.20	X'±3'	DESIGNER			TITLE						
A3	按客户标准更新图纸	23.09.06	SIZE: A4	0.000±0.10	X'X'±2'	DRAWN	Mlicky Ma	23.09.06	USB2.0 AF R/A DIP TYPE C/H=0.65mm			REV	A3	SHEET	1/1

环保物料


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.



PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-USB2-CH065-SX1	4500 (PCS)	450 (PCS)	10

1. QUANTITY: 450 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

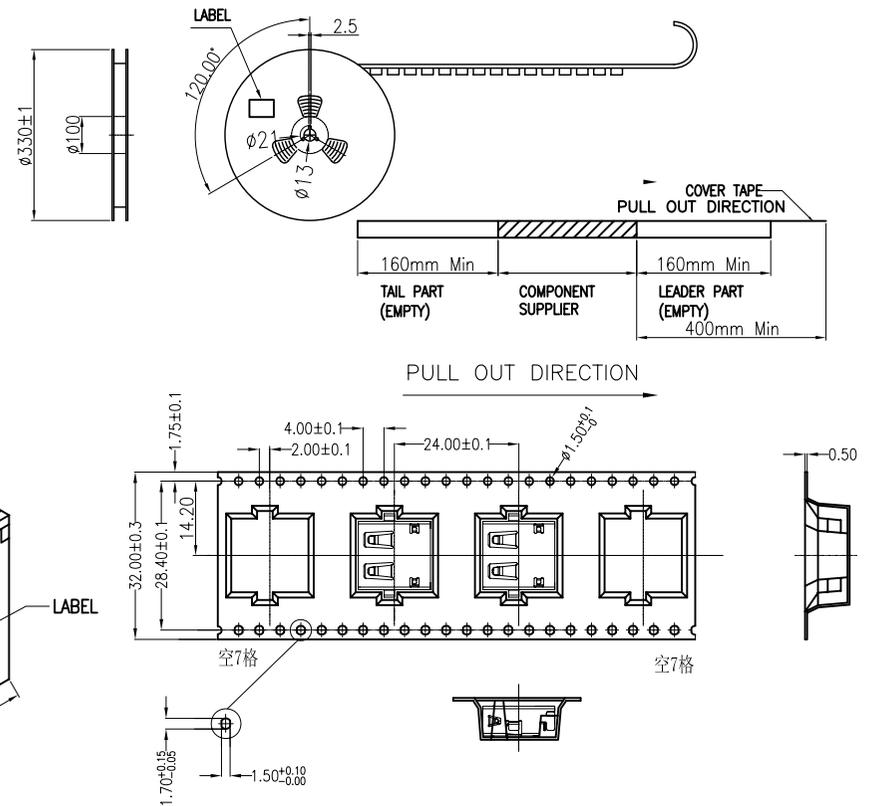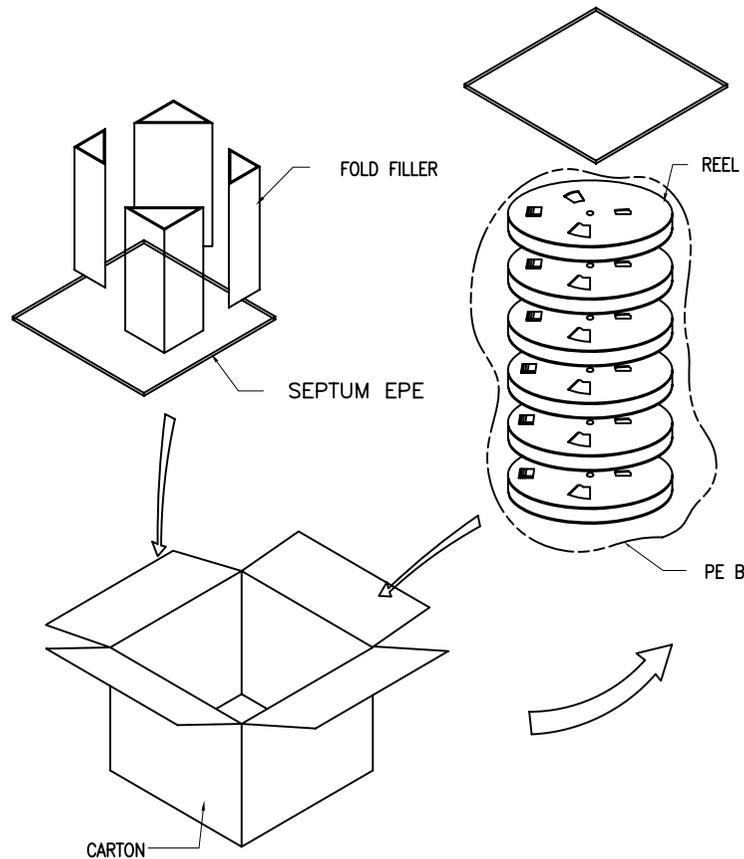

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS			
					X.X	± 0.30	X'	$\pm 2'$	W-USB2-CH065-SX1		ENDPT01					
					X.XX	± 0.20	X.X'	$\pm 1'$	审核		审核					
					X.XXX	± 0.10	▲ MAJOR DIM.		品名 TITLE		USB2.0 AF R/A DIP TYPE		比例 SCALE			
版次 REV.					日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	C/H=0.65mm		1/1		SHEET		版次 REV.	
A					B			C		D		E		F		