

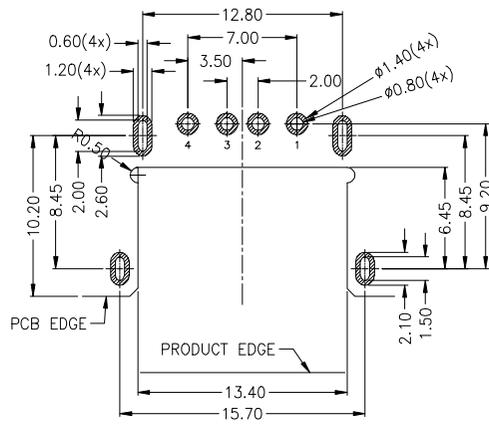
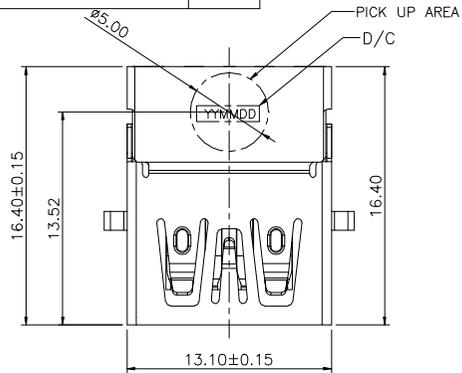
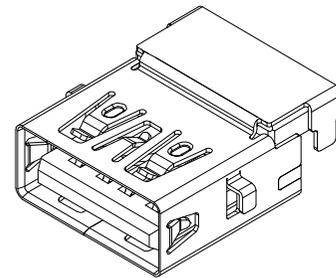
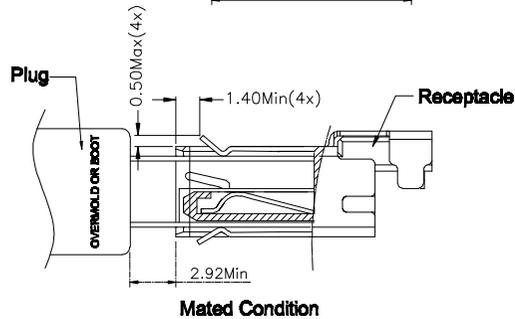
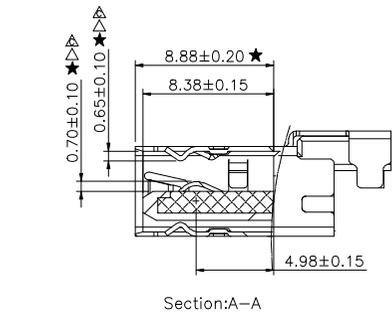
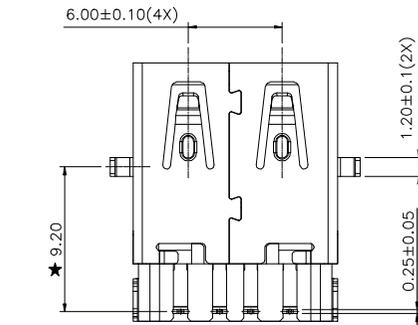


环保物料 HF

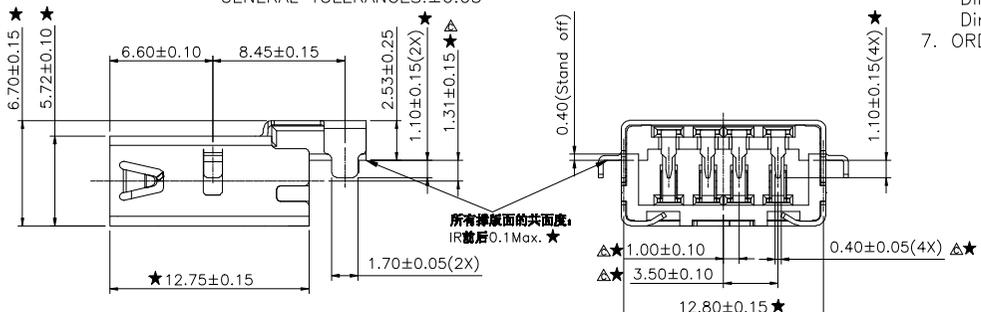

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ±0.05

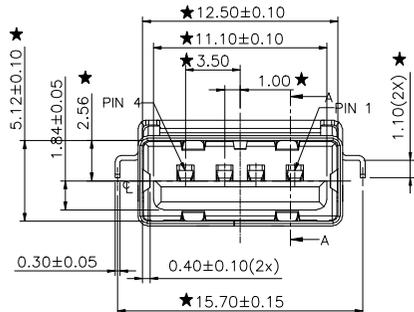

- NOTES:
- MECHANICAL CHARACTERISTIC
 - Mating Force: 6N~20N(0.61Kgf~2.04Kgf).
Unmating Force: 10N~20N(1.02Kgf~2.04Kgf,Initial)
8N~20N(0.82Kgf~2.04Kgf,After Durability Cycles)
 - Contact retention: 5N/pin min after IR
 - ELECTRICAL CHARACTERISTIC
 - Rating Voltage: 30V AC.
 - Current Rating: 1.8A(For VBUS And GND Pin)
Other Contacts 0.25A
 - Contact Resistance: 30m Ohm Max, after 10m Ohm
 - Insulation Resistance: 1000M Ohm Min
 - Dielectric Withstanding Voltage: 500V AC Min
 - TEMPERATURE
 - Operating Temperature: -40°C~+85°C
 - Salt Spray: 48Hours.
 - Burr: 0.05mm Max.
 - Tape and reel packing satisfy EIA-364-481-D standard.
 - Dimension marked Δ should 100% CCD inspecte
Dimension marked \triangle should CPK>1.33
Dimension marked \star should SIP inspecte by QC and IQC
 - ORDER INFORMATION:

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
Shell	Shield

CONNECTOR BOM:

ITEM	PART NAME	QTY	MATERIA	FINISH/PLATING
3	HOUSING	1	LCP	BLACK,UL94 V-0
2	SHELL	1	SUS201-H,T=0.30	NI 50U"MIN PLATED OVER ALL
1	4P CONTACT	4	C2680-H,T=0.25	CONTACT AREA 1U"MIN.SOLDER AREA PLATING 50U"MIN MATTE TIN,UNDER PLATING 50U"MIN NICKEL

REV.	REVISION RECORD	DATE	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	17.06.23	1:1			W-USB2-CH131-023	ENDE05
A1	修改PCB LAYOUT发行	18.03.23	APPROVED				
A2	更新图框发行	21.07.06	DESIGNER				
A3	按客户标准更新图纸	23.09.06	DRAWN	Micky Ma	23.09.06	TITLE USB2.0 AF R/A DIP RVS TYPE C/H=-1.31mm	




PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
- ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED IN THE CHART.




PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-USB2-CH131-023	3500 (PCS)	350 (PCS)	10

1. QUANTITY: 350 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

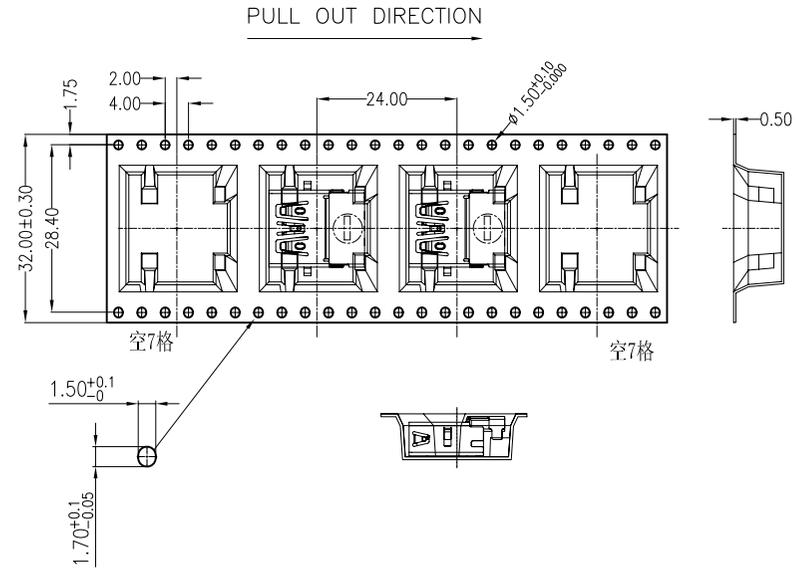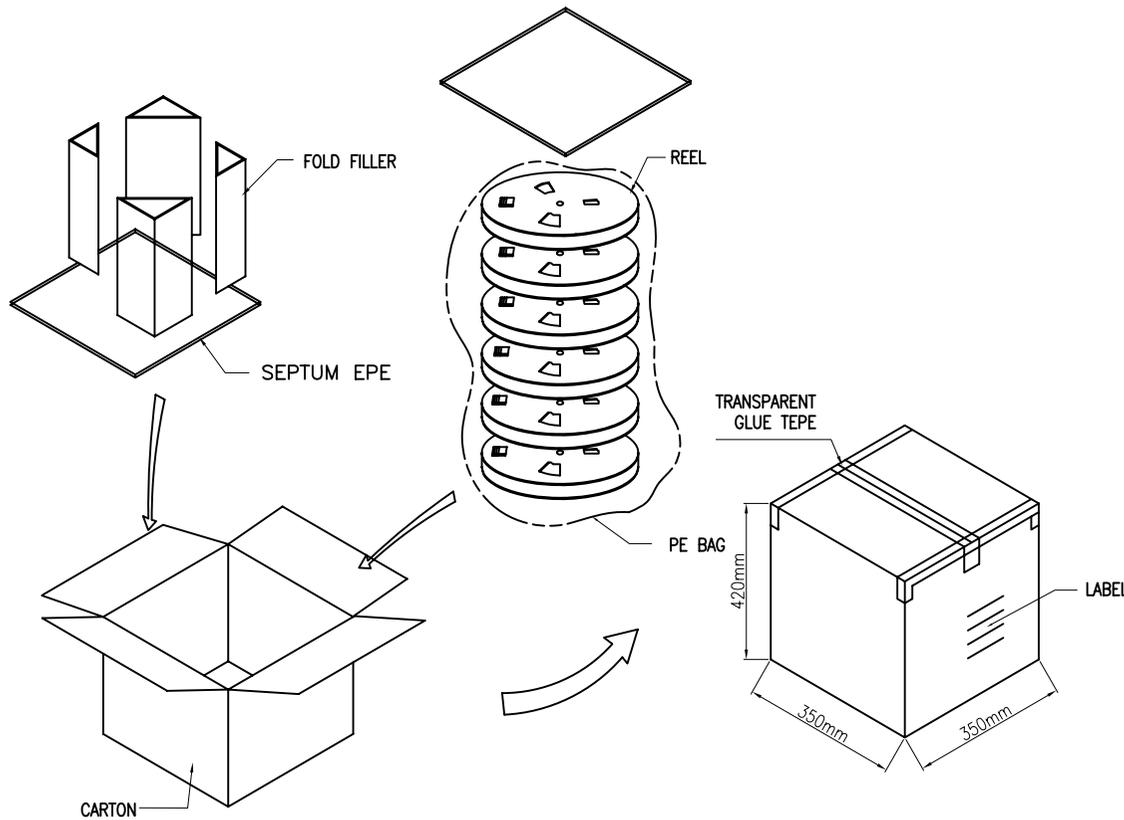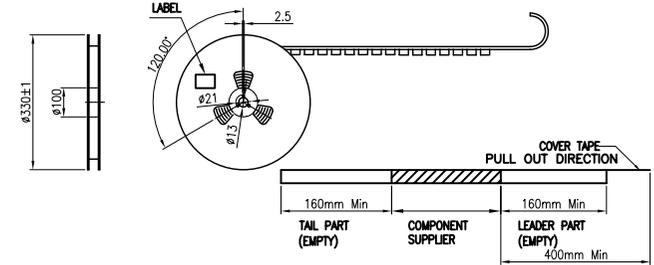

一般公差 GENERAL TOLERANCE					绘图 DR.
X.X	±0.30	X'	±2'	校对	料号 PART NO. W-USB2-CH131-023
X.XX	±0.20	X.X'	±1'	审核	
X.XXX	±0.10	▲ MAJOR DIM.		审核	
单位 UNIT	mm			核准 APPD.	品名 TITLE USB2.0 AF R/A DIP RVS TYPE C/H=-1.31mm(包装规范)

文件编号 NUMBER
ENDPT01

JCTC ®		
TERMINAL & CONNECTORS		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A2

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A2	21.07.06	更新图框发行	董东平	杨章雄
A1	18.03.23	修改PCB LAYOUT发行	董东平	杨章雄
A0	17.06.23	新图面发行	董东平	杨章雄