

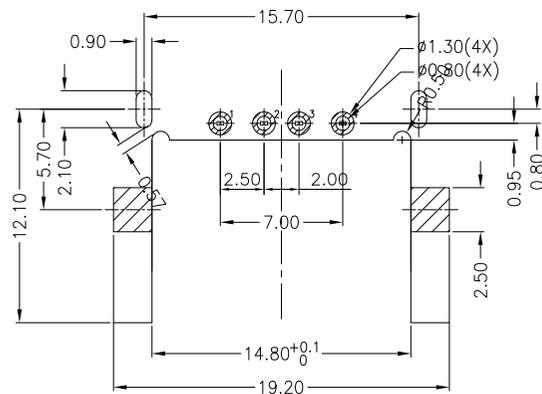

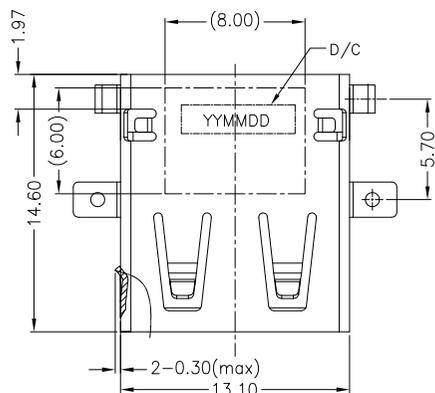
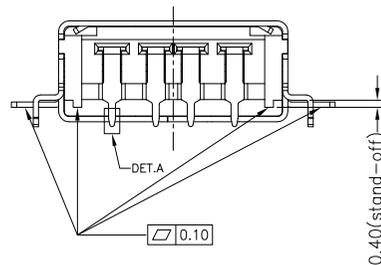


环保物料



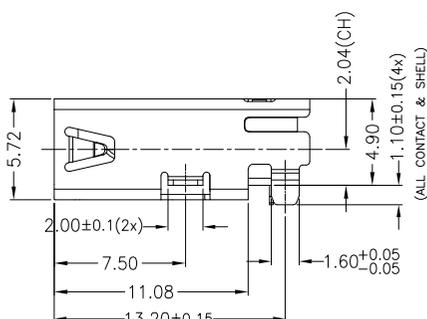


RECOMMENDED PCB LAYOUT (TOP VIEW)  
GENERAL TOLERANCES: ±0.05 (t=1.2)

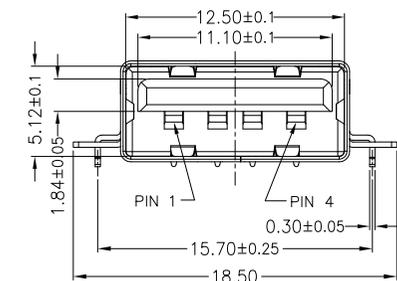

W-USB2-CH204-XX 7

Solder Area plating on contacts  
7: Tin G: G/F  
Contact Area plating on contacts  
00: G/F 03: Au 3u"  
05: Au 5u" 10: Au 10u"  
15: Au 15u" 30: Au 30u"

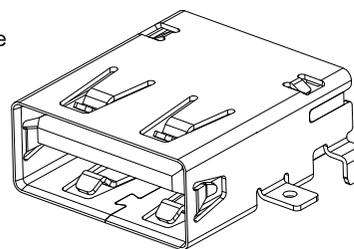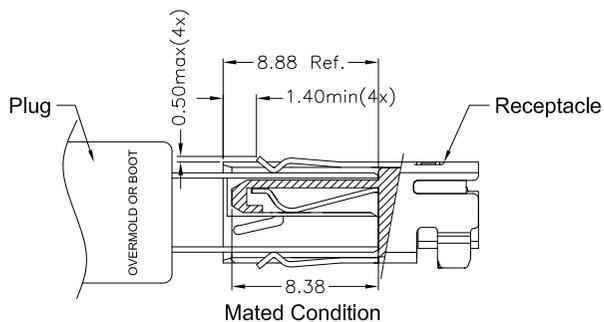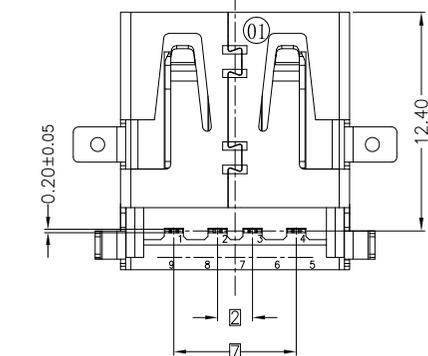

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
Shell	Shield

A2		21.07.08	更新图框发行	董东平	杨章雄	一般公差 GENERAL TOLERANCE X.X ±0.30 X' ±2' X.XX ±0.20 X.X' ±1' X.XXX ±0.10 ▲ MAJOR DIM. 单位 UNIT mm	绘图 DR.	料号 PART NO. W-USB2-CH204-XX7	文件编号 NUMBER ENDPT01	<b>JCTC</b> <sup>®</sup> TERMINAL&CONNECTORS						
A1		20.01.02	按实物修改尺寸	董东平	杨章雄		校对 CHK.						品名 TITLE USB2.0 AF R/A DIP TYPE CH=2.04	比例 SCALE 1/1	SHEET 1/1	版次 REV. A2
A0		19.05.31	换图框发行	李兴泽	杨章雄		审核 CHK.									
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.			核准 APPD.									

# 环保物料


## PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON  
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED  
IN THE CHART.




PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-USB2-CH204-XX7	3500 (PCS)	350 (PCS)	10

1. QUANTITY: 350 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

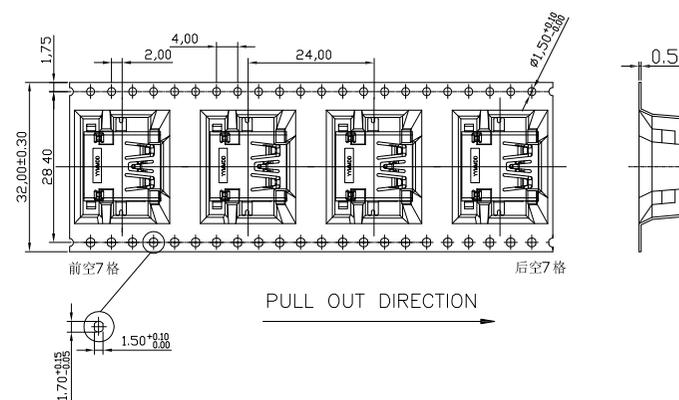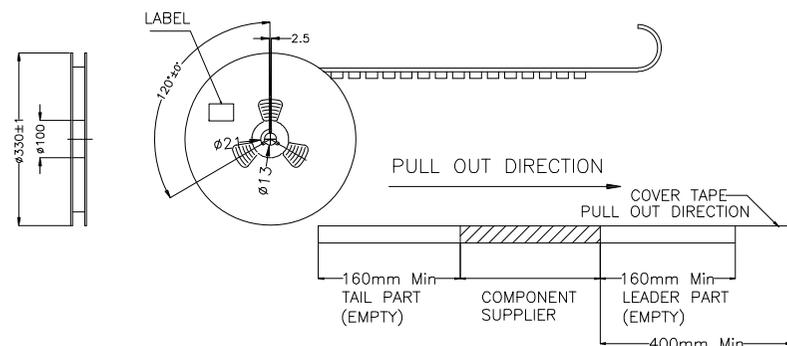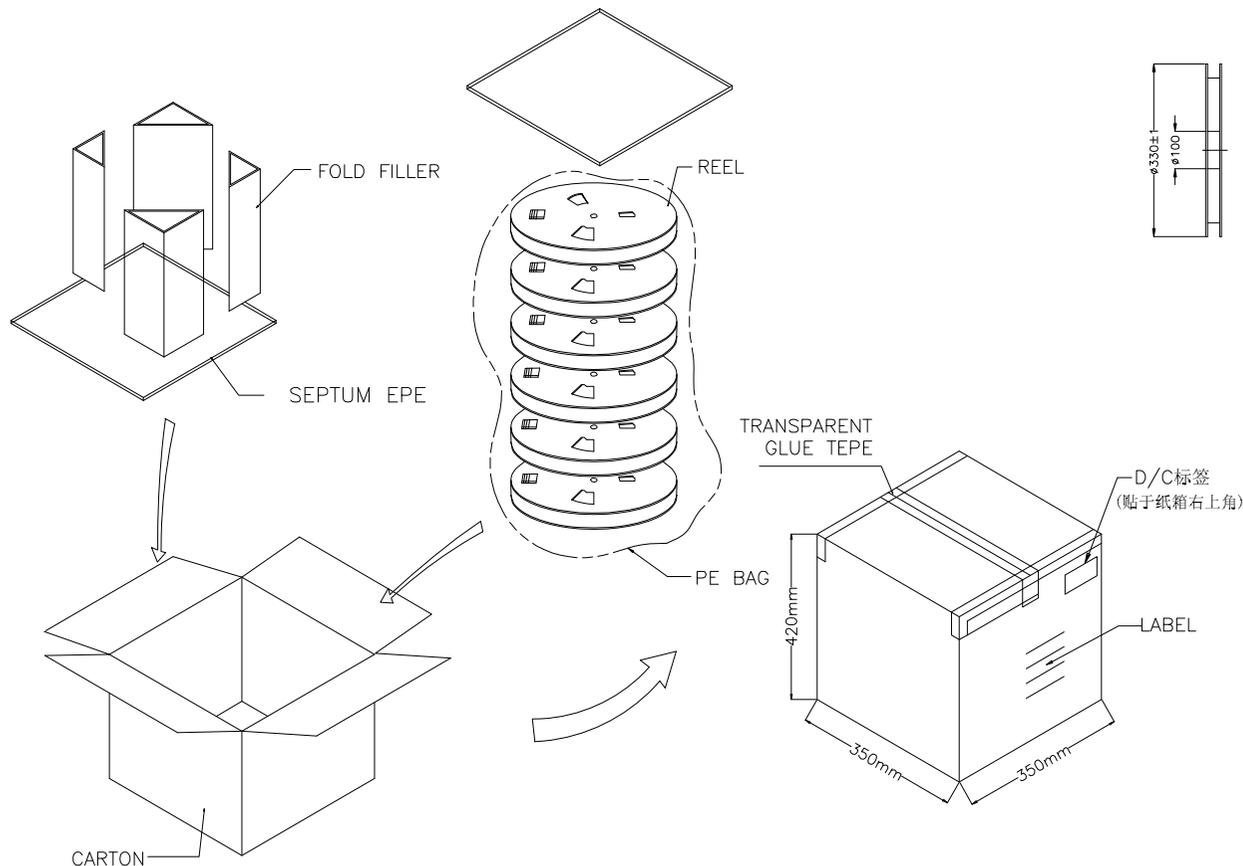

一般公差 GENERAL TOLERANCE					绘图 DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS		
X.X	±0.30	X'	±2'	校对	DR.	W-USB2-CH204-XX7		ENDPT01					
X.XX	±0.20	X.X'	±1'	审核	CHK.								
X.XXX	±0.10	▲	MAJOR DIM.	审核	CHK.								
单位 UNIT	mm	 		核准	APPD.	品名 TITLE		USB3.0 AF R/A DIP TYPE CH=2.04		比例 SCALE	SHEET	版次 REV.	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.						1/1	1/1	A1	