

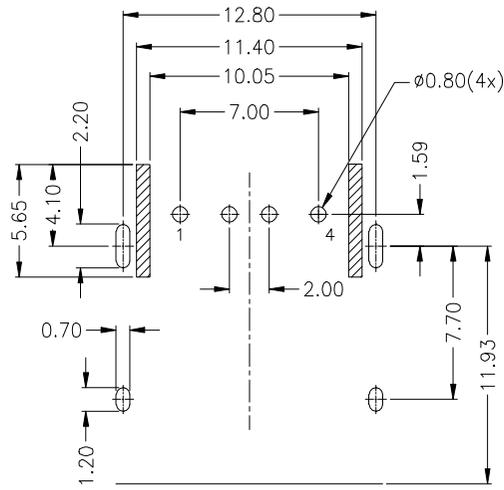
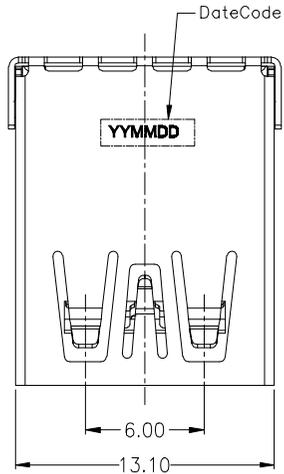
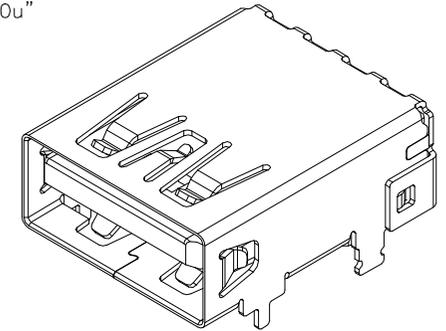
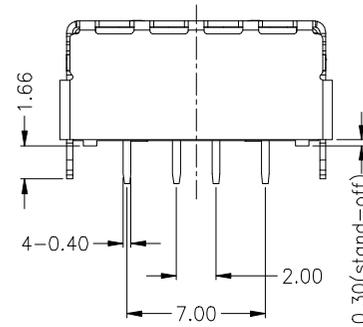


环保物料 HF

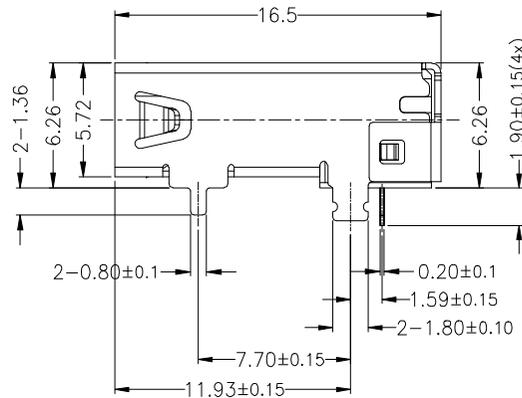

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES: ±0.05 (t=1.2)

- NOTES:
- MATERIAL AND PLATING:**
Housing: PA9T+30%G.F,UL94V-0,Black./White
Contact: Phosphor Bronze,
Au And 100u" Matte Sn on Solder Tail,
All over 50u" Ni Plated.
Shell: Stainless Steel, Ni 80u" Min Plated.
 - MECHANICAL CHARACTERISTIC**
Mating Force: 35N(3.57Kgf) Max.
Unmating Force: 10N(1.02Kgf) Min.
Durability: 1,500 Cycles.
 - ELECTRICAL CHARACTERISTIC**
Current Rating: 1.5A
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min.
Dielectric Withstanding Voltage: 500V AC.
 - TEMPERATURE**
Openrating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
 - DATE CODE: YYMMDD (Y:YEAR M:MONTH D:DATE)**
 - ORDER INFORMATION:**
W-USB2-CH340-XX X
 A B
A: Contact Area plating on contacts
02: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"
B: Housing Colour
2: Black
3: White

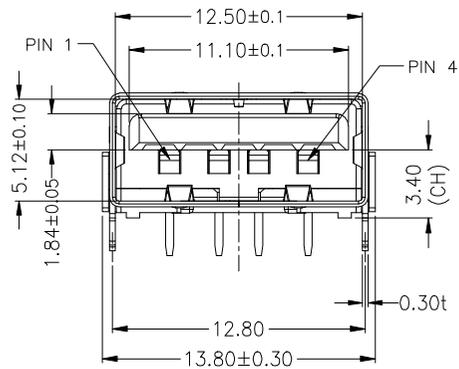

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
Shell	Shield

REV.	REVISION RECORD	DATE	UNIT: MM SIZE: A4	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.					
A0	新图面发行	19.04.22		LINEAR	ANGLES	APPROVED			W-USB2-CH340-XXX	ENDE05					
A1	换图框发行	23.10.10		0.00±0.30	X'REF±6'	DESIGNER			TITLE			REV	A1	SHEET	1/1
				0.00±0.20	X'±3'	DRAWN	Mlicky Ma	23.09.19	USB2.0 AF R/A DIP TYPE CH=3.4mm						


环保物料 HF

PACKAGING INSTRUCTION I:




1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-USB2-CH340-XXX	3500 (PCS)	350 (PCS)	10

1. QUANTITY: 350 PCS
2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

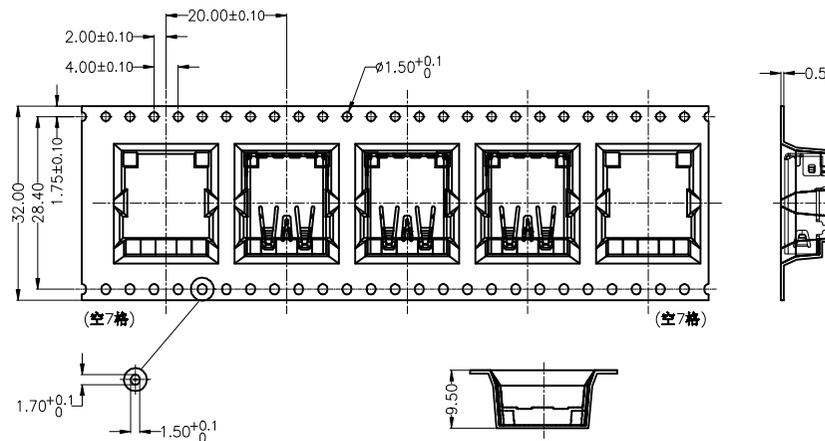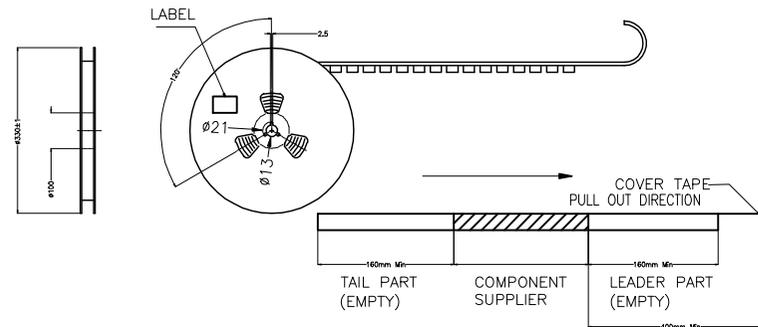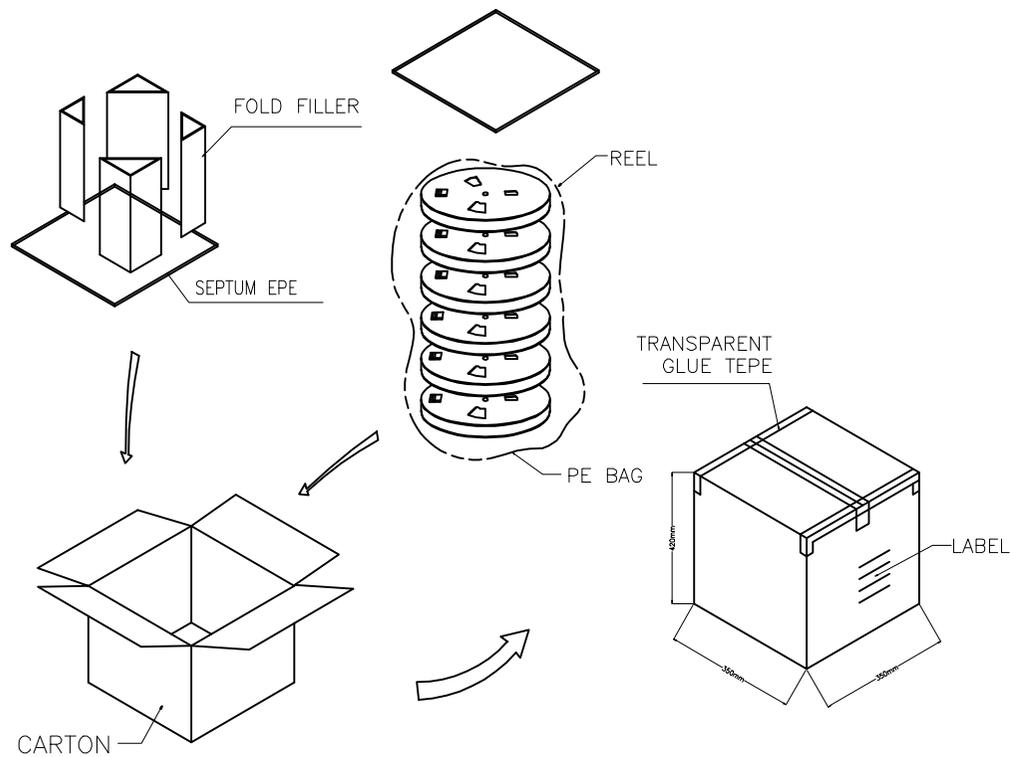

REV.	REVISION RECORD	DATE	UNIT: MM SIZE: A4	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	19.04.22		LINEAR	ANGLES	APPROVED								
A1	换图框发行	23.10.10		0.0±0.30	X'REF±6'				W-USB2-CH340-XXX	ENDE05				
				0.00±0.20	X'±3'	DESIGNER			TITLE					
				0.000±0.10	X'X'±2'	DRAWN	Mlicky Ma	23.09.19	USB2.0 AF R/A DIP TYPE CH=3.4mm		REV	A1	SHEET	1/1