


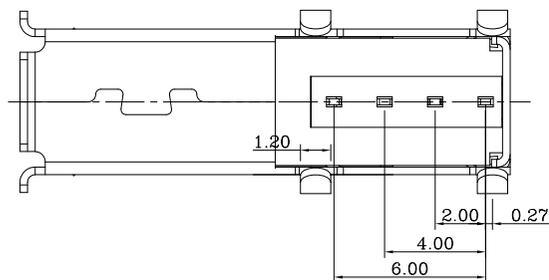
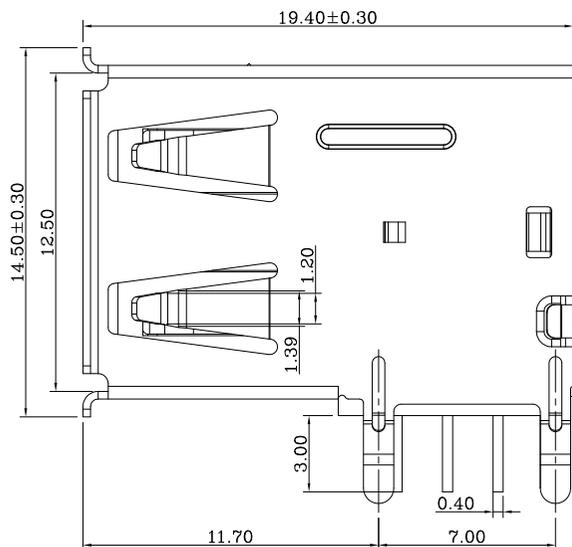
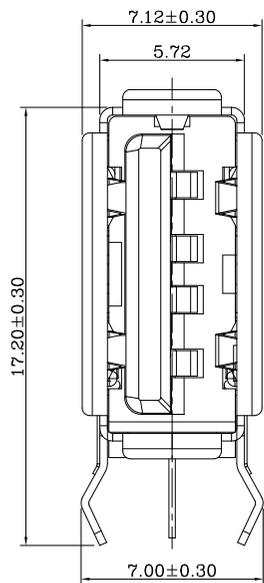


环保物料

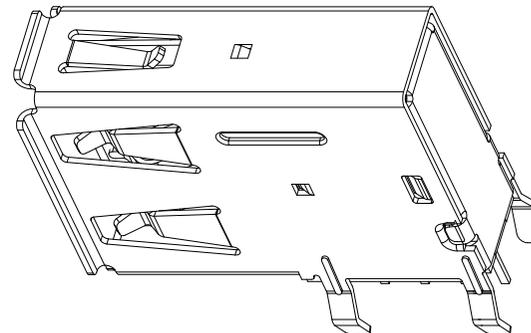

Recommended PCB Layout
TOLERANCES: ±0.05

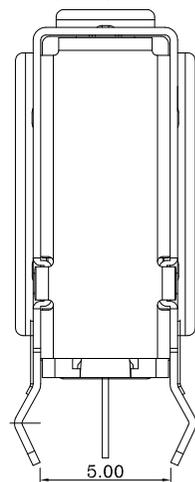


Specification

- *Electrical Characteristics:
 - Contact Current Rating:1 Amperes.
 - Dielectric Withstanding Voltage:AC 500V R.M.S.
 - Insulation Resistance:500MΩ Min.
 - Contact Resistance:30mΩ Max.
- *Environmental:
 - Operating Temperature:−40iăC~+60iăC.
- *Mechanical Characteristics:
 - Mating Force:3.57kg Max.
 - Unmating Force:0.7kg Min.
- *Material:
 - Housing:PBT 白色
 - Contact:BRASS C2680
 - Shell:BRASS/SPCC

一般公差 GENERAL TOLERANCE

X.X	±0.30	X'	±2'
X.XX	±0.20	X.X'	±1'
X.XXX	±0.10	▲	MAJOR DIM.

单位 UNIT
mm



绘图 DR.
校对 CHK.
审核 CHK.
核准 APPD.

料号 PART NO.
W-USB2-JH137-002

文件编号 NUMBER
ENDPT01




品名 TITLE
USB 2.0 AF 侧立式长体90°弯脚DIP

比例 SCALE	SHEET	版次 REV.
1/1	1/1	A1


版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A1	21.08.04	更新图框发行	董东平	杨章雄
A0	18.07.30	新图面发行	李兴泽	杨章雄

环保物料


1. 把已全檢好的 USB AF 侧插长体插板 成品, 依圖所示放入專用的3#吸塑盘內. 每盤裝100PCS; 注意產品放置方向. (如下圖).

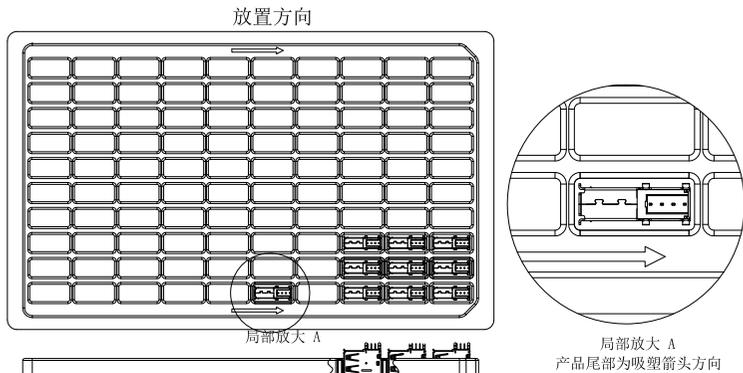


2. 产品放滿100PCS 后, 將上盖与 下盖扣合(如下圖).

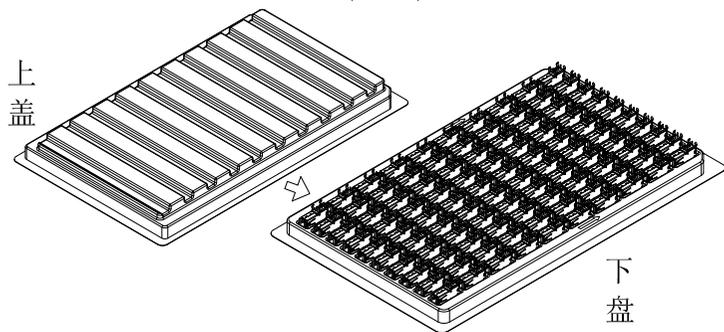

3. 裝好成品的包裝盤, 按圖示疊起5层, 并按照圖示用PE膜捆绑后裝入紙箱, 并在每两摞間放一块紙板.

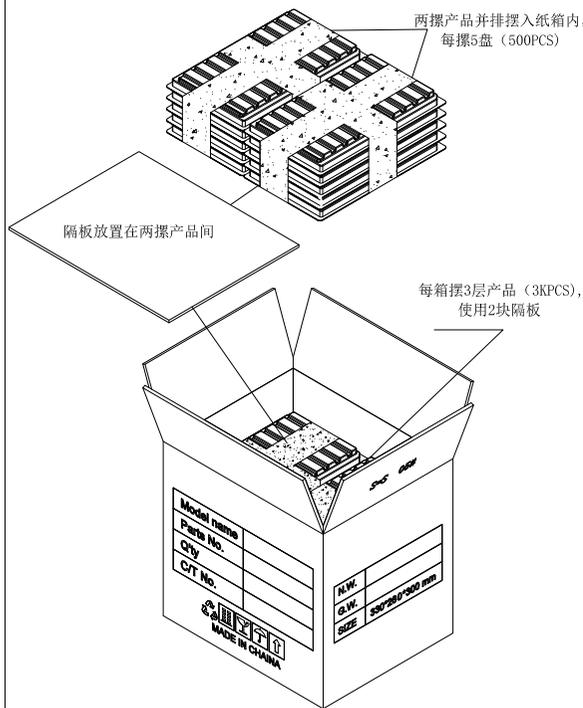

4. 外箱規格及外箱標籤貼附要求. (客戶指定要求之標籤及規格參照“客戶包裝規範”)

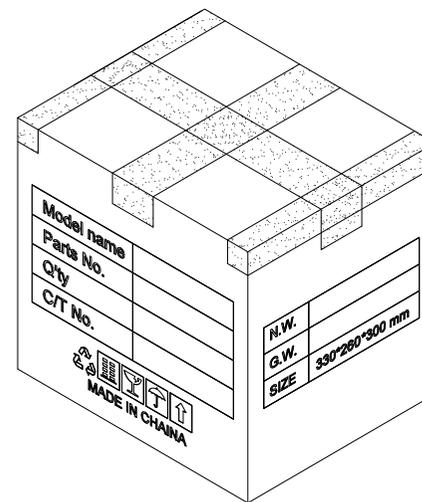

紙箱規格: 330*260*300mm

					一般公差 GENERAL TOLERANCE		繪圖 DR.		料號 PART NO.		文件編號 NUMBER			
					X.X ±0.30	X' ±2'	校對 CHK.		W-USB2-JH137-002		ENDPT01			
					X.XX ±0.20	X.X' ±1'	審核 CHK.		品名 TITLE		比例 SCALE		SHEET	
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		USB 2.0 AF 側立式長體90° 彎腳DIP		1/1		版次 REV.	
版次 REV.	日期 DATE	變更內容 DESCRIPTION	審核 CHK.	核准 APPD.	單位 UNIT	mm					1/1		A1	