
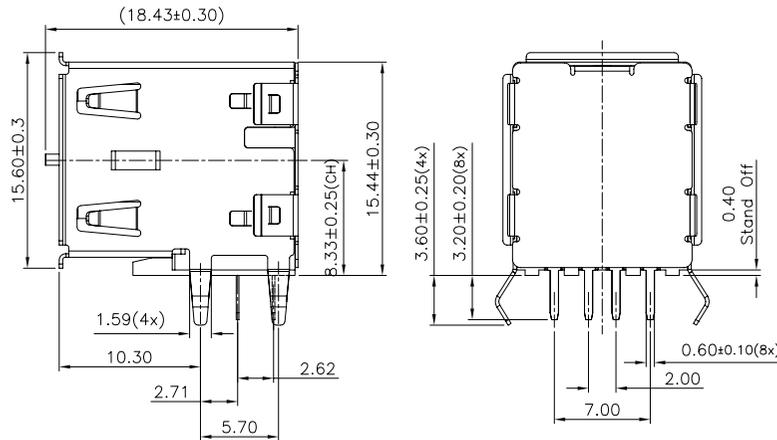
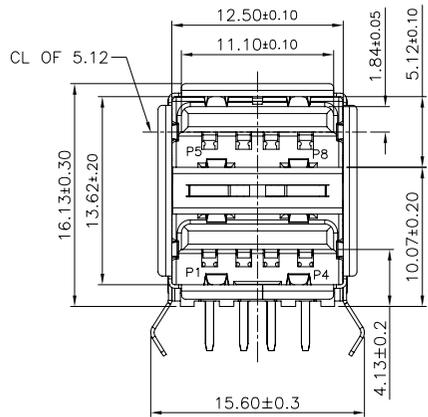
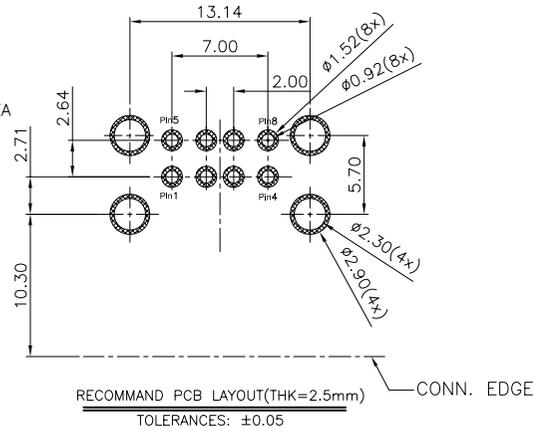


环保物料

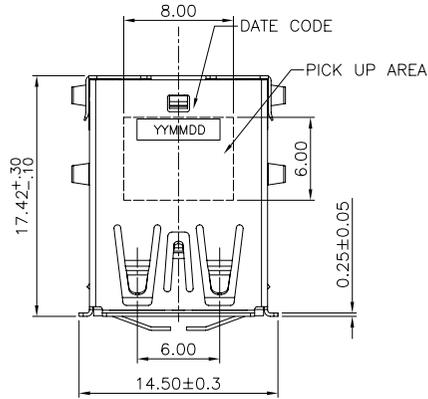


NOTES:

- MATERIAL AND PLATING:**
Housing/Cover: PA9T+30%G.F,UL94V-0,Black.
Contact: Copper Alloy,Au And Sn Plated.
Front Shell: Steel, 50u" NICKEL PLATED.
Back/Middle Shell: Steel, NO PLATED.
- MECHANICAL CHARACTERISTIC**
Mating Force: 35N(3.57Kgf) Max.
Unmating Force: 10N(1.02Kgf) Min.
Durability: 1500 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 1.5A
Voltage Rating: 30V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min.
Dielectric Withstanding Voltage: 500V AC.
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATECODE INFORMATION:**
YMMDD (Y:YEAR M:MONTH D:DATE)
- ORDER INFORMATION:**

W-USB2-SZ833-UXX

Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"




| USB2.0 CONTACT PIN | | | | | |
|--------------------|------|-----|-----|-----|--------|
| PIN NO. | 1/5 | 2/6 | 3/7 | 4/8 | Shell |
| NAME | VBUS | D- | D+ | GND | Shield |

一般公差 GENERAL TOLERANCE

| | | | |
|-------|-------|--------------|-----|
| X.X | ±0.30 | X* | ±2* |
| X.XX | ±0.20 | X.X* | ±1* |
| X.XXX | ±0.10 | ▲ MAJOR DIM. | |

单位 UNIT mm



绘图 DR.

李兴涛

校对 CHK.

赵立

审核 CHK.

杨章雄

核准 APPD.

JGTC 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司

品名 TITLE
DUAL STACK USB 2.0 A TYPE
RECEPTACLE STD RA DIP C/H=8.33mm

料号 PART NO.
W-USB2-SZ833-UXX

文件编号 NUMBER
ENDPT01

| 比例 SCALE | SHEET | 版次 REV. |
|----------|-------|---------|
| 1/1 | 1/1 | A0 |

| 版次 REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. |
|---------|----------|------------------|---------|----------|
| A0 | 20.07.27 | 新图框发行 | 李兴涛 | 杨章雄 |


环保物料

PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.



| PRODUCT P/N | PARTS PER SHIPPING CARTON | PARTS PER TRAY (S.P.Q.) | TOTAL TRAYS PER PRIMARY CARTON |
|------------------|---------------------------|-------------------------|--------------------------------|
| W-USB2-SZ833-UXX | 1200 (PCS) | 60 (PCS) | 20 |

1. 60pcs/盘

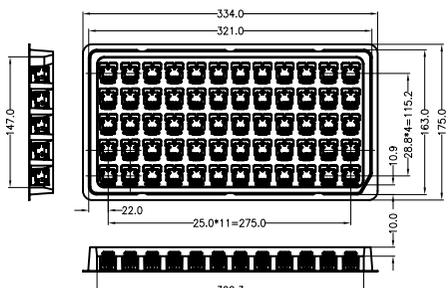


(底盒材质:PET, 透明)


2. 10盘/扎
(600pcs)




(在每一扎最顶部盖1PCS空底盒)




3. 2 扎并排/箱
(1200pcs)

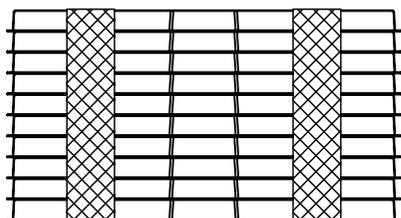

5. 外箱封成“工”字型

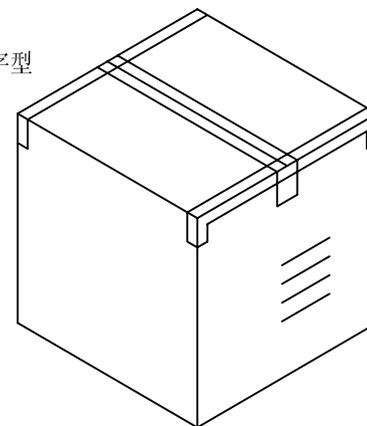

4. 1200pcs/箱

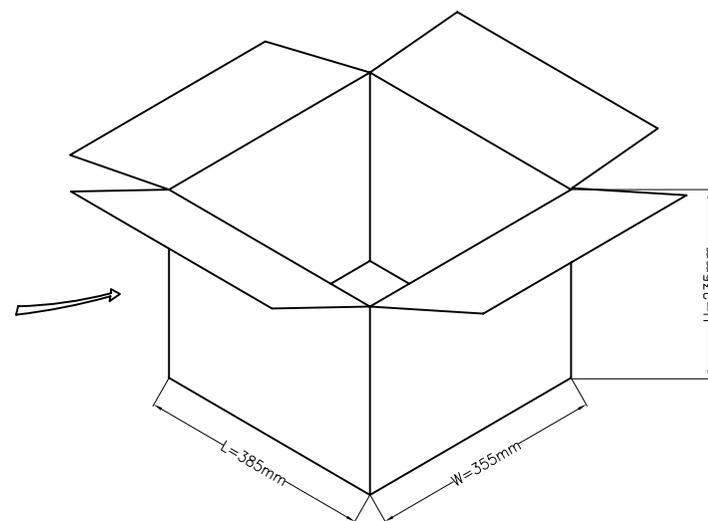

| 版次REV | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. |
|-------|----------|------------------|---------|----------|
| A0 | 20.07.27 | 新图框发行 | 李兴涛 | 杨章雄 |

| 一般公差 GENERAL TOLERANCE | |
|------------------------|--------------|
| X.X ±0.30 | X* ±2* |
| X.XX ±0.20 | X.X* ±1* |
| X.XXX ±0.10 | ▲ MAJOR DIM. |

| | |
|----------|-----|
| 绘图 DR. | 李兴涛 |
| 校对 CHK. | 赵立 |
| 审核 CHK. | 杨章雄 |
| 核准 APPD. | |

| |
|------------------------------------|
| JGTC ® 胜蓝科技股份有限公司 |
| TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司 |
| 品名 TITLE |
| DUAL STACK USB 2.0 A TYPE |
| RECEPTACLE STD RA DIP C/H=8.33mm |

| | |
|-------------|------------------|
| 料号 PART NO. | W-USB2-SZ833-UXX |
| 文件编号 NUMBER | ENDPT01 |
| 比例 SCALE | 1/1 |
| SHEET | 1/1 |
| 版次 REV. | A0 |