
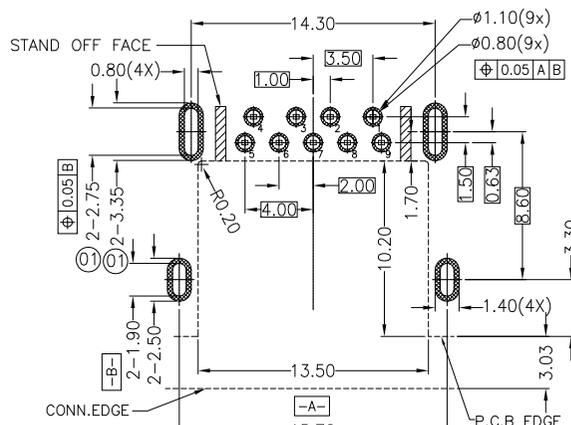









# 环保物料

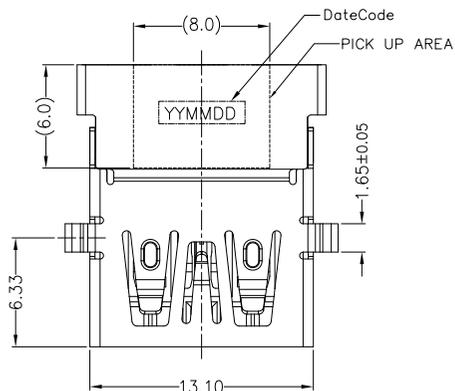

RECOMMENDED PCB LAYOUT (TOP VIEW)  
GENERAL TOLERANCES: ±0.05 (t=1.2)

## NOTES:

- MATERIAL AND PLATING:**  
Housing: LCP+30%G.F,UL94V-0,Blue.  
Contact(4Pin): Phosphor Bronze,Au And Sn Plated.  
Contact(5Pin): Brass,Au And Sn Plated.  
Shell: Stainless Steel,Ni Plated.
- MECHANICAL CHARACTERISTIC**  
Mating Force: 6N-25N(0.6Kgf-2.5Kgf)  
Unmating Force: 10N-25N(1.0Kgf-2.5Kgf)  
Durability: 5,000 Cycles.  
Durability Mating Force:6N-25N(0.61Kgf~2.5Kgf).  
Durability Unmating Force:8N-25N(0.81Kgf~2.5Kgf).
- ELECTRICAL CHARACTERISTIC**  
Current Rating: 1.8A(Pin1,4),  
0.25A For Other Contacts.  
Voltage Rating: 30V AC Max.  
Contact Resistance: 30m Ohm Max.  
Insulation Resistance: 100M Ohm Min.  
Dielectric Withstanding Voltage: 100V AC.
- TEMPERATURE**  
Openrating Temperature: -40°C~+85°C  
Storage Temperature: -60°C~+105°C
- DATECODE INFORMATION:**  
YYMMDD (Y:YEAR M:MONTH D:DATE)

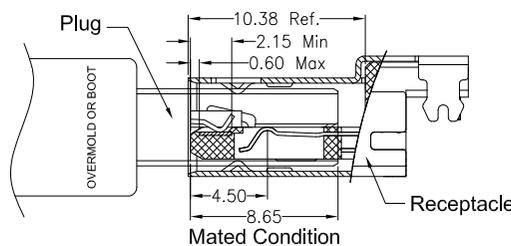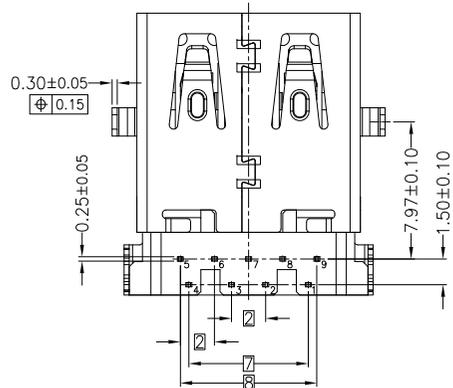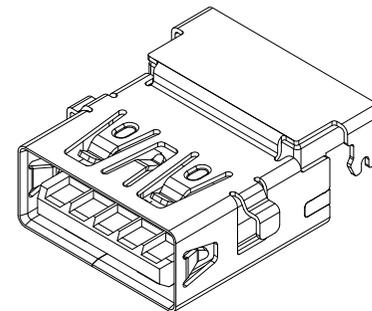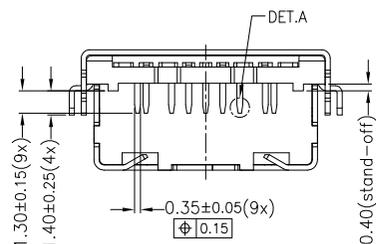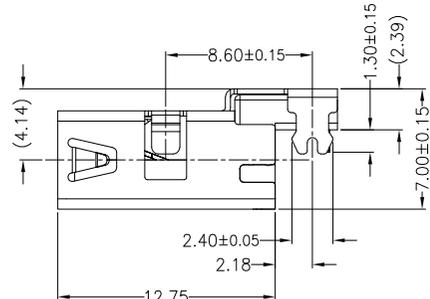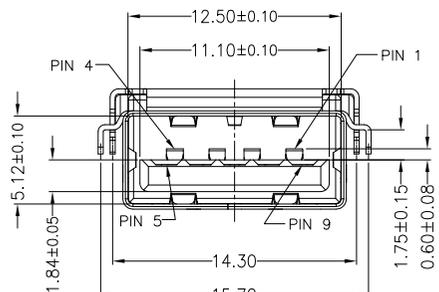

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

A2 21.07.06 更新图框发行 董东平 杨章雄		一般公差GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS		
A1 20.03.04 更新PCB板LAYOUT尺寸 董东平 杨章雄		X.X ±0.30 X' ±2°		校对 CHK.		W-USB3-CH175-008		ENDPT01				
A0 18.07.19 新图面发行 李兴泽 杨章雄		X.XX ±0.20 X.X' ±1°		审核 CHK.		品名TITLE		USB3.0 AF R/A DIP RVS TYPE		比例SCALE		
版本REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT	mm	CH= -1.75			1/1	SHEET 1/1	版次 REV. A2

# 环保物料


## PACKAGING INSTRUCTION I:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON  
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED  
IN THE CHART.




PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
W-USB3-CH175-008	3500 (PCS)	350 (PCS)	10

1. QUANTITY: 350 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

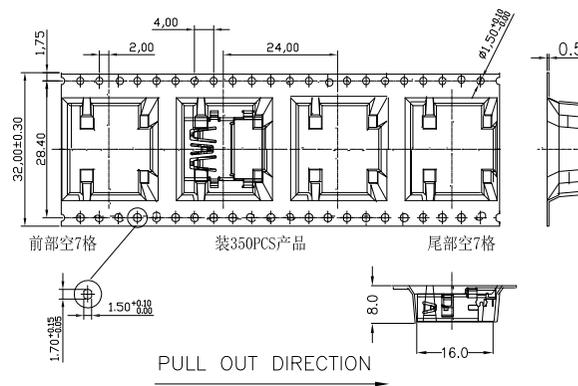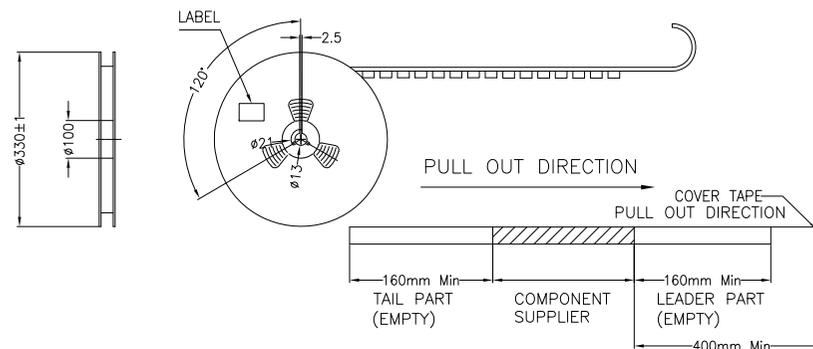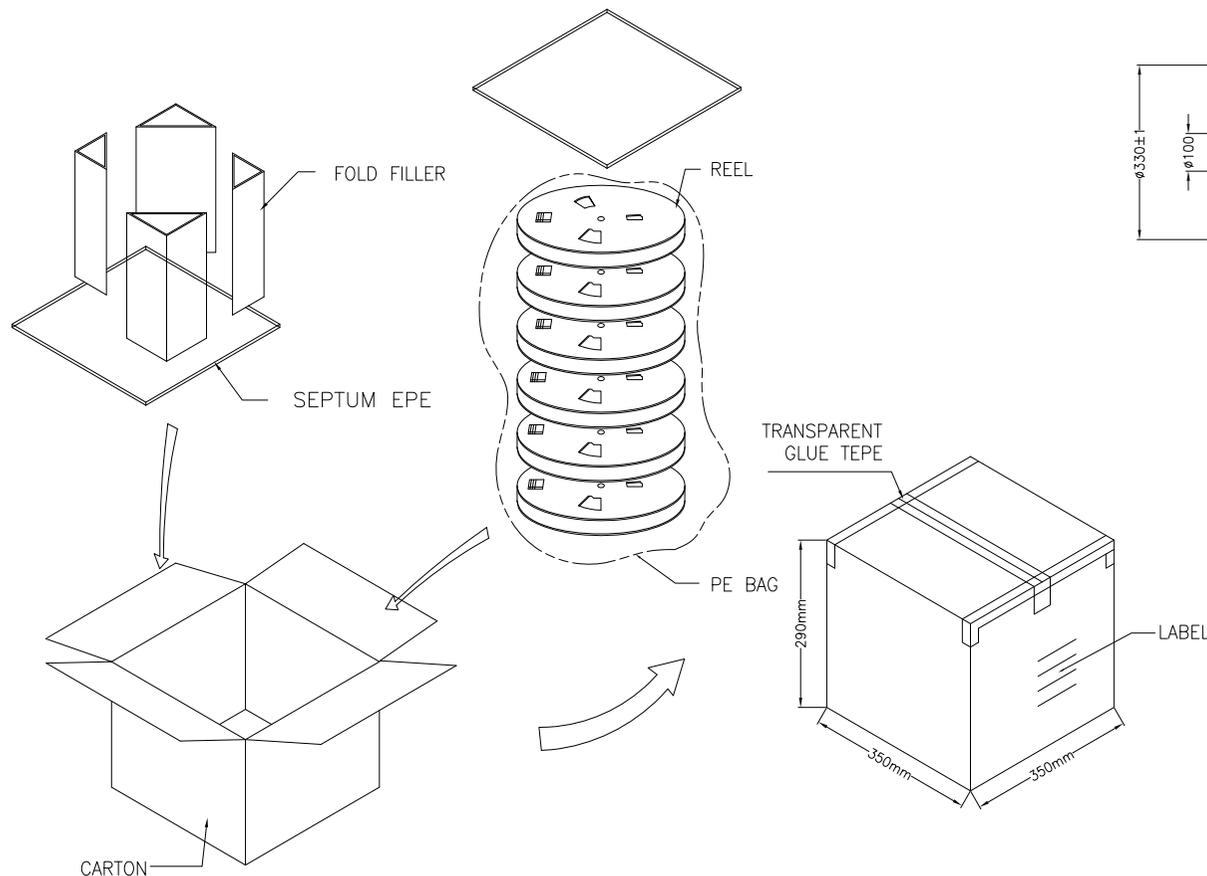

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		 TERMINAL & CONNECTORS		
					X.X	±0.30	X'	±2'	W-USB3-CH175-008		ENDPT01				
					X.XX	±0.20	X.X'	±1'	品名 TITLE		USB3.0 AF R/A DIP RVS TYPE		比例 SCALE	SHEET	版次 REV.
					X.XXX	±0.10	▲ MAJOR DIM.		CH= -1.75		1/1	2/2	A1		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm									