
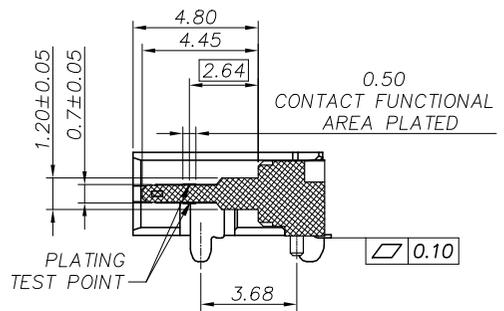
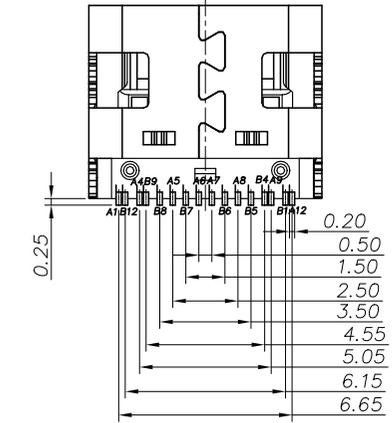
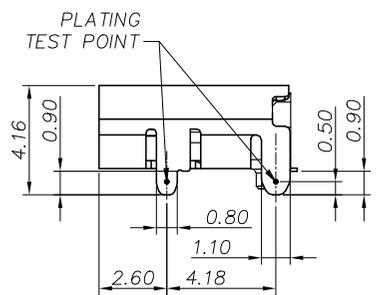
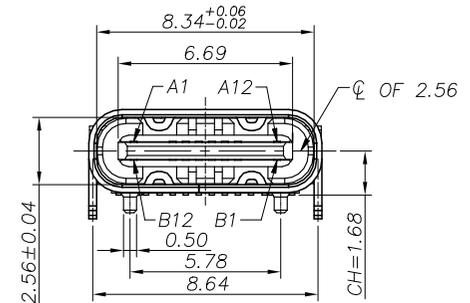



RoHS 2.0+HF

检验规范

1
2
3
4
5
6
7

1
2
3
4
5
6
7

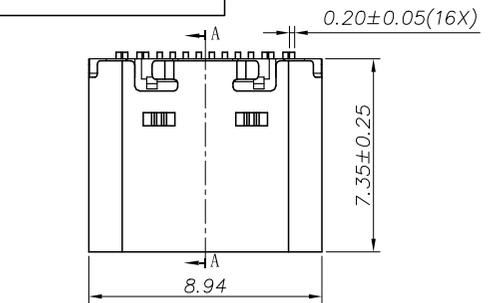

SECTION: A-A



NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
 - 2.CONTACTS: COPPER ALLOY
 - 3.MID PLATE: STAINLESS STEEL
 - 4.FRONT SHELL: STAINLESS STEEL
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - Ni UNDER PLATED OVER ALL.(THICKNESS FOLLOW THE P/N)
 - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT. (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
 - 2-2.FRONT SHELL:
 - Ni 50u" MIN. UNDER PLATED ON THE SOLDER AREA.
 - Ni 30u" MIN. UNDER PLATED ON THE OTHER AREA.
 - 2-3.SHIELD PLATE&EMI PLATE:
 - CLEAR ONLY
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING:5.0A
VOLTAGE RATING: 5.0V
 - 4-2. LLCR:
 - VBUS & GND PINS AND OTHER PINS: 40m*/PIN MAX.
 - SHIELD: 50m*/MAX.
 - LLCR MAX. CHANGE OF ALL PINS: 10m*
 - 4-3.INSULATION RESISTANCE: 100M* MIN
 - 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25-C~+85-C.
- 6.IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

				一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		JCTC ®	
				X.X ±0.35	X° ±6°	审核 CHK.		W-UTB-168-007		ENDPW03			
A0		18.08.07		新图面发行		李兴泽 李兴泽		品名 TITLE		USB C F TYPE单排SMT四脚插板 有柱外壳无凸包CONN.		比例 SCALE 1:1	
版次 REV.		日期 DATE		变更内容 DESCRIPTION		审核 CHK. 核准 APPD.		核准 APPD.					
A		B		C		D		E		F			

RoHS 2.0+HF

检验规范

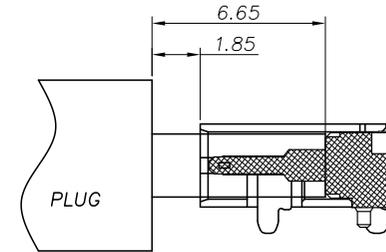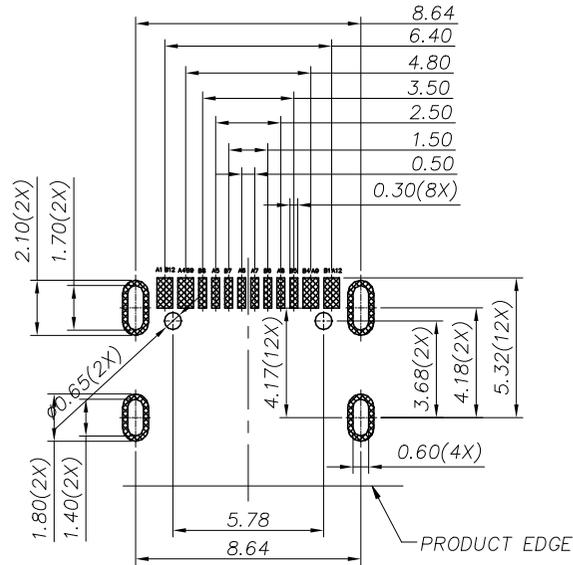

AFTER MATING

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER	
					X.X ±0.35	X° ±6°	审核 CHK.		W-UTB-168-007		ENDPW03	
					X.XX ±0.25	X.X° ±3°	核准 APPD.		品名 TITLE		比例 SCALE	
					X.XXX ±0.15	▲ MAJOR DIM.	核 准		USB C F TYPE单排SMT四脚插板		1:1	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm		有柱外壳无凸包CONN.		SHEET 2/2		
A0	18.08.07	新图面发行	李兴泽	李兴泽						版次 REV. A0		

