
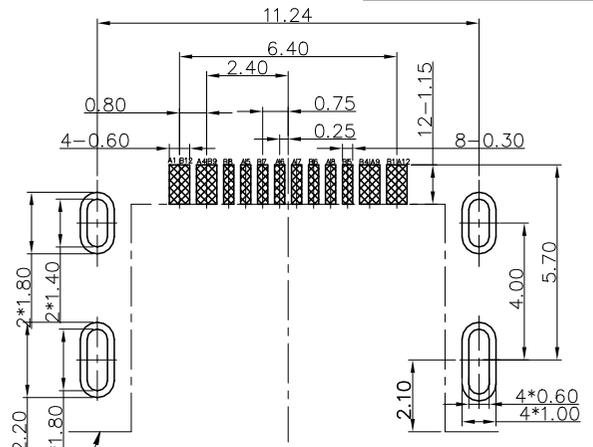
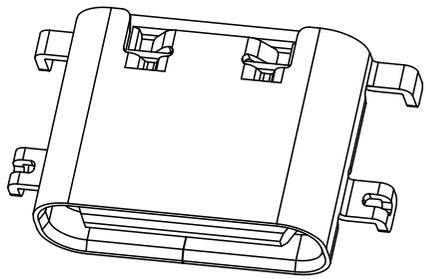


RoHS 2.0+HF

检验规范



1
2
3
4
5
6
7

1
2
3
4
5
6
7


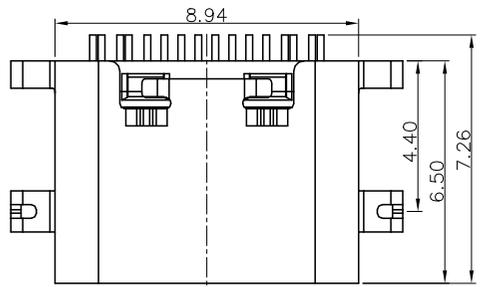


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 5.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. LNSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES

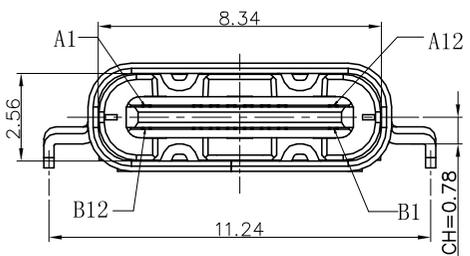

0.10

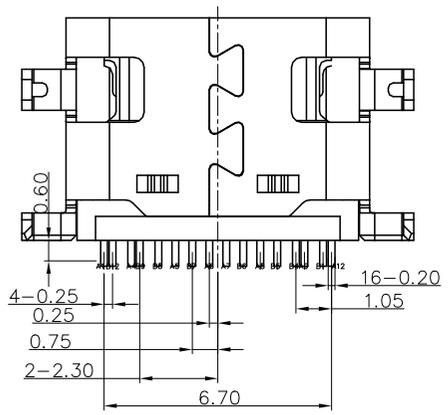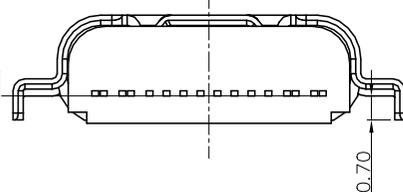

A1	GND	B12	GND	6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
A4	VBUS	B9	VBUS	5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
A5	CC1	B8	SBU2					
A6	DP1	B7	DN2	4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
A7	DN1	B6	DP2	3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
A8	SBU1	B5	CC2	2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
A9	VBUS	B4	VBUS	1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
A12	GND	B1	GND					
PIN	SIGNAL NAME	PIN	SIGNAL NAME	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

一般公差 GENERAL TOLERANCE			
X.X	±0.35	X°	±6°
X.XX	±0.25	X.X°	±3°
X.XXX	±0.15	▲	MAJOR DIM.
单位 UNIT	mm		

绘图 DR.
审核 CHK.
核准 APPD.

料号 PART NO.
W-UTB-CH080-007
文件编号 NUMBER
ENDPW03
品名 TITLE
Type C F单排16P 沉板0.8 L=6.5mm CONN.

JCTC®

比例 SCALE	SHEET	版次 REV.
1:1	1/1	A0

A0	18.09.04	换图框发行	李兴泽	李兴泽
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.

A B C D E F