

环保物料

检验规范

Note:

1.Material:

- 1.1 Housing: lcp
- 1.2 Contact:C5191,t=0.20mm
- 1.3 Shell: Zinc Alloy

2.ELECTRICAL:

2-1:CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.5A
PARALLELED FOR A TOTAL OF 3A;

2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS

2-3:DIELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;

3:MECHANICAL CHARACTERISTICS:

3-1:MATING FORCE:5~20N

3-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)

3-3:FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES
3-4:OPERATING TEMPERATURE ;-40°~80°.

4: WATERPROOF: IP-X7.










TABLE B


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

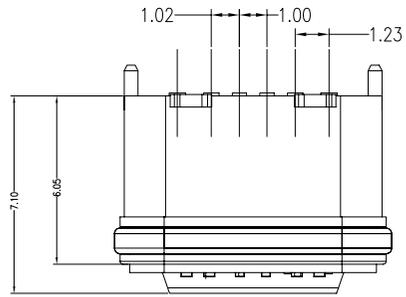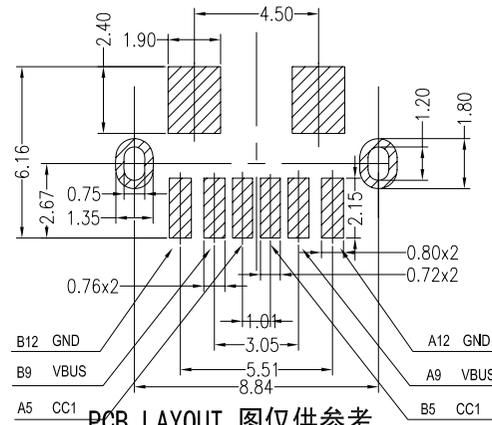

PCB LAYOUT 图仅供参考

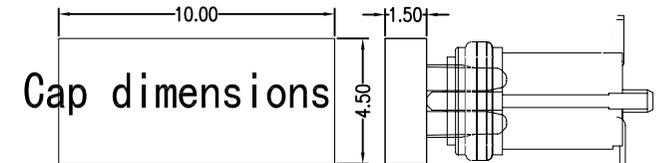

防水圈

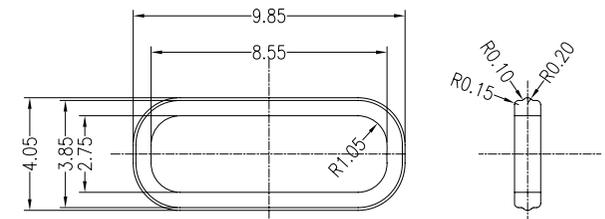

一般公差 GENERAL TOLERANCE

X.X	±0.30	X'	±2'
X.XX	±0.20	X.X'	±1'
X.XXX	±0.10	▲ MAJOR DIM.	

单位 UNIT



绘图 DR.

李兴泽

校对 CHK.

审核 CHK.

核准 APPD.

料号 PART NO.

W-UTP-6P-FS26

文件编号 NUMBER

ENDPT01

品名 TITLE

USB TYPE C 6 PIN 防水

JCTC®

TERMINAL&CONNECTORS

比例 SCALE

1/1

SHEET

1/1

版次 REV.

A0

A0 19.11.15

新图面发行

李兴泽

版次 REV.

日期 DATE

变更内容 DESCRIPTION

审核 CHK.

核准 APPD.

A

B

C

D

E

F