


- NOTES:
- MATERIAL:
 - OUTSIDE SHELL: SUS301R-1/2H T=0.20mm
 - INNER SHELL: SUS301R-1/2H T=0.20mm
 - SIGNAL: SUS301R-H T=0.10mm
 - RFI PAD: SUS316R-1/2H T=0.08mm
 - HOUSING: PA9T UL94V-0 BLACK
 - TERMINAL: C19400-H
 - PLATING:
 - TERMINAL: SEE PIN
 - SHELL: 50 μ MIN.NICKEL PLATED
 - ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 5.0 A
VOLTAGE RATING: 20.0 V
 - LLCR: VBUS& GND PINS: 40m Ω /PIN MAX
OTHER PINS : 40m Ω /PIN MAX
CHANGE OF ALL PINS: 10m Ω
 - INSULATION RESISTANCE: 100M Ω MIN.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 0.5~2.0kg.
 - WITHDRAWAL FORCE: 0.8~2.0kg.(INITIAL:1000 CYCLES) 0.6~2.0kg.(AFTER LIFE TEST)
 - LIFE TEST: 10000 CYCLES MIN
 - P/N: W-UTP-CH030-XX24
- TERMINAL PLATING CODE: _____
- A0: GOLD FLASH ON MATING AREA, MATTE Sn 60 μ Min. ON SOLDERING AREA, 80 μ Min. NICKEL UNDER PLATING OVERALL
- GE: 30 μ Au ON MATING AREA, MATTE Sn 60 μ Min. ON SOLDERING AREA, 80 μ Min. NICKEL UNDER PLATING OVERALL

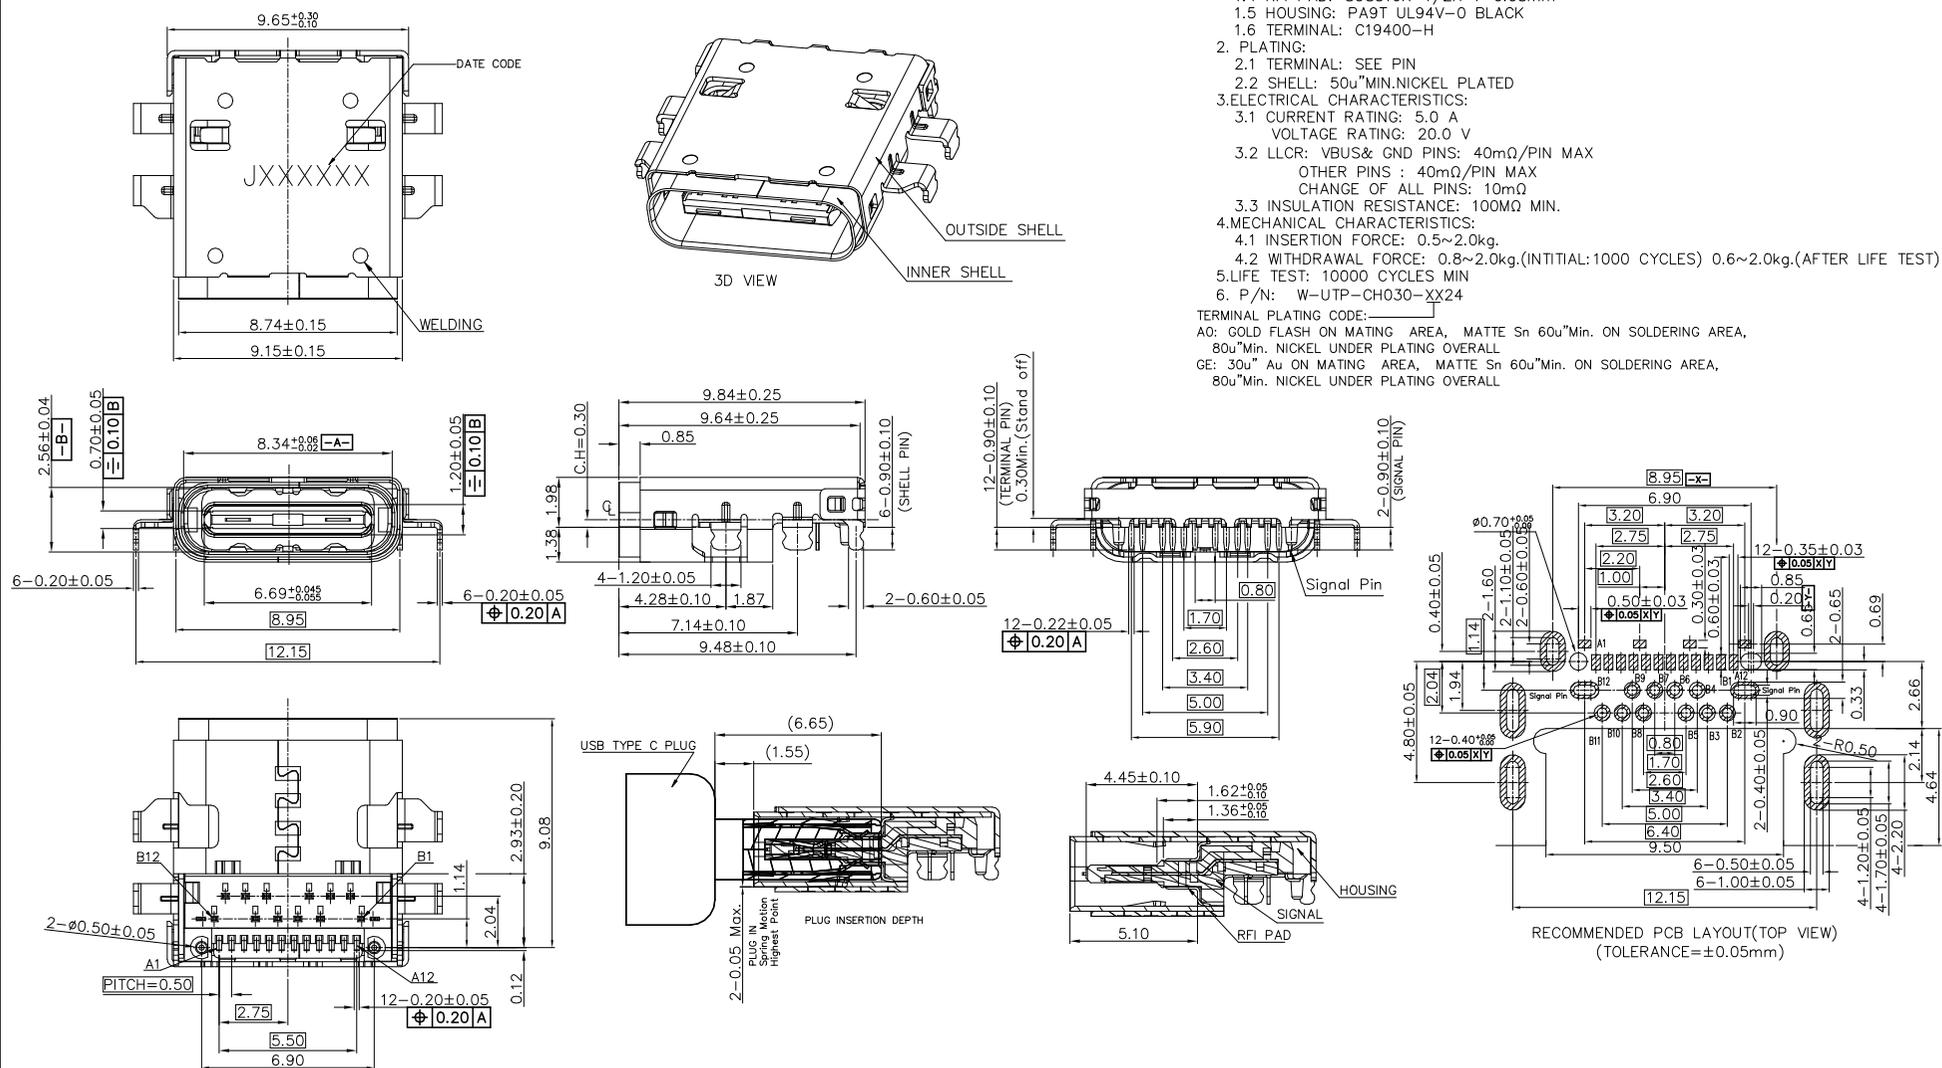

				一般公差GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS		
				X.X ±0.30	X* ±2*	校对 CHK.		W-UTP-CH030-A024	ENDPT01			
				X.XX ±0.20	X.X* ±1*	审核 CHK.		品名TITLE		比例SCALE	SHEET	版次REV.
A0	19.03.12	新图面发行	李兴泽	X.XXX ±0.10	▲MAJOR DIM.	核准 CHK.		USB TYPE C 24PIN 沉板式 CH=0.30		1/1	1/1	A0
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	mm	核准 APPD.						