



截面 A-A

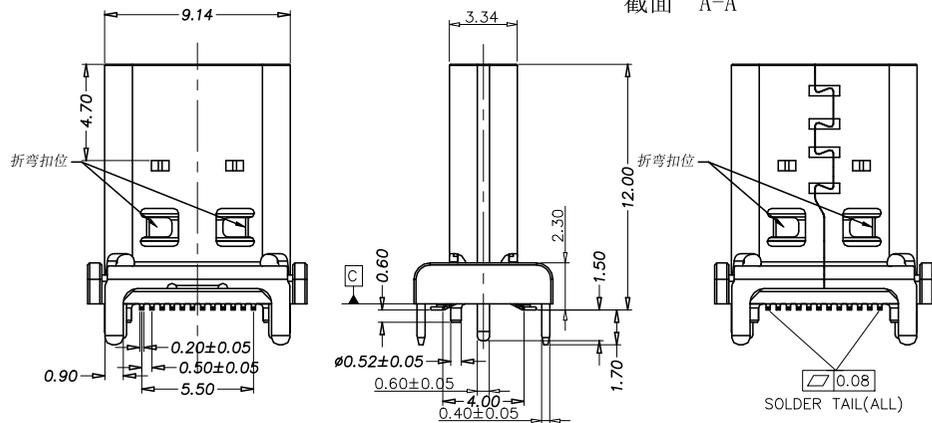


SOLDER TAIL(ALL)




NOTES:

- 1.ELECTRICAL CHARACTERISTICS:
 - 1-1.CURRENT RATING: VBUS AND GND CONTACTS RATED AT 1. PARALLELED FOR A TOTAL OF 5A;;
 - 1-2.INITIAL CONTACT RESISTANCE: 40mΩ Max.;
 - 1-3.INSULATION RESISTANCE:100MΩ Min. AT 500V DC
 - 1-4.DIELECTRIC WITHSTANDING VOLTAGE:100V AC ONE MINUTE
- 2.MECHANICAL CHARACTERISTICS:
 - 2-1.MATING FORCE: 5~20N;
 - 2-2.UNMATING FORCE: 8~20N(INITIAL),6~20N(AFTER 1000CYCL
 - 2-3.FREQUENCY: 200±50 CYCLES/HOUR,10000 CYCLES;
- 3.ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55℃ TO +85℃;

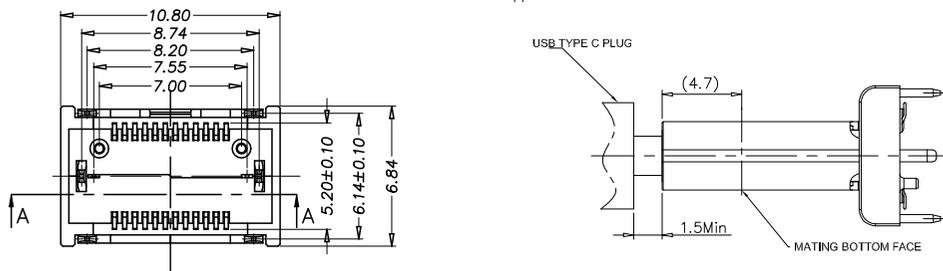


NO.	PART NAME	MATERIAL	FINISH	Q'TY
6	EMI-SHELL	STAINLESS STEEL	NO PLATING	1
5	MID-PLATE	STAINLESS STEEL	50u" Ni Min PLATING	1
4	SHELL	STAINLESS STEEL	50u" Ni Min PLATING	1
3	CONTACT	COPPER ALLOY	Au 5u"	24
2	1/Molding	THERMOPLASTIC PLASTIC	BLACK,UL 94V-0	2
1	3/Molding	THERMOPLASTIC PLASTIC	BLACK,UL 94V-0	1


				一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER				
				X.X ±0.35	X° ±6°	审核 CHK.		W-UTP-CH1200-K03		ENDPW03				
				X.XX ±0.25	X.X° ±3°	核准 APPD.		品名 TITLE				比例 SCALE	SHEET	版次 REV.
				X.XXX ±0.15	▲ MAJOR DIM.	USB TYPE C FEMALE, VERTICAL TYPE H12.00mm				1:1	1/1			
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT			BLACK, ROHS						

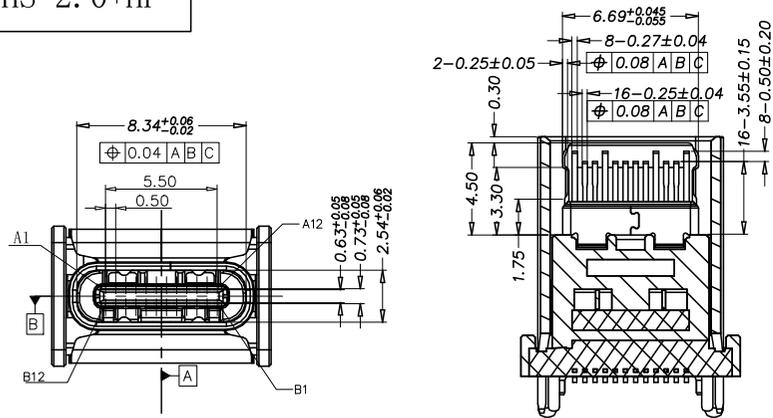

截面 A-A

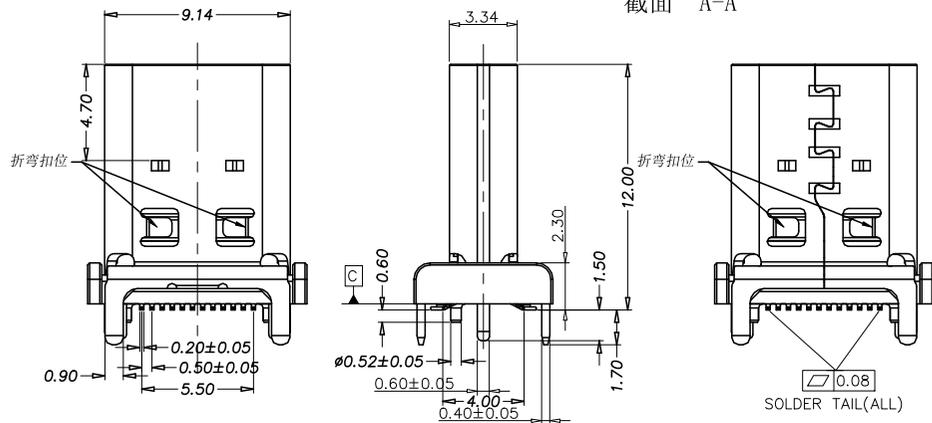


SOLDER TAIL(ALL)



NOTES:

- 1.ELECTRICAL CHARACTERISTICS:
 - 1-1.CURRENT RATING: VBUS AND GND CONTACTS RATED AT 1. PARALLELED FOR A TOTAL OF 5A;;
 - 1-2.INITIAL CONTACT RESISTANCE: 40mΩ Max;;
 - 1-3.INSULATION RESISTANCE:100MΩ Min. AT 500V DC
 - 1-4.DIELECTRIC WITHSTANDING VOLTAGE:100V AC ONE MINUTE
- 2.MECHANICAL CHARACTERISTICS:
 - 2-1.MATING FORCE: 5~20N;
 - 2-2.UNMATING FORCE: 8~20N(INITIAL),6~20N(AFTER 1000CYCL
 - 2-3.FREQUENCE: 200±50 CYCLES/HOUR,10000 CYCLES;
- 3.ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55℃ TO +85℃;

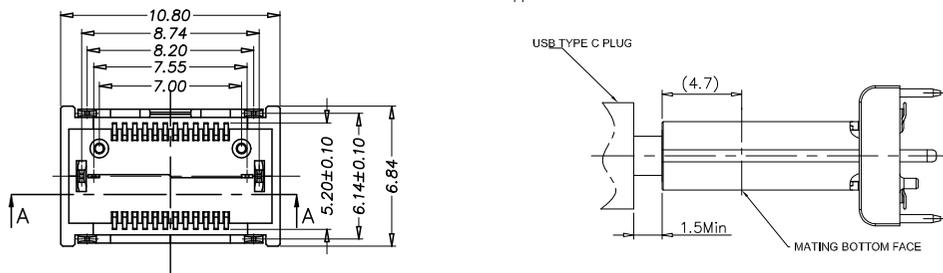

NO.	PART NAME	MATERIAL	FINISH	Q'TY
6	EMI-SHELL	STAINLESS STEEL	NO PLATING	1
5	MID-PLATE	STAINLESS STEEL	50u" Ni Min PLATING	1
4	SHELL	STAINLESS STEEL	50u" Ni Min PLATING	1
3	CONTACT	COPPER ALLOY	Au 5u"	24
2	1/Molding	THERMOPLASTIC PLASTIC	BLACK,UL 94V-0	2
1	3/Molding	THERMOPLASTIC PLASTIC	BLACK,UL 94V-0	1

				一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER			
				X.X ±0.35	X° ±6°	审核 CHK.		W-UTP-CH1200-K03		ENDPW03			
				X.XX ±0.25	X.X° ±3°			核准 APPD.		品名 TITLE			
				X.XXX ±0.15	▲ MAJOR DIM.	USB TYPE C FEMALE, VERTICAL TYPE H12.00mm							
				单位 UNIT			BLACK, ROHS				比例 SCALE	SHEET	版次 REV.
				mm			1:1				1/1	A0	

A0	19.09.24	新版发行	李兴涛	杨章雄
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.