

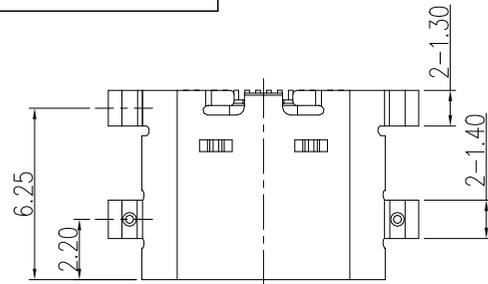

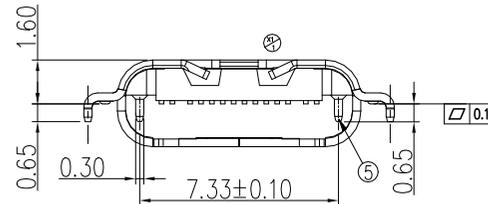



RoHS 2.0+HF

检验规范


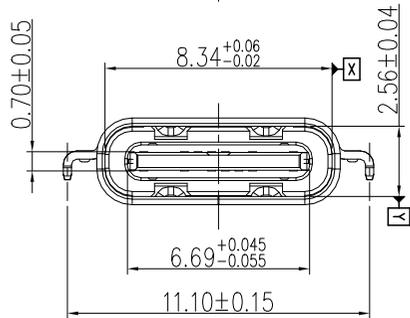


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



NOTES:

- MATERIAL: SEE "TABLE 1";
- FINISH: SEE "TABLE 1";
- ELECTRICAL:
 - CURRENT RATING: 5A(VBUS PIN 1.5A/PIN), 5A(GND PIN 1.25A/PIN MAX), 0.25A/PIN(OTHER PIN);
 - INSULATION RESISTANCE : 100 MΩ MIN. AT 250VDC;
 - DIELECTRIC WITHSTANDING VOLTAGE: 100VAC MIN;
 - CONTACT RESISTANCE : INITIAL 40mΩ MAX; AFTER 50mΩ MAX;
- MECHANICAL:
 - MATING FORCE: 5~20N.;
 - UNMATING FORCE: 8~20N(INITIAL), 6~20N(AFTER 10000 CYCLES);
 - FREQUENCY: 200±50 CYCLES/HOUR, 10000 CYCLES.;
- ENVIRONMENTAL:
 - OPERATION: -40°C~+80°C.

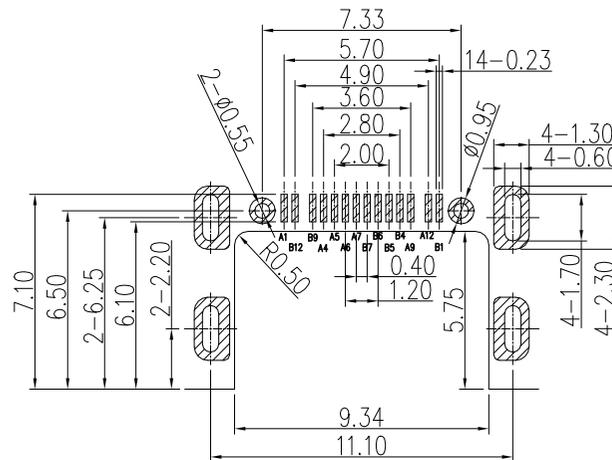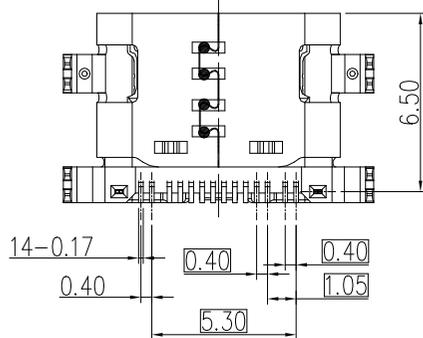

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE: ±0.05)

TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑤	MID PLATE	1	STAINLESS STEEL	Au . PLATING.	T=0.15mm
④	SHELL	1	STAINLESS STEEL	Au . PLATING.	T=0.30mm
③	TERMINAL-B	1	Copper Alloy	TABLE 2:	T=0.12mm
②	TERMINAL-A	1		Black	T=0.12mm
①	INSULATOR	1	HIGH TEMP		

一般公差 GENERAL TOLERANCE

X.X	±0.35	X°	±6°
X.XX	±0.25	X.X°	±3°
X.XXX	±0.15	▲ MAJOR DIM.	

绘图 DR.

审核 CHK.

核准 APPD.

料号 PART NO.

W-UTP-CH160-014A

文件编号 NUMBER

ENDPW03

JCTC®

品名 TITLE

TYPE-C 14PIN板上高为1.60mm

比例 SCALE
1:1

SHEET
1/1

版次 REV.
A0

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	19.05.31	新版发行	LXZ	LXZ

单位 UNIT
mm

