
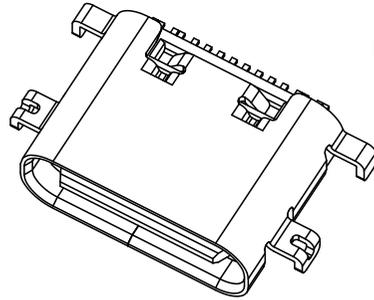


RoHS 2.0+HF





检验规范

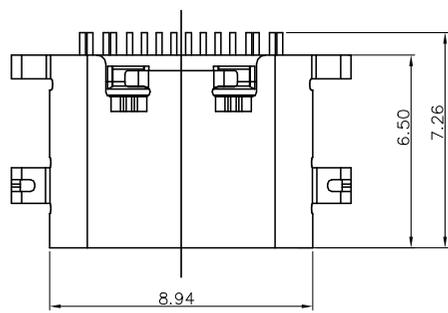

NOTES:



SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

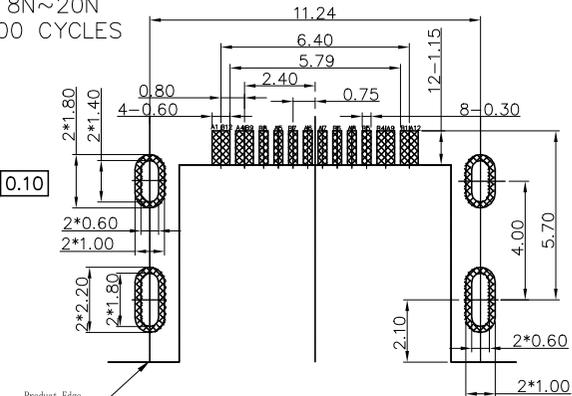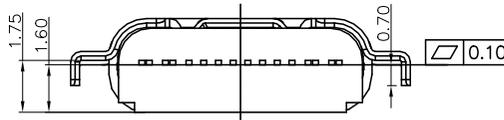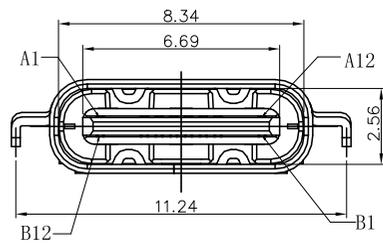

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

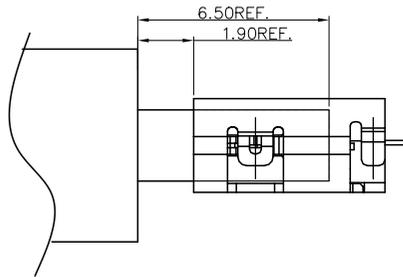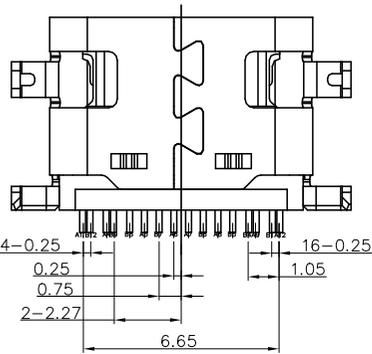

公母对插示意图

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

一般公差 GENERAL TOLERANCE					绘图 DR.	料号 PART NO.		文件编号 NUMBER		
X.X	±0.35	X°	±6°		审核 CHK.	W-UTP-CH160-016A		ENDPW03		
X.XX	±0.25	X.X°	±3°			品名TITLE				
X.XXX	±0.15	▲	MAJOR DIM.			USB C F单排16P 6.5 沉板1.6 CONN.				
A0	19.01.11	新版发行		LXZ	LXZ	核准 APPD.		比例SCALE	SHEET	版次REV.
版次REV.	日期 DATE	变更内容 DESCRIPTION		审核CHK.	核准APPD.			1:1	1/1	AO

JCTC®

比例SCALE 1:1
SHEET 1/1
版次REV. AO