

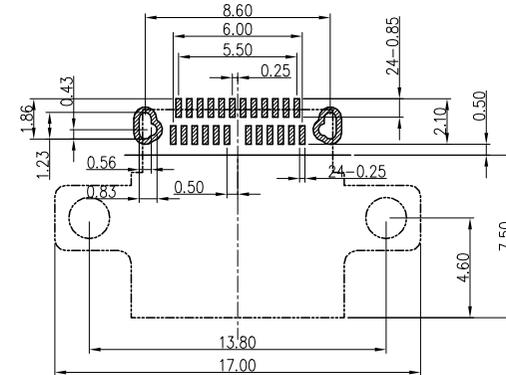
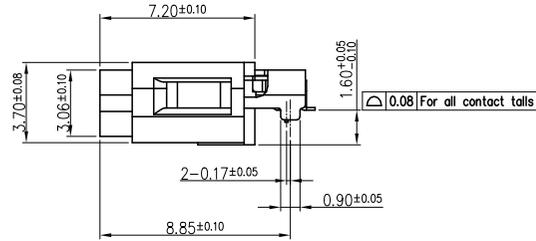
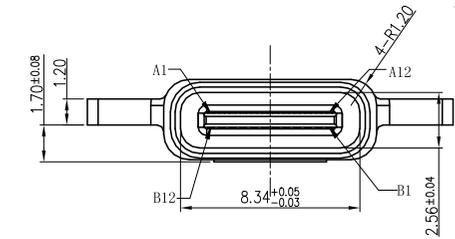


RoHS 2.0+HF


检验规范



A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

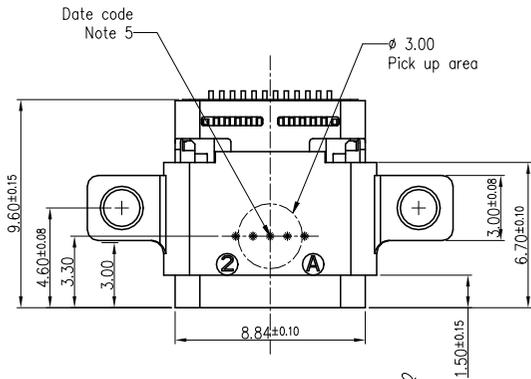

P.C.B LAYOUT

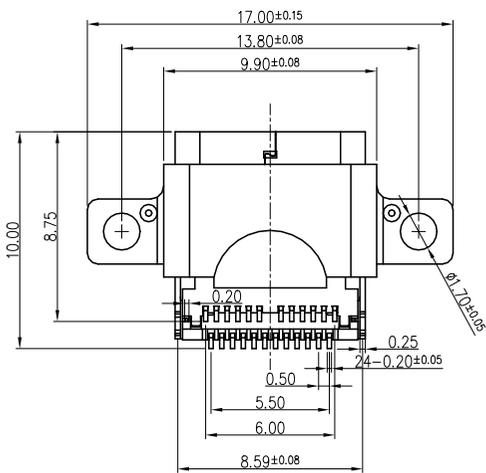

Specification:

1. Current Rating: 1.0 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 50m Max.
5. Insulator Resistance: 500M Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -20°C to +60°C

5	SHELL	STAINLESS STEEL	NI/SN Plated	1PCS
4	SPRING	STAINLESS STEEL	—	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A0		19.11.15	新版发行	LXZ	LXZ
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核CHK.	核准APPD.	

一般公差 GENERAL TOLERANCE		绘图 DR.
X.X ±0.35	X° ±6°	审核 CHK.
X.XX ±0.25	X.X° ±3°	
X.XXX ±0.15	▲ MAJOR DIM.	
单位 UNIT	mm	核准 APPD.











料号 PART NO.	文件编号 NUMBER
W-UTP-CH160-HS9	ENDPW03
品名 TITLE	
USB 3.1 CF WATERPROOF 沉板1.60mm 锁螺丝结构	

JCTC ®		
比例 SCALE	SHEET	版次 REV.
1:1	1/2	A0

RoHS 2.0+HF

检验规范

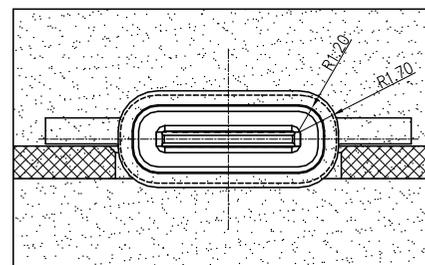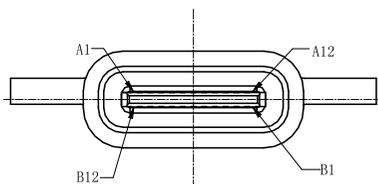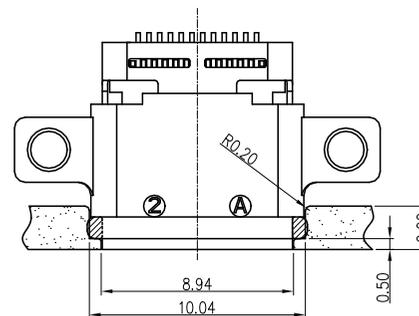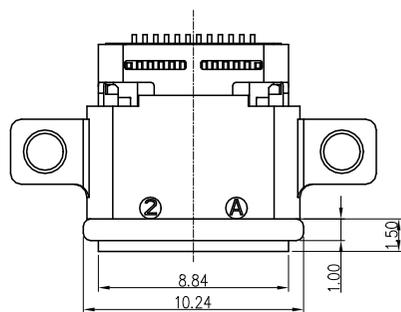

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		JCTC ®			
					X.X ±0.35	X° ±6°	审核 CHK.		W-UTP-CH160-HS9		ENDPW03					
					X.XX ±0.25	X.X° ±3°			核准 APPD.		品名 TITLE		比例 SCALE		SHEET	
					X.XXX ±0.15	▲ MAJOR DIM.	核 准 APPD.				USB 3.1 CF WATERPROOF 沉板1.60mm 锁螺丝结构		1:1		2/2	
A0	19.11.15	新版发行	LXZ	LXZ	单位 UNIT	mm							版次 REV.		A0	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.												