


环保物料



- NOTES:
- ELECTRICAL:
 - CONTACT CURRENT RATING 5.0A FOR VBUS AND GND(PINS A4 A9 B4 B9)
 - INSULATION RESISTANCE: 100 MEGAOHMS MIN. AT 250VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100VAC MIN.
 - LOW CONTACT RESISTANCE: INITIAL 40mΩMAX. AFTER 50mΩMAX.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 5N~20N.
 - EXTRACTION FORCE: 8N~20N FORM 1 TO 1000CYCLES. 6~20N FORM 1001 TO 10000CYCLES.
 - DURABILITY: 10,000 MATING CYCLES
 - OPERATING TEMPERATURE: -55°C TO +85°C
 - COPLANARITY: 0.10MAX.
 - PART NUMBER INFORMATION:









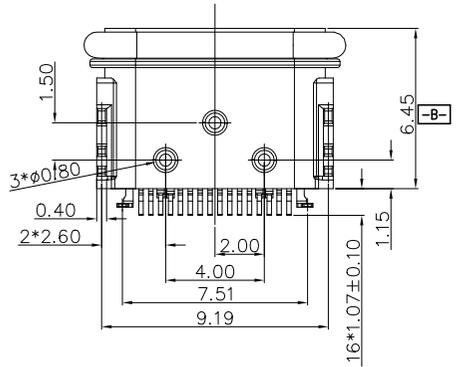


TABLE				
TEMP	PART NAME	QTY	MATERIAL	REMARK
1	SHELL	1PCS	STAINLESS	NI PLATED 50u" MIN. OVER ALL
2	INSERT HOUSING	1PCS	LCP BACK	UL94V-0
3	Mid-PLATE	1PCS	STAINLESS	NI PLATED 50u" MIN. OVER ALL
4	TOP CONTACT	1SET	COPPER ALLOY	GOLD Plated on Contact Area, Ni underplated
5	BOTTOM CONTACT	1SET	COPPER ALLOY	Ni underplated
6	RUBBER RING	1PCS	SILICA GEL	BACK


					一般公差 GENERAL TOLERANCE		绘图 DR. 李兴泽		料号 PART NO. W-UTP-CH163-F04		文件编号 NUMBER ENDPT01		 TERMINAL&CONNECTORS				
A2	21.07.15	更新图框发行	董东平	杨章雄	X.X ±0.30	X* ±2*	校对		品名 TITLE TYPE C 16P防水母座 SMT		比例 SCALE 1/1				SHEET 1/2		版次 REV. A2
A1	20.12.07	更新图面发行	董东平	杨章雄	X.XX ±0.20	X.X* ±1*	审核										
A0	19.11.04	换图框发行	李兴泽	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	核准										
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT mm			核 准 APPD.									

环保物料

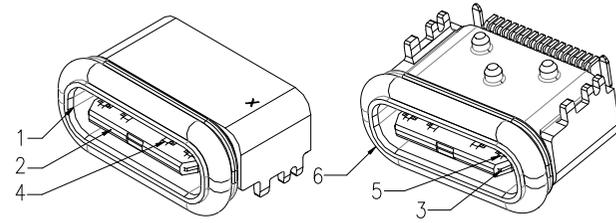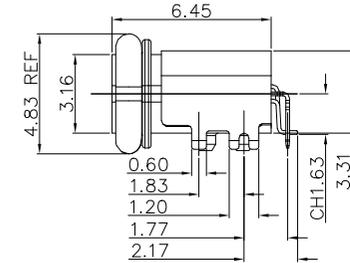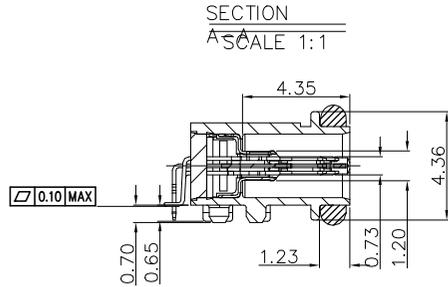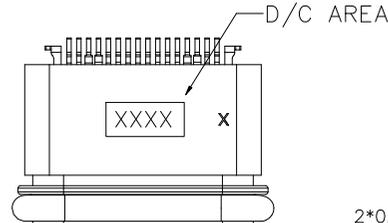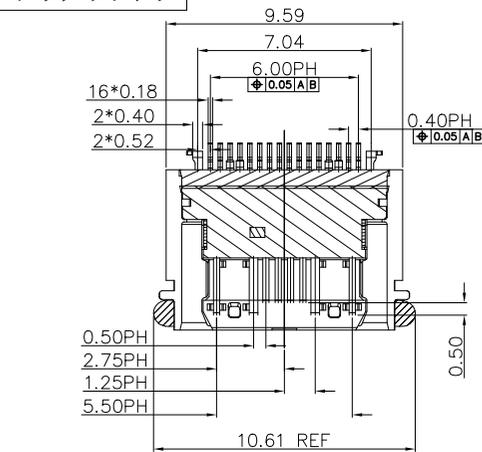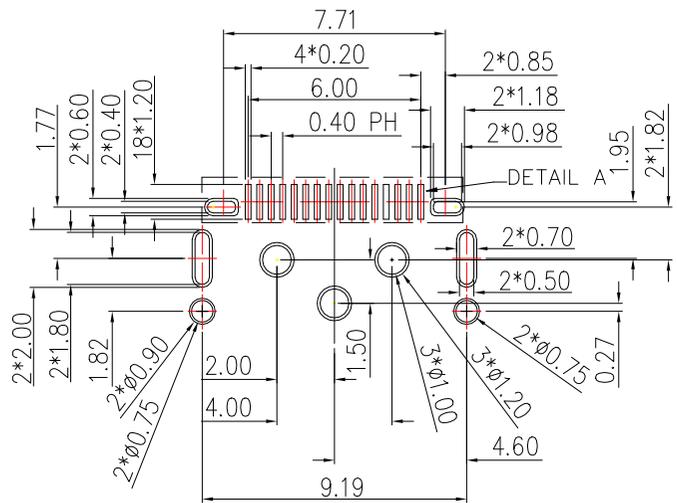


RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE ±0.05

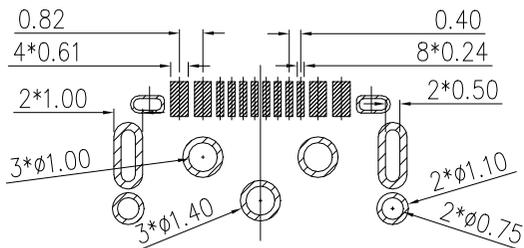

RECOMMENDED STENCIL LAYOUT

TOLERANCE±0.05

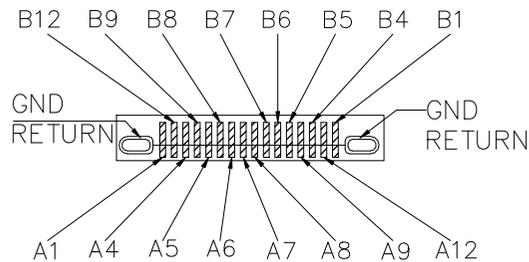


DETAIL A

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A2	/	B11	/
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	/	B3	/
A11		B2	
A12	GND	B1	GND

					一般公差GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO. W-UTP-CH163-F04	文件编号 NUMBER ENDPT01	 TERMINAL&CONNECTORS		
A2	21. 07. 15	更新图框发行	董东平	杨章雄	X.X ±0.30	X* ±2*	校对 CHK.		品名TITLE				
A1	20. 12. 07	更新图面发行	董东平	杨章雄	X.XX ±0.20	X.X* ±1*	审核 CHK.		TYPE C 16P防水母座 SMT		比例SCALE	SHEET	版次REV.
A0	19. 11. 04	换图框发行	李兴泽	杨章雄	X.XXX ±0.10	▲MAJOR DIM.	核准 APPD.				1/1	2/2	A2
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT mm								

环保物料

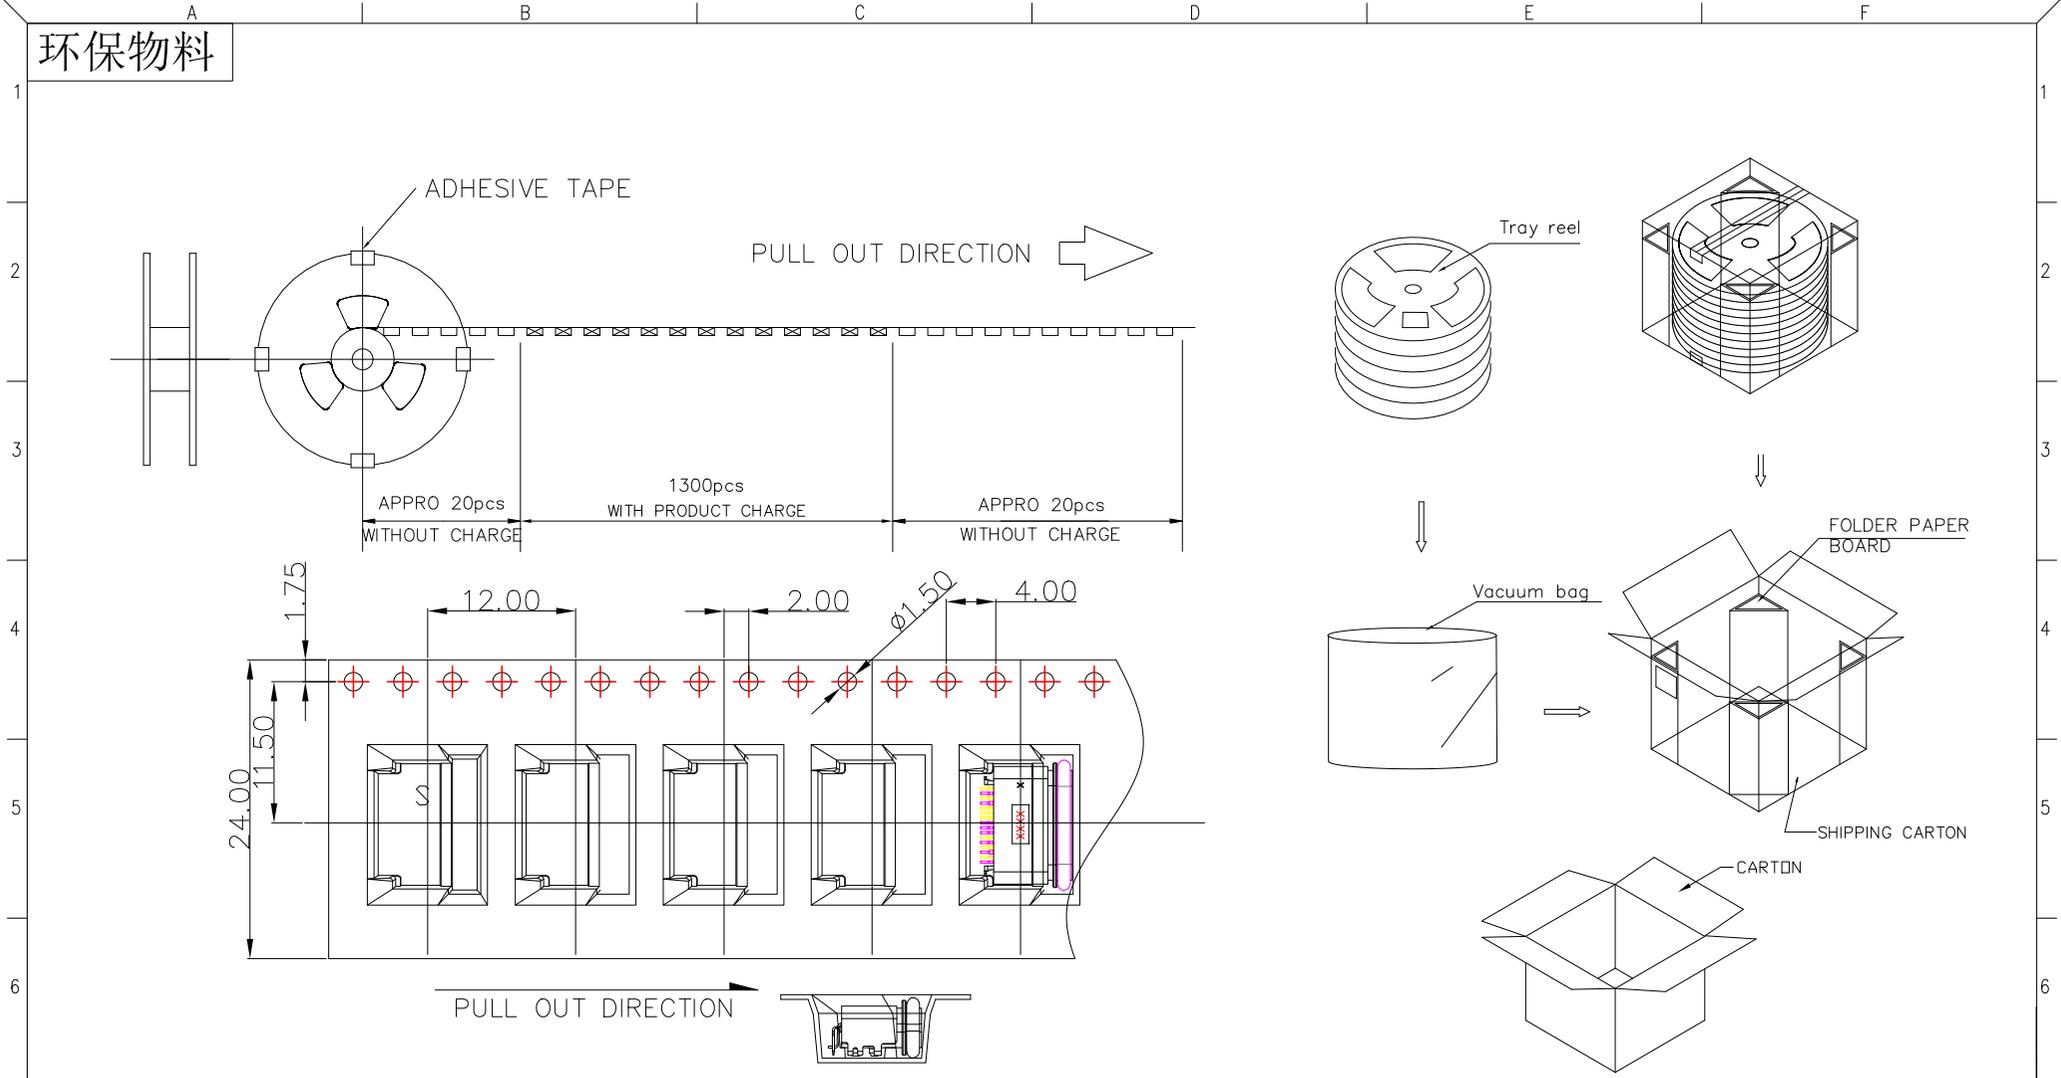

- 注:
- 1: PE袋中請放4包干燥劑;
 - 2: 前後段均留空11PCS.
 - 3: 承載帶顏色為白色

PACKING INFORMATION

QUANTITY OF PER Reel	1300PCS/Reel
QUANTITY OF PER CARTON	6*1300=7800PCS/CARTON

					一般公差GENERAL TOLERANCE	绘图DR.	李兴泽	料号 PART NO. W-UTP-CH163-F04		文件编号 NUMBER ENDPT01		 TERMINAL&CONNECTORS				
					X.X ±0.30	X' ±2'	校对CHK.	品名TITLE TYPE C 16P防水母座 SMT		比例SCALE 1/1				SHEET 1/1		版次REV. A1
					X.XX ±0.20	X.X' ±1'	审核CHK.									
					X.XXX ±0.10	▲MAJOR DIM.	核准APPD.									
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT mm											