

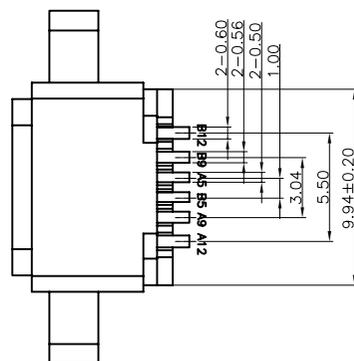


环保物料





检验规范

NOTES:
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

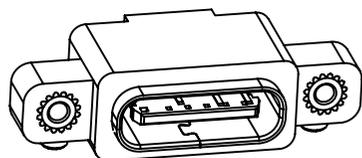

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

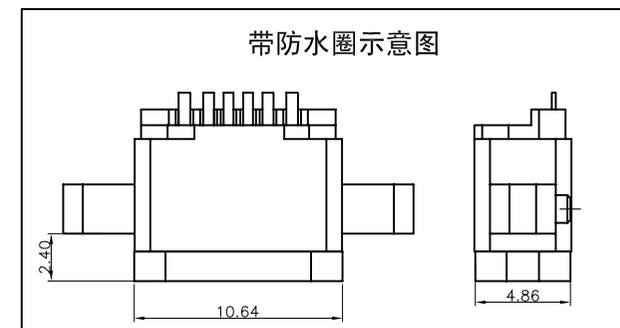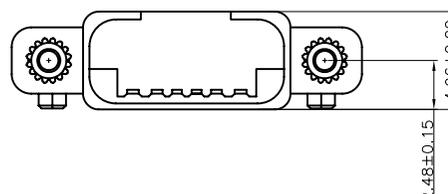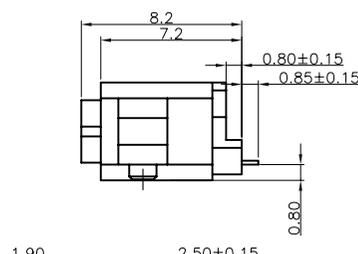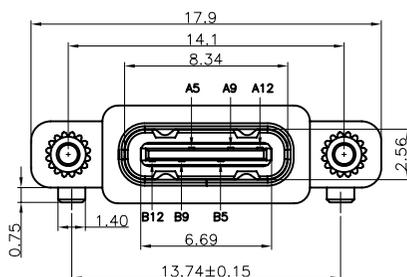


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	防水圈	硅胶	BLACK	1PCS
4	SHELL	STAINLESS STEEL	NI Plated	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

一般公差 GENERAL TOLERANCE

X.X	±0.30	X*	±2*
X.XX	±0.20	X.X*	±1*
X.XXX	±0.10	▲ MAJOR DIM.	

单位 UNIT mm



绘图 DR. 李兴泽
校对 CHK.
审核 APPD.

料号 PART NO. W-UTP-CH168-FS7

文件编号 NUMBER ENDPT01

品名 TITLE C F 单排6P一体式带螺母防水型母座

JGTC®
TERMINAL&CONNECTORS

比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0

A0	20.12.21	新图面发行	李兴泽		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	