


RoHS2.0

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

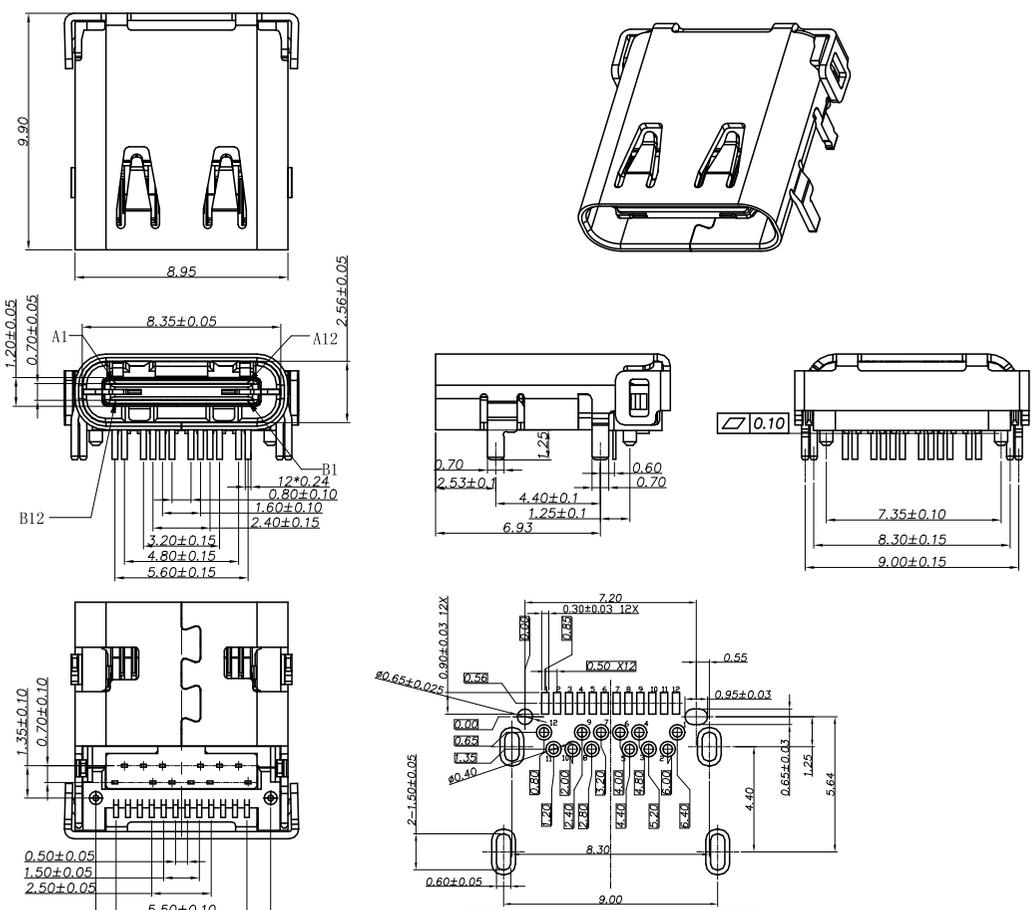

NOTES: 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT:C1814.
GOLD PLATED 1U" Min ON CONTACT AREA,
100u" Min TIN ON SOLDER AREA,
50u" NICKEL PLATING OVER ALL.
SHELL: SUS304-H,T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
SHILD:SUS301-H,T=0.20±0.03mm
2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NO	DESCRIPTION	MATERIAL	REMARKS	QTY
5	铁壳	SUS 201, T=0.30	NI Plated	1PCS
4	弹片	SUS 316, T=0.10	---	1PCS
3	中夹片	SUS 301, T=0.20	---	1PCS
2	端子	C1814, T=0.12	Au/Ni Plated	2SET
1	半成品	LCP UL94V-0	BLACK	1PCS

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
AO	NEW RELEASE	19.11.15	LINEAR	ANGLES	1:1	李兴泽	19.11.15	W-UTP-CH173-B018	ENDE05				
			0.0 ± 0.30	X. ± 0.50	APPROVED	-	-	TITLE					
			0.00 ± 0.25	X. X ± 0.20	DESIGNER	李兴泽	19.11.15	USB CF TYPE 24PIN 前插后贴					
			UNIT: MM	X. XX ± 0.10	DRAWN					REV	AO	SHEET	1/1