

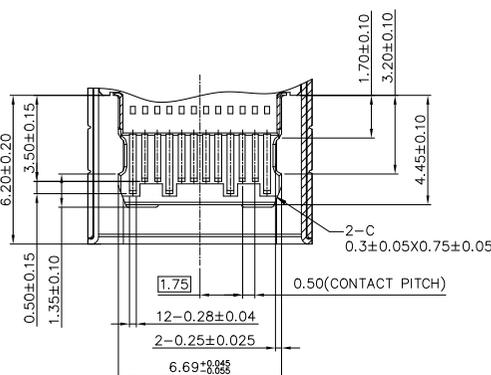


环保物料


检验规范

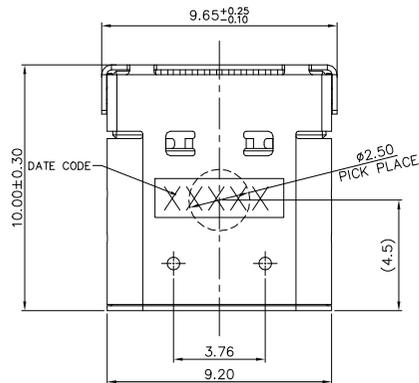

SECTION B-B


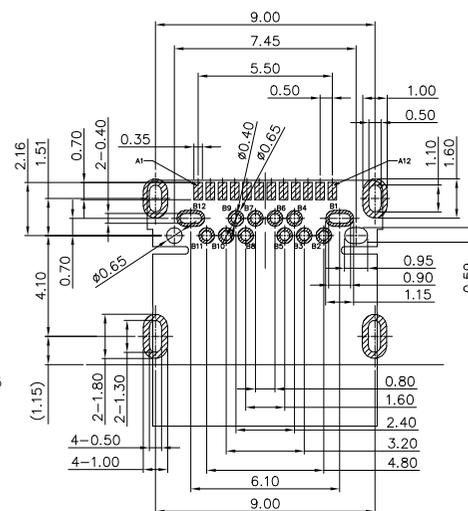


RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05
KEEP OUT AREA






NOTE:
1.MATERIAL:
1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0;Black Color
1.2 CONTACT: COPPER ALLOY(T=0.15mm)
1.3 SHELL: STAINLESS STEEL(T=0.20mm)
2.ELECTRICAL CHARACTERISTICS:
2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
2.2 CONTACT CURRENT RATING: 5A FOR VBUS PIN; 1.25A FOR VCINN PIN.
2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
2.4 INSULATION RESISTANCE 100MΩ Min
2.5 OPERATING TEMPERATURE: -40℃ ~ 85℃
3 MECHANICAL CHARACTERISTICS:
3.1 MATING FORCE: 5~20 N.
3.2 UNMATED FORCE: 8~20N AFTER TEST
3.3 DURABILITY: 10,000 CYCLES
4.PLATING
4.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50u" Min NICKEL AND 80u"Min Matte Tin ALL OVER 50u" Min NICKEL ON SOLDER AREA
4.2 SHELL: 50u" Min. NICKEL ALL OVER,
5.PART NUMBER:
W-UTP-CH175-AXX

00: G/F
05: 5u"
10: 10u"
15: 15u"
30: 30u"



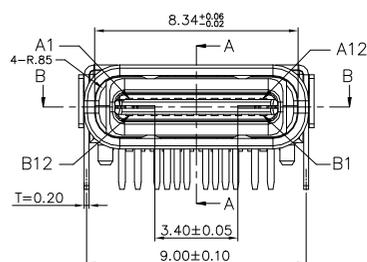


SECTION A-A

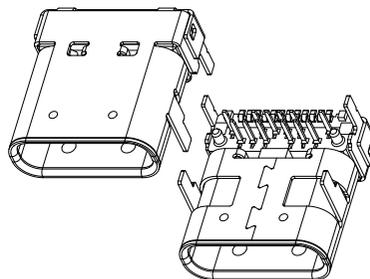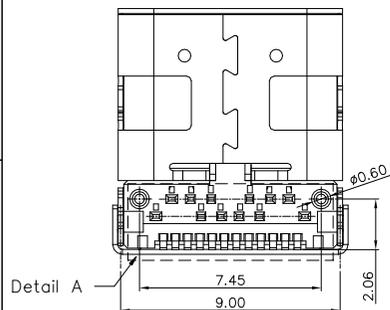


Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL		GND	SHELL		GND

A2		21.07.15	更新图框发行	董东平	杨章雄	一般公差GENERAL TOLERANCE	绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	JCTC®		
A1		21.01.26	按实物更新图面发行	董东平	杨章雄	X.X ±0.30	校对 CHK.		W-UTP-CH175-A00	ENDPW03			
A0		19.11.15	新图面发行	李兴泽	杨章雄	X.XX ±0.20	审核 CHK.		品名TITLE	USB 3.1 C TYPE FEMALE CL1.75	比例SCALE	SHEET	版次REV.
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT	X.XXX ±0.10	核准 APPD.		H3.46mm DIP TYPE		1/1	1/1	A2

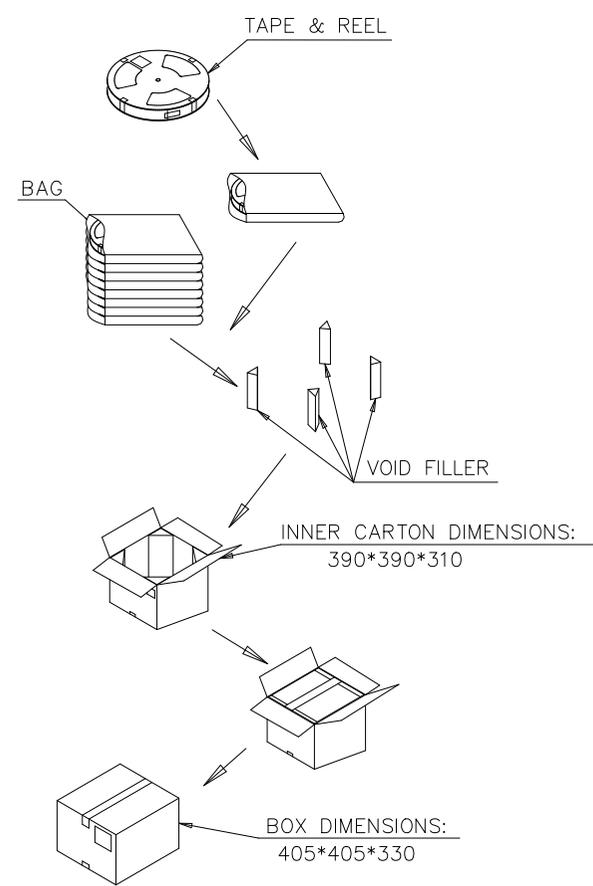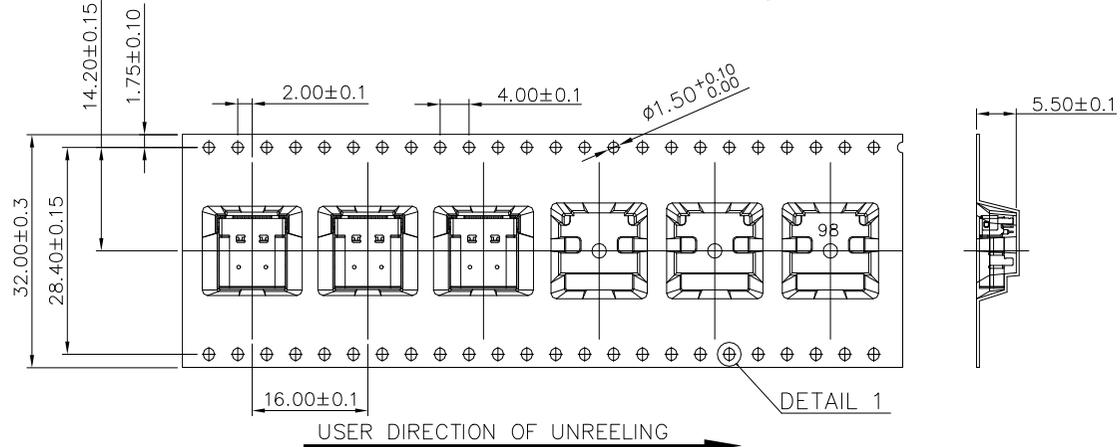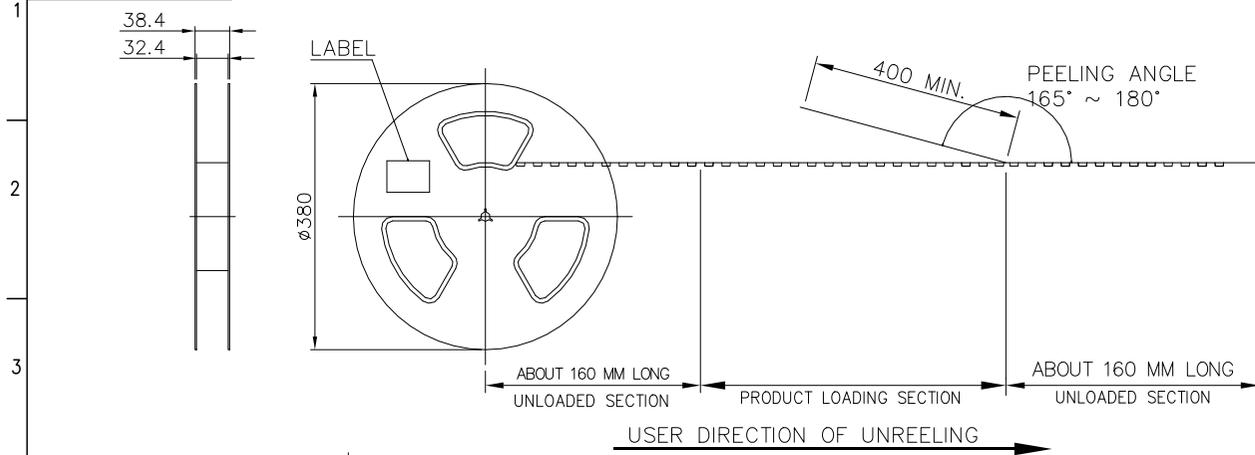

NOTE:

- MATERIAL:
 BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.



1000	8	8000 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

					一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.		文件编号 NUMBER		JCTC [®]	
A2	21.07.15	更新图框发行	董东平	杨章雄	X.X ±0.30	X° ±2°	校对		W-UTP-CH175-A00		ENDPW10			
A1	21.01.26	按实物更新图面发行	董东平	杨章雄	X.XX ±0.20	X.X° ±1°	审核		品名 TITLE		USB 3.1 C TYPE FEMALE CL1.75			
A0	19.11.15	新图面发行	李兴泽	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	核准		H3.46mm DIP TYPE		比例 SCALE	SHEET	版次 REV.	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT			核准 APPD.			1/1	1/1	A2	