

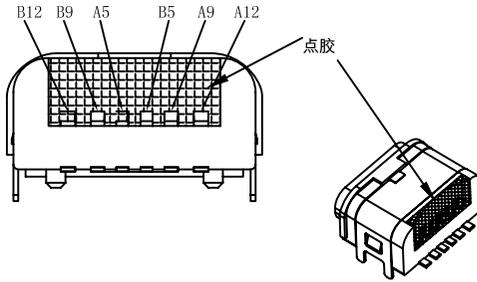
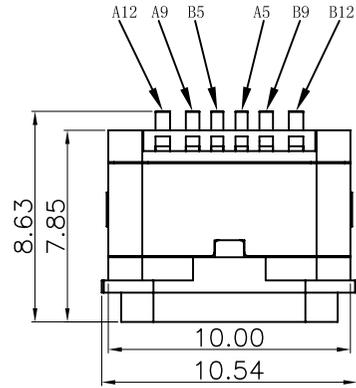
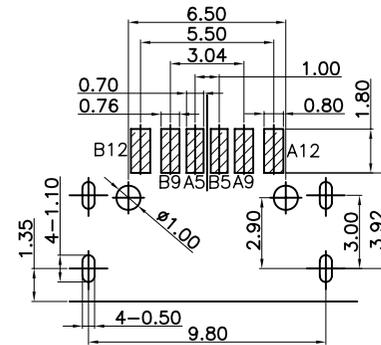
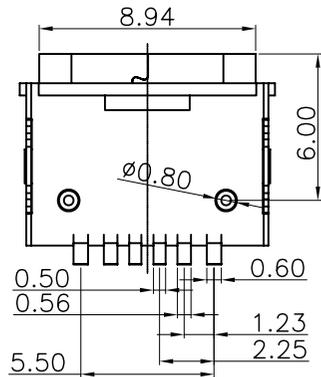


环保物料

检验规范

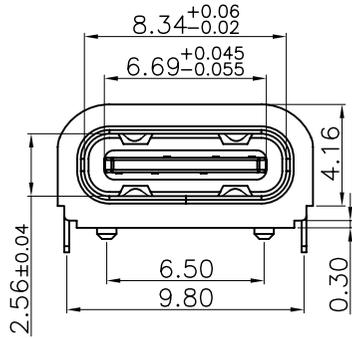

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. VOLTAGE: 100V AC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES
 9. SALT SPRAY TEST:48 HOURS.
 10. MATERIAL:
MOLDING:LCP UL94 V-0
CONTACT:C2680.
2U" MIN Au ON CONTACT AREA,50U"NI PLATING OVER ALL.80U" TIN ON SOLDER AREA,
SHELL: SUS 304
NICKEL PLATING OVER ALL.
 11. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.

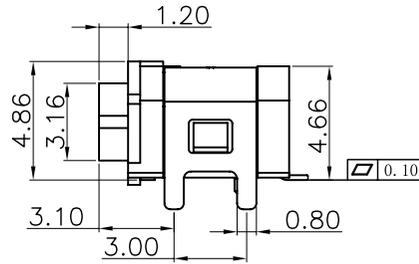

PCB LAYOUT/TOP VIEW

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

一般公差 GENERAL TOLERANCE
X.X ±0.30 X' ±2'
X.XX ±0.20 X.X' ±1'
X.XXX ±0.10 ▲ MAJOR DIM.

绘图 DR. 李兴泽
校对 CHK.
审核 CHK.
核准 APPD.

料号 PART NO. W-UTP-CH238-FS10

文件编号 NUMBER ENDPT01

品名 TITLE TYPE C 6pin防水 SMT molding2型

JCTC®
TERMINAL&CONNECTORS

A0	19.05.16	新图面发行	李兴泽
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK. 核准 APPD.

比例 SCALE 1/1	SHEET 1/1	版次 REV. A0
--------------	-----------	------------