
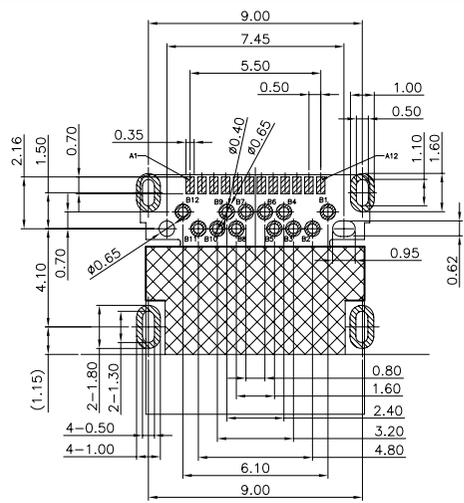
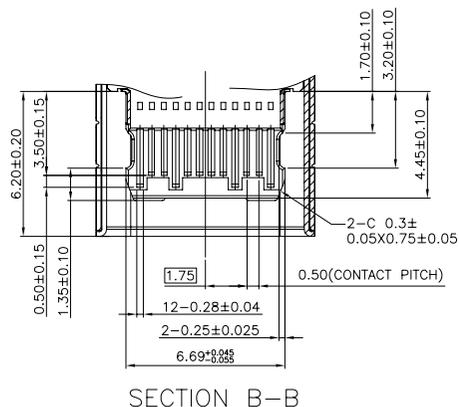


环保物料








检验规范

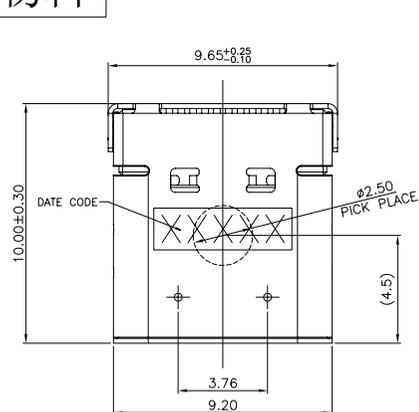

- NOTE:
- MATERIAL:
 - INSULATOR: LCP 30%GF UL 94V-0; Black Color
 - CONTACT: COPPER ALLOY(T=0.15±0.02mm)
 - SHELL: STAINLESS STEEL(T=0.20±0.02mm)
 - COVER SHELL: IRON MATERIAL(T=0.20±0.02mm)
 - INNER GROUND COVER SHELL: STAINLESS STEEL(T=0.10±0.02mm)
 - MID PLATE: STAINLESS STEEL(T=0.10±0.02mm)
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 40mΩ Max FOR INITIAL, 10mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
 - CONTACT CURRENT RATING: 5A FOR VBUS PIN; 1.25A FOR VCONN PIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - INSULATION RESISTANCE 100MΩ Min
 - OPERATING TEMPERATURE: -40°C ~ 85°C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 5~20 N.
 - UNMATED FORCE: 8~20N AFTER TEST
 - DURABILITY: 10,000 CYCLES
 - PLATING:
 - TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50u" Min NICKEL AND 80u" Min Matte Tin ALL OVER 50u" Min NICKEL ON SOLDER AREA
 - SHELL: 50u" Min. NICKEL ALL OVER,
 - COVER SHELL: 80u" Min. NICKEL ALL OVER,
 - INNER GROUND COVER SHELL: 50u" Min. NICKEL ALL OVER,
 - MID PLATE: CLEAN




RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

	PAD AREA		NO COPPER AREA
	KEEP OUT AREA		GND PATTERN ONLY

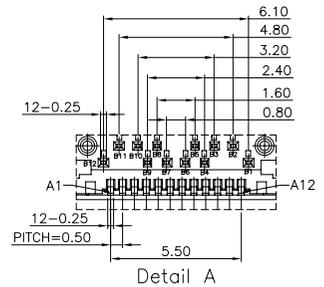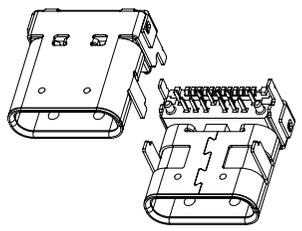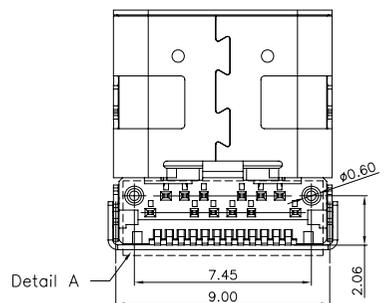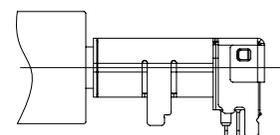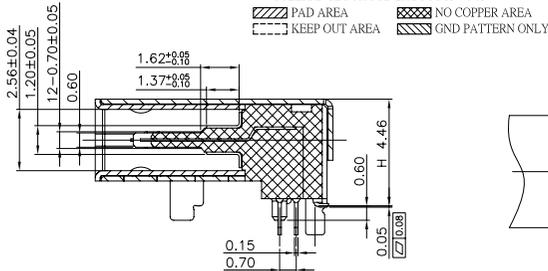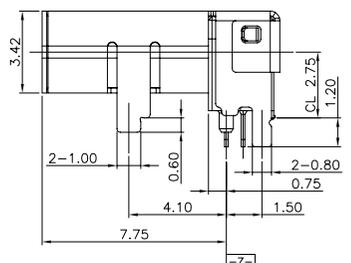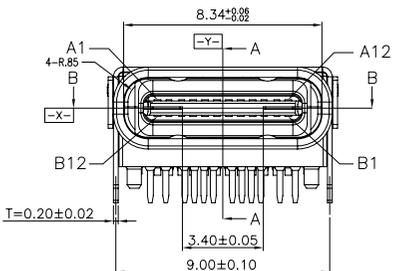


Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

A0		19.04.13	新图面发行	李兴泽	一般公差 GENERAL TOLERANCE		绘图 DR. 李兴泽	料号 PART NO. W-UTP-CH275-L24	文件编号 NUMBER ENDPT01	 TERMINAL&CONNECTORS		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT mm	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X' ±2' X.X' ±1' ▲ MAJOR DIM.	校对 CHK.	品名 TITLE USB TYPE C 24PIN CH2.75 H4.46mm DIP TYPE	比例 SCALE 1/1			

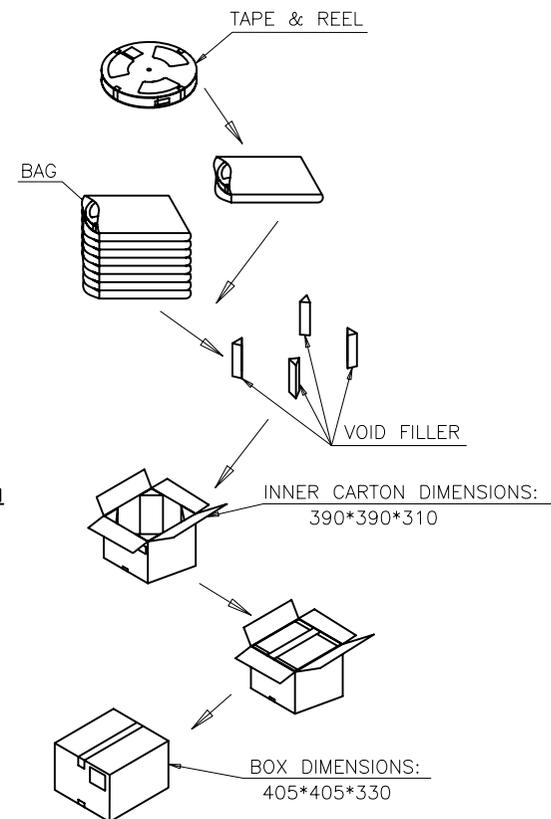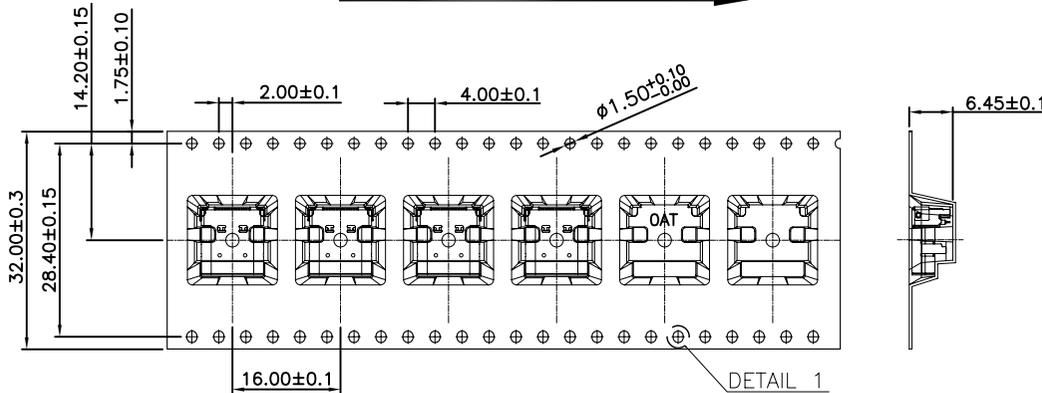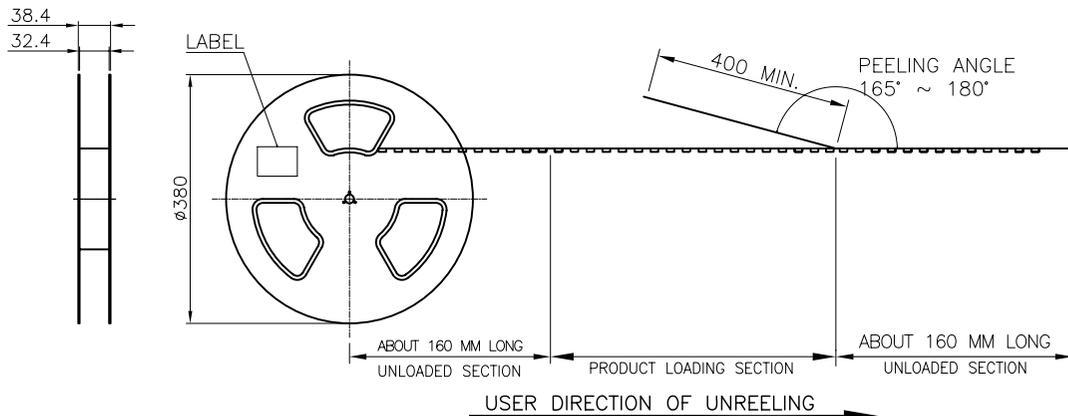

NOTE:

- MATERIAL:
 BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.



800	8	6400 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

			一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS			
			X.X ±0.30	X' ±2'	校对 CHK.		W-UTP-CH275-L24	ENDPT01				
			X.XX ±0.20	X.X' ±1'	审核 CHK.		品名 TITLE	USB TYPE C 24PIN CH2.75 H4.46mm DIP TYPE				
			X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.					比例 SCALE	SHEET	版次 REV.
A0	19.04.13	新图面发行	李兴泽	单位 UNIT	mm					1/1	1/1	A0