

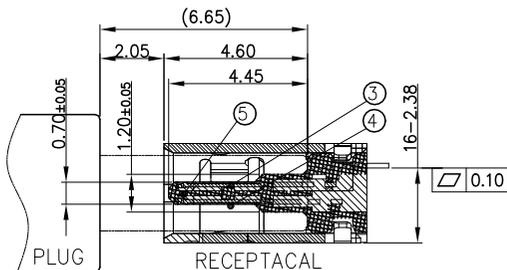
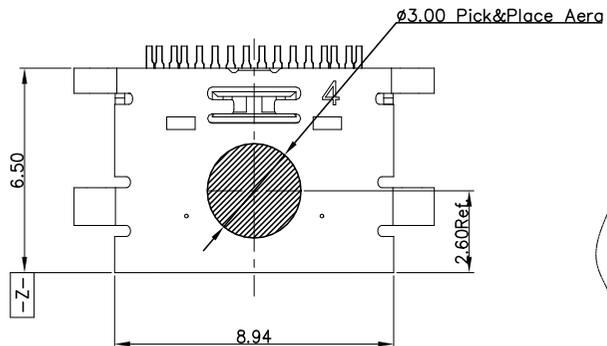
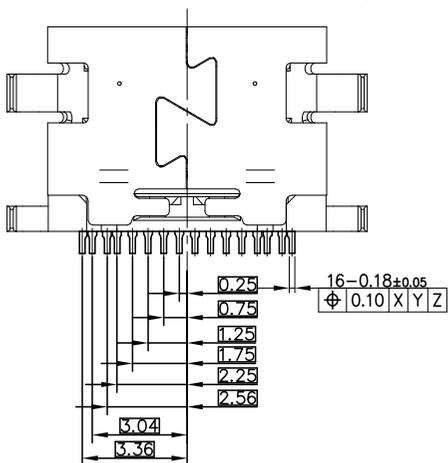


环保物料

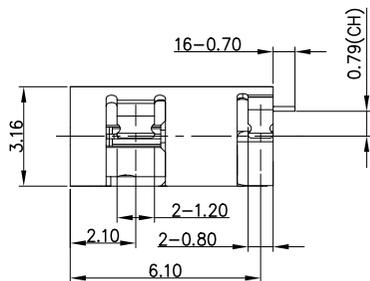

AFTER MATING
SECTION: A-A

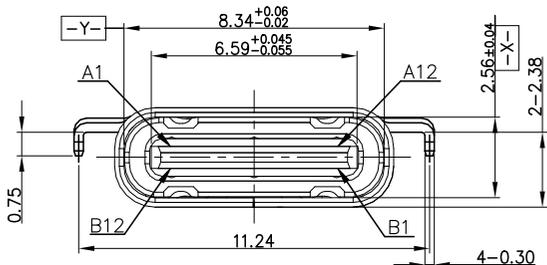

SPECIFICATION:

1.ELECTRICAL CHARACTERISTICS:


- 1.1 CURRENT RATING: 1.5A/Pin MAX(A4,A9,B4,B9)
1.25A/Pin MAX(A1,A12,B1,B2),0.25A(OTHER PIN)
- 1.2 CONTACT RESISTANCE: 40 MILLIONHM MAX.
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC r.m.s
- 1.4 INSULATION RESISTNACE: 100 MEGOHMS MIN.

2.MECHANICAL CHARACTERISTICS

- 2.1 INSERTION FORCE: 5~20N
- 2.2 EXTRACTION FORCE: Initial: 8~20N; Durability: 6~20N(1000cycles);
- 2.3 DURABILITY: 10,000CYCLES

3.ENVIRONMENTAL CHARACTERISTICS

- 3.1 TEMPERATURE RANGE: -40 °C ~ 85 °C
- 3.2. IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

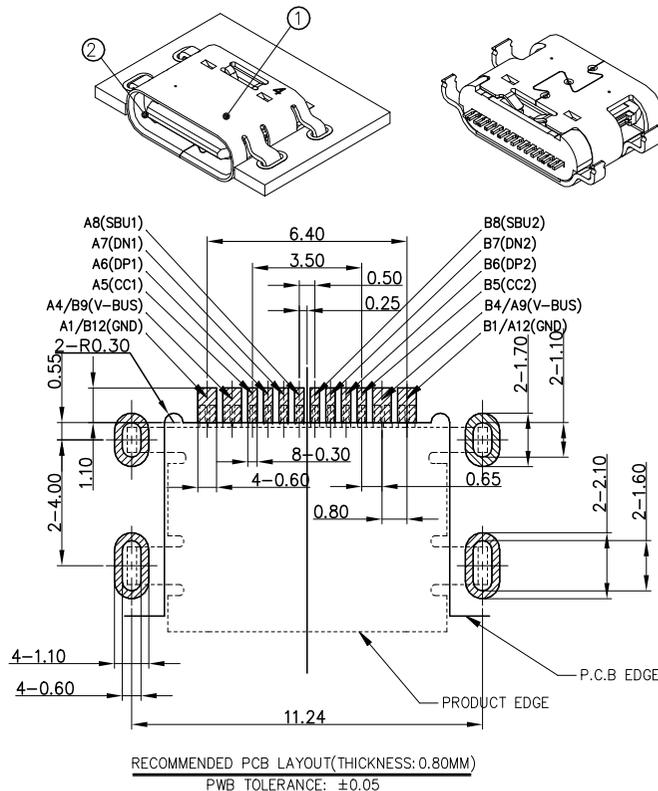





⑤	MID PLATE	1 PCS	STAINLESS STEEL	NO SURFACE TREATMENT
④	CONTACT B	1 SET	COPPER ALLOY	Ni 50u" MIN. UNDER PLATED OVER ALL. Au PLATED ON THE FUNCTIONAL AREA OF CONTACT. (GOLD PLATING THICKNESS FOLLOW THE P/N) PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
③	CONTACT A	1 SET	COPPER ALLOY	
②	HOUSING	3 PCS	NYLON 46	COLOR: BLACK
①	SHELL	1 PCS	STAINLESS STEEL	Ni 30u" MIN. UNDER PLATED OVER ALL.
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH

一般公差 GENERAL TOLERANCE					绘图 DR.
X.X	±0.30	X*	±2*	校对 CHK.	料号 PART NO. W-UTP-FH079-K16
X.XX	±0.20	X.X*	±1*	审核 CHK.	
X.XXX	±0.10	▲	MAJOR DIM.	核准 APPD.	
单位 UNIT	mm			核 准 APPD.	品名 TITLE USB TYPE C 16PIN 沉板式 CH=-0.79

文件编号 NUMBER		比例 SCALE		SHEET		版次 REV.	
ENDPW03		1/1		1/1		A1	



环保物料

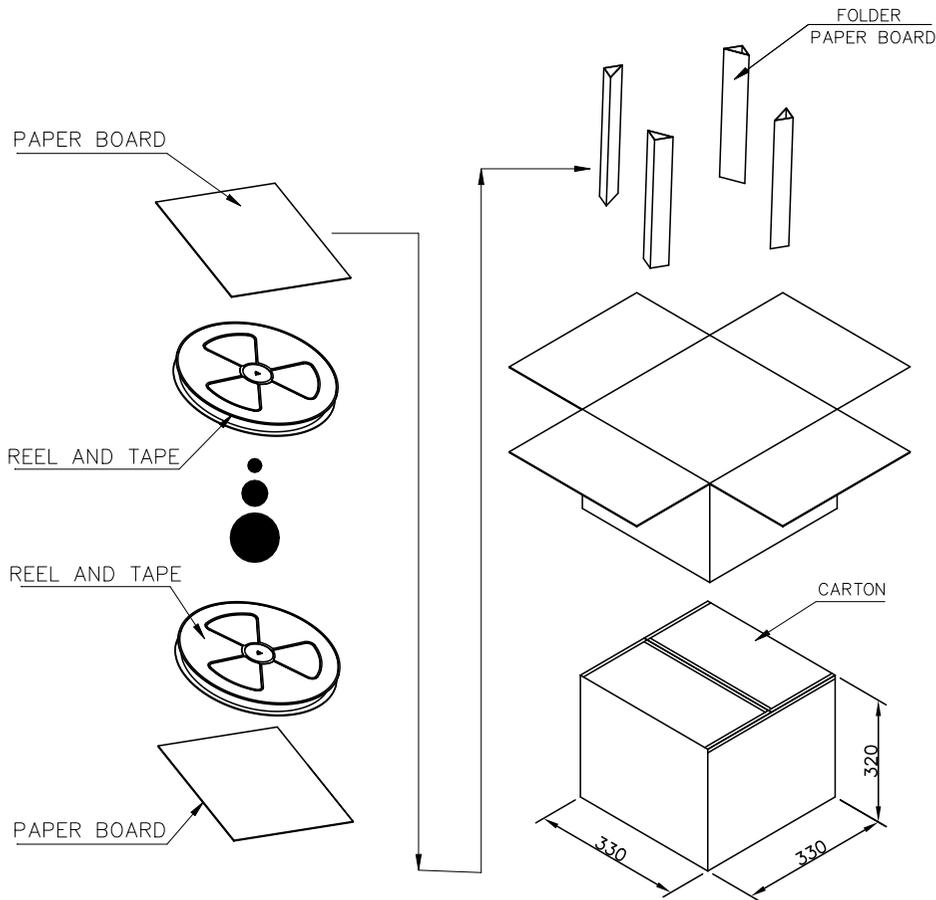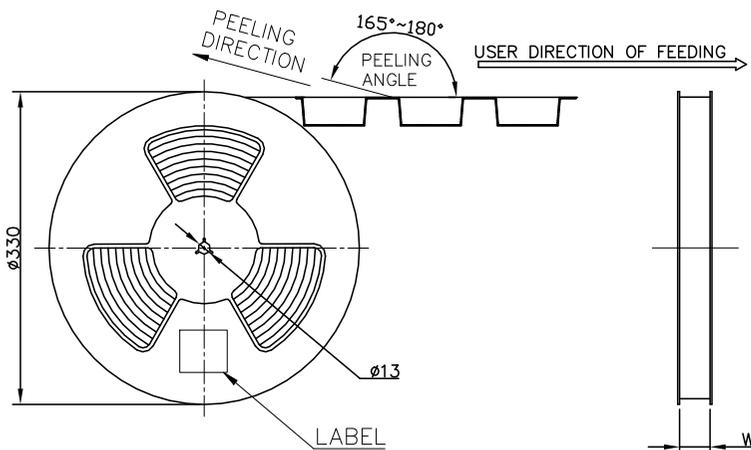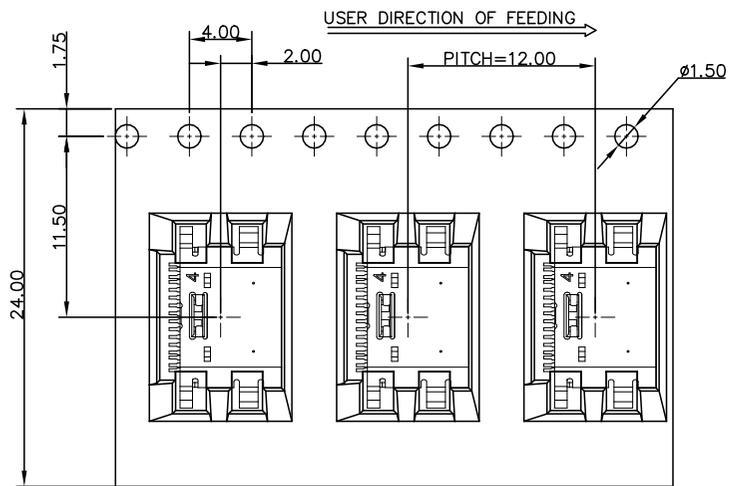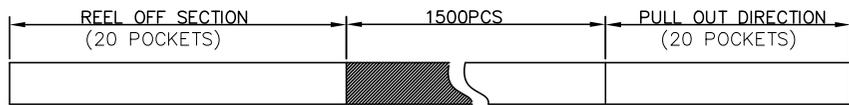

CONN. PART NO.	CONN. QTY./REEL	REEL QTY./CARTON	CONN. QTY./CARTON
W-UTP-FH079-K16	1500	10	15000 PCS

版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位UNIT	一般公差GENERAL TOLERANCE	绘图 DR.	校对 CHK.	审核 CHK.	核准 APPD.
A1	21.07.15	更新图框发行	董东平	杨章雄	mm	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	X° ±2° X.X° ±1°			
A0	19.11.15	新图面发行	李兴泽	杨章雄		▲ MAJOR DIM.				

料号 PART NO. W-UTP-FH079-K16	文件编号 NUMBER ENDPW10
品名TITLE USB TYPE C 16PIN 沉板式 CH=-0.79	

JCTC ®		
比例SCALE 1/1	SHEET 1/1	版次REV. A1