
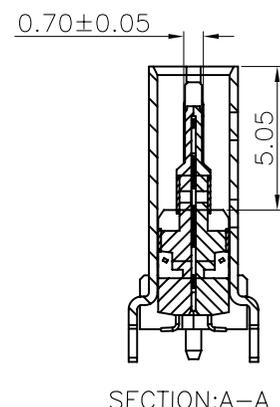
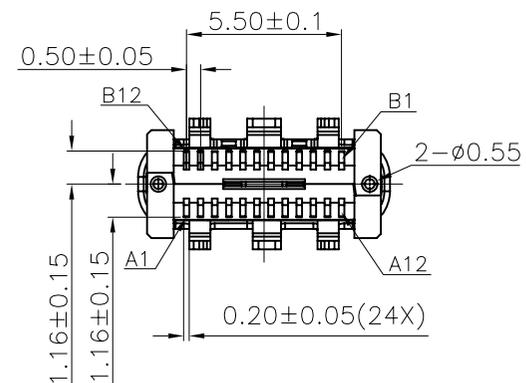
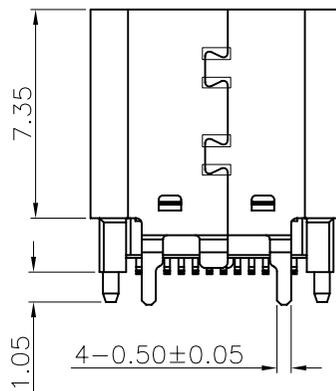
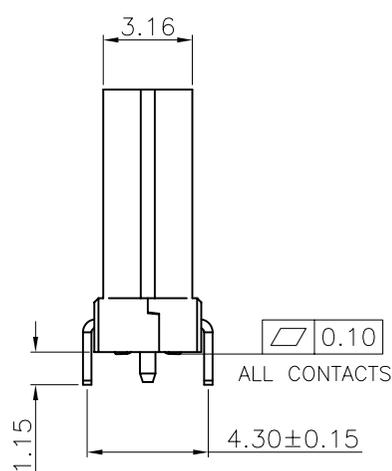
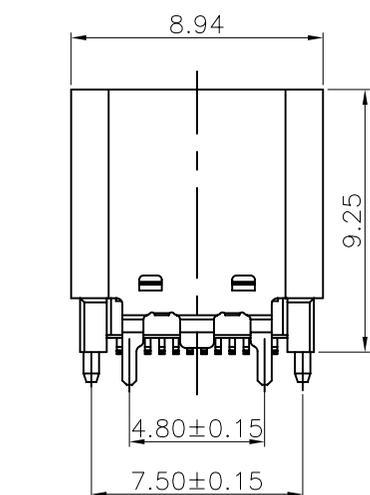
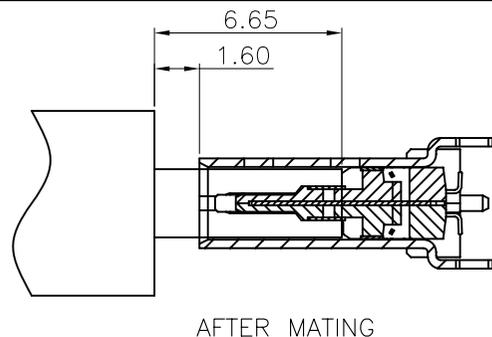


环保物料

检验规范

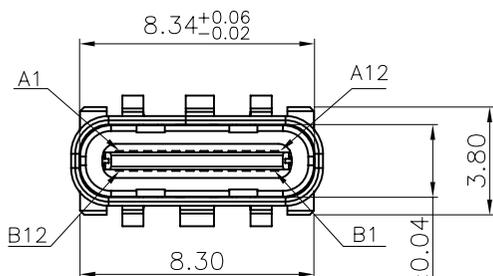

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC(LCP), UL94 V-0.
 - CONTACTS: COPPER ALLOY(C1814) T=0.12mm
 - MID PLATE: STAINLESS STEEL(SUS301) T=0.20mm
 - EMI PLATE: STAINLESS STEEL(SUS301) T=0.10mm
 - SHELL: STAINLESS STEEL(SUS304) T=0.30mm
 - PLATING SPECIFICATION:
 - CONTACTS:
 - 50u" MIN. UNDER PLATED OVER ALL.
 - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT. (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - Sn PLATING ON THE SOLDER AREA
 - FRONT SHELL & OUTER SHELL:
 - 30u" MIN. UNDER PLATED OVER ALL.
 - MID PLATE:
 - CLEAR ONLY
 - EMI PLATE:
 - CLEAR ONLY
 - MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 0.5~2.0kgf.
 - EXTRACTION FORCE: 0.8kgf~2.0kgf.
 - DURABILITY: 10000 CYCLES.
 - ELECTRICAL PERFORMANCE,
 - CURRENT RATING: 5.0A
VOLTAGE RATING: 5.0V
 - LLCR:
 - VBUS & GND PINS AND OTHER PINS: 40m?/PIN MAX.
 - SHIELD: 50m?/MAX.
 - LLCR MAX. CHANGE OF ALL PINS: 10m?.
 - INSULATION RESISTANCE: 100M? MIN
 - DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.


ALL CONTACTS

SECTION: A-A

					一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL & CONNECTORS	
					X.X ±0.30	X* ±2*	校对		W-UTP-H0925-S24	ENDPT01		
					X.XX ±0.20	X.X* ±1*	审核		品名 TITLE		比例 SCALE	张次 REV.
					X.XXX ±0.10	▲ MAJOR DIM.	核准		USB 3.1 TYPE C FEMALE VERTICAL		1/1	A0
					单位 UNIT		核准		H9.25mm SMT TYPE		1/1	A0
A0	20.03.15	新图面发行	李兴泽		mm							
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.								


环保物料

检验规范

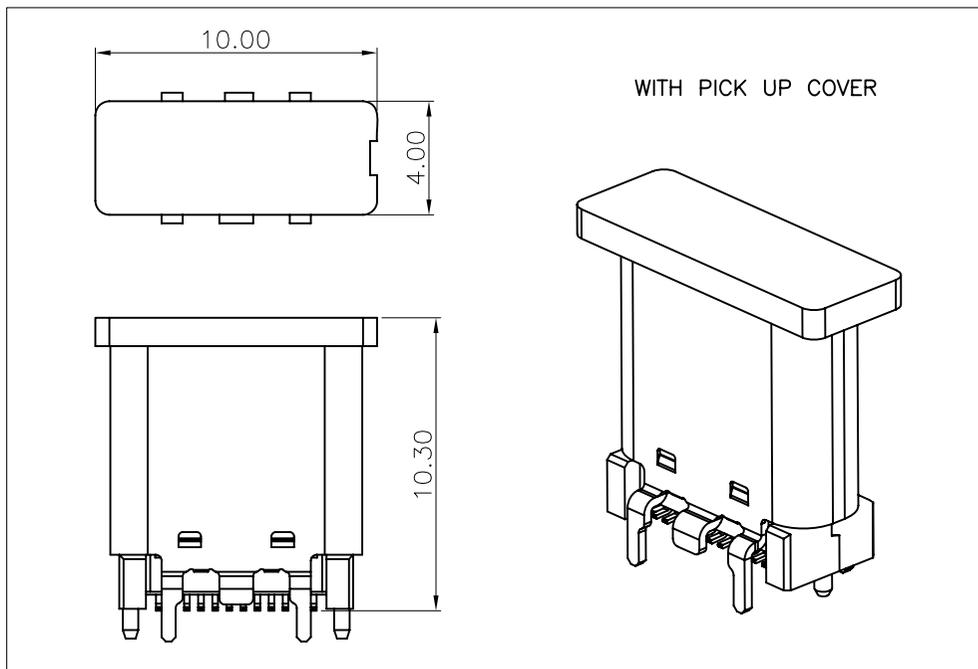

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

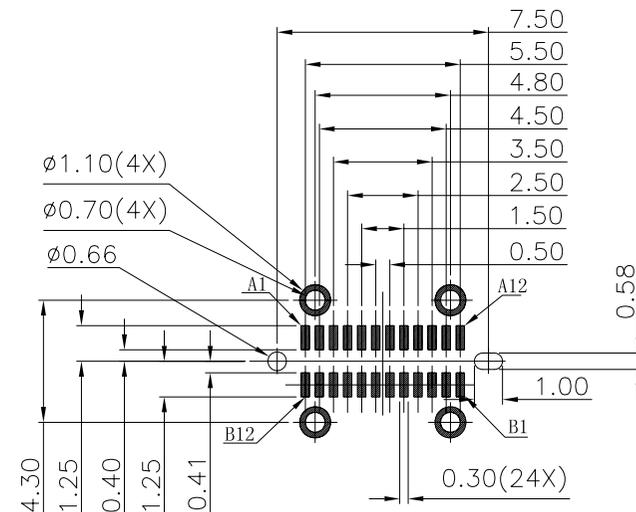

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.5 \pm 0.10MM;DEFAULT TOLERANCE: \pm 0.05






A0	20.03.15	新图面发行	李兴泽
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK. 核准 APPD.

一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽
X.X ± 0.30	X* $\pm 2^*$	校对 CHK.	
X.XX ± 0.20	X.X* $\pm 1^*$	审核 CHK.	
X.XXX ± 0.10	▲ MAJOR DIM.	核准 APPD.	
单位 UNIT			
mm			

料号 PART NO.	文件编号 NUMBER
W-UTP-H0925-S24	ENDPT01
品名 TITLE	
USB 3.1 TYPE C FEMALE VERTICAL	
H9.25mm SMT TYPE	

比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0

JGTC®
TERMINAL&CONNECTORS

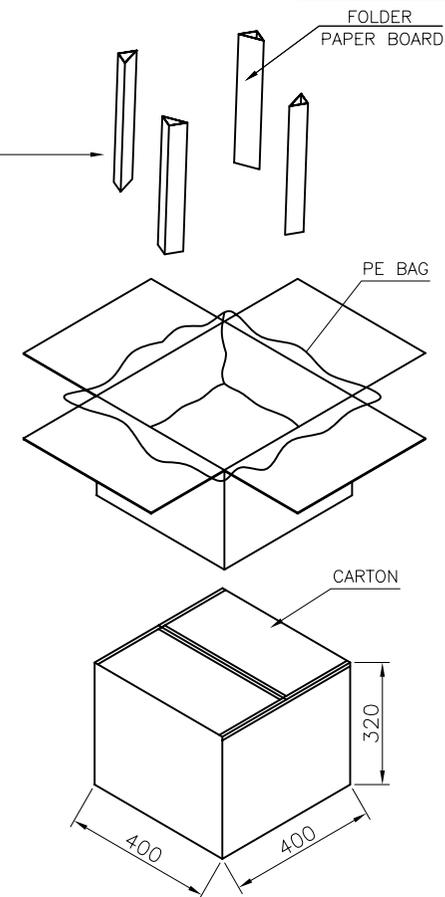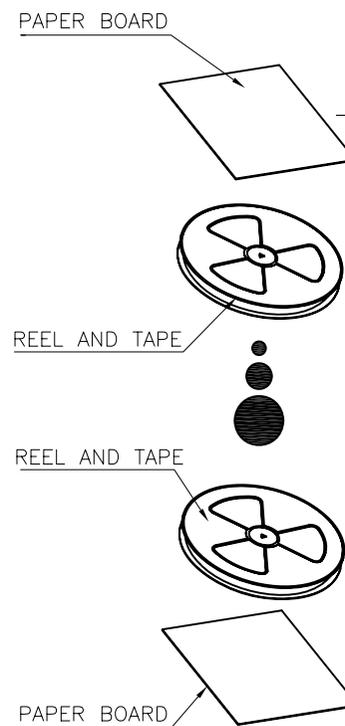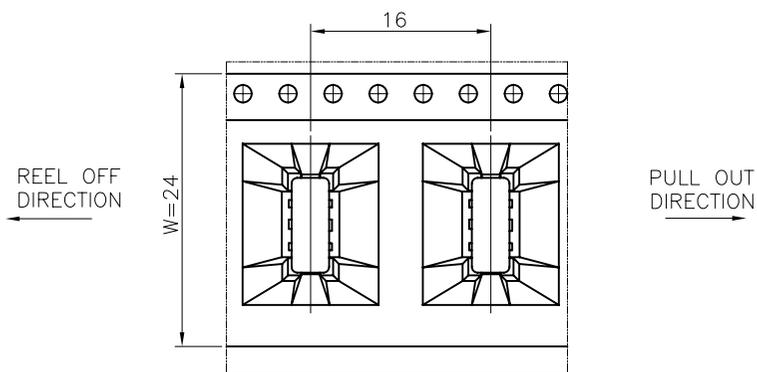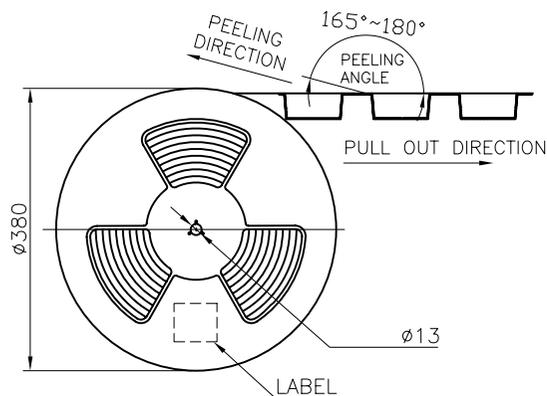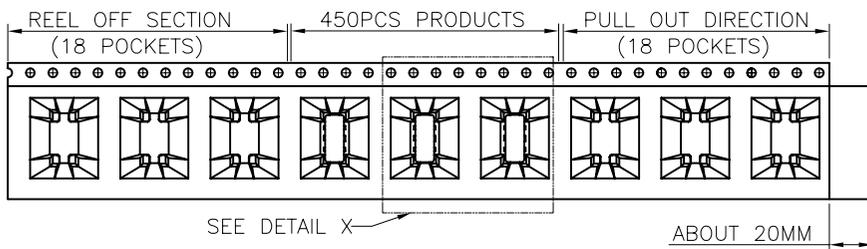


REEL	CARTON	净重 (KG)	毛重 (KG)	外箱尺寸
450	4500	3.2 kg	10.8 kg	L=400mm*W=400mm*H=320mm

一般公差 GENERAL TOLERANCE

X.X ±0.30	X* ±2°
X.XX ±0.20	X.X* ±1°
X.XXX ±0.10	▲ MAJOR DIM.

单位 UNIT mm



绘图 DR. 李兴泽
校对 CHK.
审核 APPD.

料号 PART NO. W-UTP-H0925-S24

文件编号 NUMBER ENDPT01

品名 TITLE USB 3.1 TYPE C FEMALE VERTICAL H9.25mm SMT TYPE

JGTC®
TERMINAL&CONNECTORS

比例 SCALE 1/1	SHEET 1/1	版次 REV. A0
--------------	-----------	------------

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	20.03.15	新图面发行	李兴泽	