

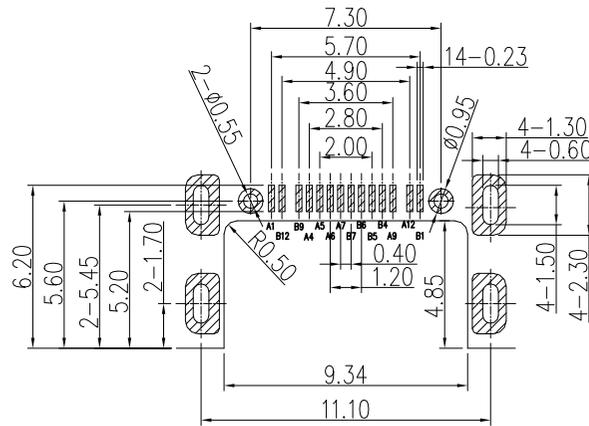
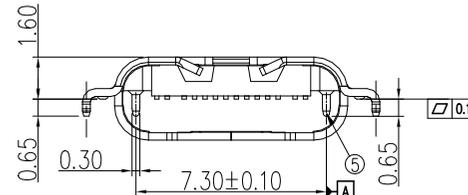



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE: ±0.05)



NOTES:

- MATERIAL: SEE "TABLE 1";
- FINISH: SEE "TABLE 1";
- ELECTRICAL:
 - CURRENT RATING: 3A;
 - INSULATION RESISTANCE :100 MΩ MIN. AT 250VDC;
 - DIELECTRIC WITHSTANDING VOLTAGE:100VAC
 - CONTACT RESISTANCE : INITIAL 40mΩ MAX; AFTER 50mΩ MAX;
- MECHANICAL:
 - MATING FORCE: 5~20N.;
 - UNMATING FORCE: 8~20N(INITIAL),6~20N(AFTER 10000 CYCLES);
 - FREQUENCE: 200±50 CYCLES/HOUR,10000 CYCLES.;
- ENVIRONMENTAL:
 - OPERATION: -40°C~+80°C.

TABLE 1:

⑤	MID PLATE	1	STAINLESS STEEL	Au . PLATING.	T=0.15mm
④	SHELL	1	STAINLESS STEEL	Au . PLATING.	T=0.30mm
③	TERMINAL-B	1	Copper Alloy	Au . PLATING.	T=0.12mm
②	TERMINAL-A	1		Au . PLATING.	T=0.12mm
①	INSULATOR	1	HIGH TEMP	Black	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK

A0	19.05.31	换图框发行	李兴泽		
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核CHK.	核准APPD.	

一般公差 GENERAL TOLERANCE				绘图 DR.	
X.X	±0.35	X°	±6°	审核 CHK.	料号 PART NO. W-UTP-H160A-011
X.XX	±0.25	X.X°	±3°		
X.XXX	±0.15	▲ MAJOR DIM.			
单位 UNIT	mm			核准 APPD.	文件编号 NUMBER ENDPW03

品名 TITLE TYPE-C 14PIN板上高为1.60mm		比例 SCALE 1:1	SHEET 1/1	版次 REV. A0
------------------------------------	--	-----------------	--------------	---------------

