




环保物料

检验规范






NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

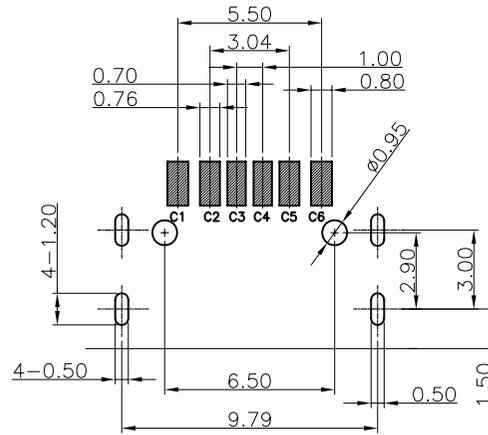

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

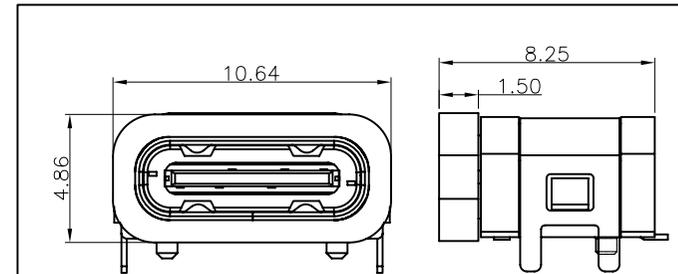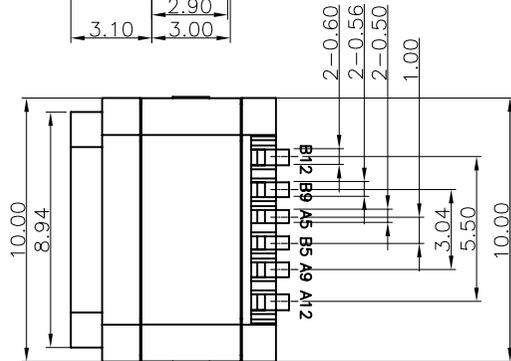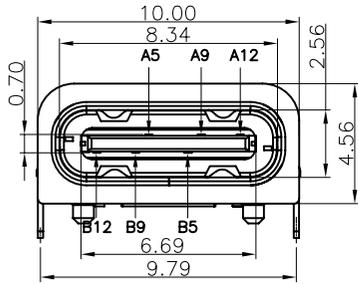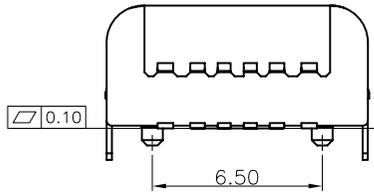

加防水圈示意图

PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	A5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	Ni Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	Ni Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/Ni Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A0	19.05.10	新图面发行	李兴泽	
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.

一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽
X.X ±0.30	X* ±2*	校对 CHK.	
X.XX ±0.20	X.X* ±1*	审核 CHK.	
X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	
单位 UNIT			
mm			

料号 PART NO.	W-UTP-H238-6AB
品名 TITLE	C F 单排6P防水板上型成品

文件编号 NUMBER	ENDPT01
-------------	---------

JCTC ®		
TERMINAL&CONNECTORS		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0