








RoHS 2.0+HF

检验规范

NOTES:

SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

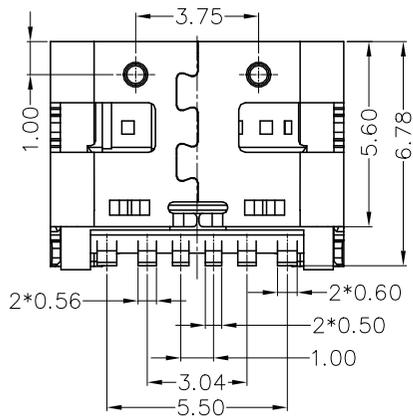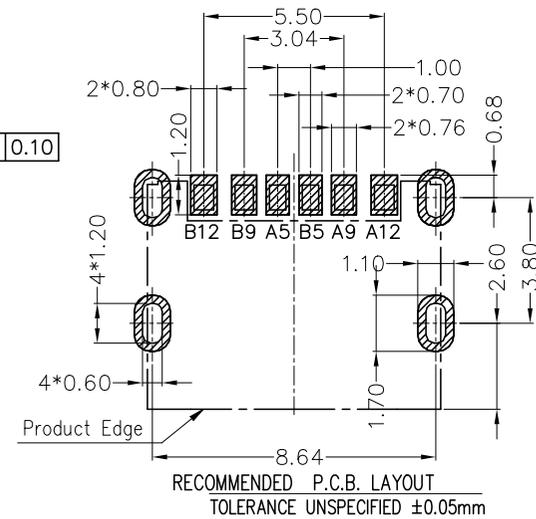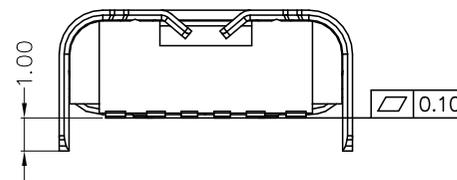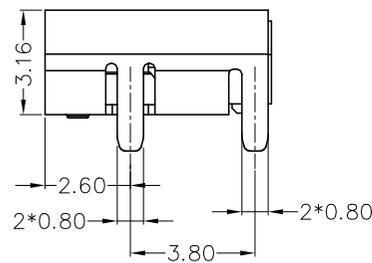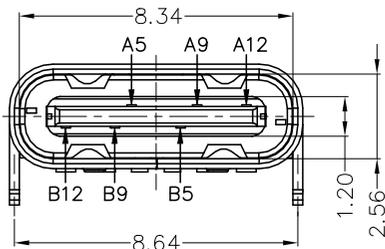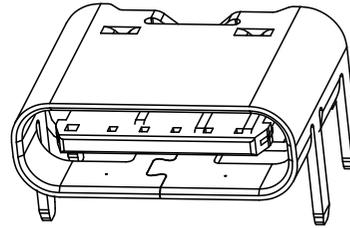


A5	CC1	B12	GND	3	SHELL	STAINLESS STEEL	Ni:50u" Plated	1SET
A9	VBUS	B9	VBUS	2	CONTACT	COPPER ALLOY	Au1u"/Ni:50u" Plated	1SET
A12	GND	B5	CC2	1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
PIN	SIGNAL NAME	PIN	SIGNAL NAME	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

一般公差 GENERAL TOLERANCE

X.X	±0.35	X°	±6°
X.XX	±0.25	X.X°	±3°
X.XXX	±0.15	▲	MAJOR DIM.

UNIT
mm



绘图
DR.

审核
CHK.

核准
APPD.

料号 PART NO.

W-UTP-H316-008

品名 TITLE

USB C F 6PIN脚长1.0 CONN

文件编号 NUMBER

ENDPW03

JCTC®

比例SCALE
1:1

SHEET
1/1

版次REV.
A0

A0	19.01.07	换图框发行	李兴泽	
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.