







环保物料

检验规范




SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:
  - 1-1. CONTACT RESISTANCE: 30mΩ MAX.
  - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
  - 1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
  - 2-1. INSERTION FORCE :0.5-2.0KgF(REF.)
  - 2-2. WITHDRAWAL FORCE :0.8-2.0KgF(REF.)
3. LIFE TEST: 10,000 CYCLES.
4. TO CONFORM TO THE KRCDNN HAZARDOUS SUBSTANCE FREE SPEC.

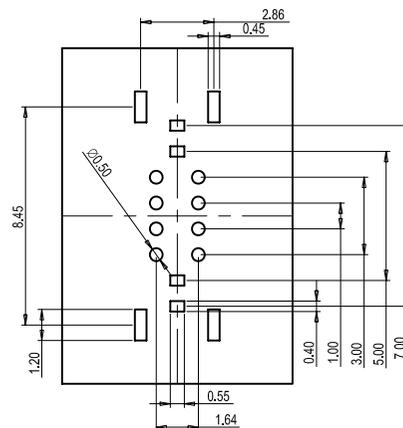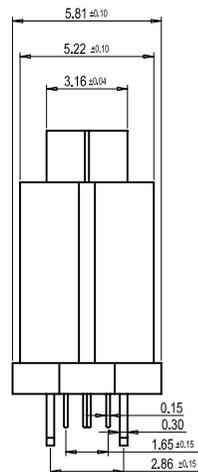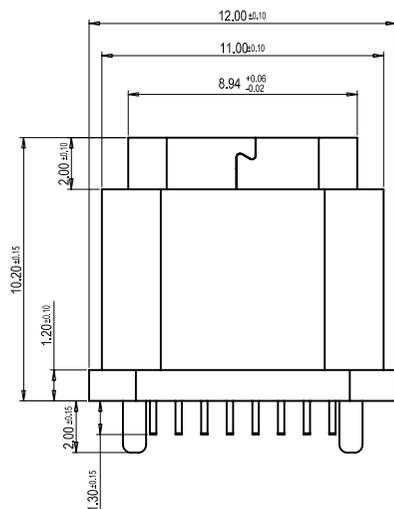

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)  
TOLERANCE UNSPECIFIED ±0.05mm



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	—	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A0		19.11.15	新图面发行	李兴泽	
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	

一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽
X.X ±0.30	X* ±2*	校对 CHK.	
X.XX ±0.20	X.X* ±1*	审核 APPD.	
X.XXX ±0.10	▲ MAJOR DIM.		
单位 UNIT			
mm			

料号 PART NO.	文件编号 NUMBER
W-UTP-L1020-FS5	ENDPT01
品名 TITLE	
TYPE C 16PIN防水	

比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0

**JGTC**®  
TERMINAL&CONNECTORS