
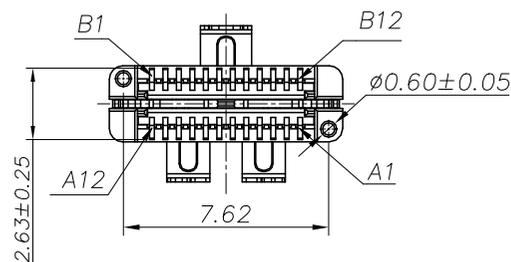
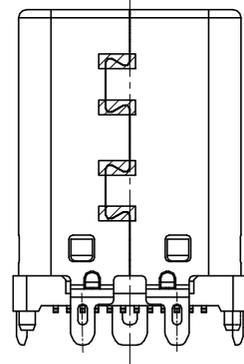
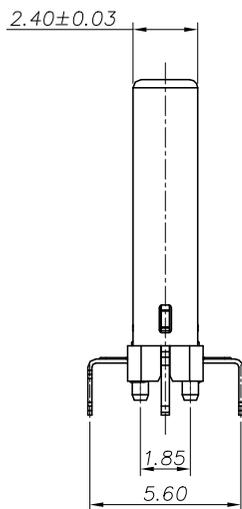
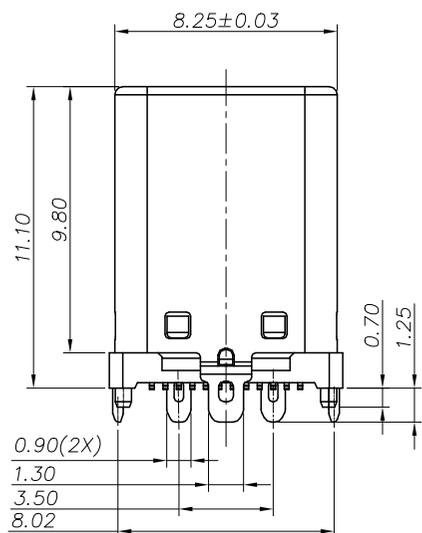
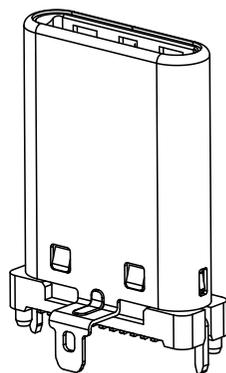


环保物料

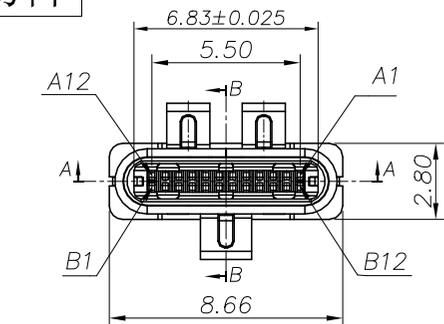


NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING&PICKUP COVER: LCP,UL94 V-0.BLACK
 - 2.CONTACTS: C7025
 - 3.LATCH: STAINLESS STEEL(SUS301)
 - 4.SPRING: STAINLESS STEEL(SUS304)
 - 5.FRONT SHELL: STAINLESS STEEL(SUS304)
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - Ni 50u" MIN. UNDER PLATED OVER ALL.
 - Au 3u" PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - Sn PLATING ON THE SOLDER AREA
 - 2-2.FRONT SHELL:
 - Ni 30u" MIN. UNDER PLATED OVER ALL.
 - 2-3.LATCH:
 - Ni 50u" MIN. UNDER PLATED OVER ALL.
 - 80u" MIN. TIN PLATED ON SOLDER AREA.
 - 2-4.SPRING:
 - CLEAR ONLY
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING: SEE TABLE 1
VOLTAGE RATING: 5.0V
 - 4-2. LLCR:
 - VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX.
 - SHIELD: 50mΩ /MAX.
 - LLCR MAX. CHANGE OF ALL PINS: 10m .
 - 4-3.INSULATION RESISTANCE: 100MΩ MIN
 - 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25~C~+85~C.
- 6.IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

一般公差GENERAL TOLERANCE

X.X ±0.30	X* ±2°
X.XX ±0.20	X.X* ±1°
X.XXX ±0.10	▲MAJOR DIM.

单位UNIT
mm



绘图 DR.

校对 CHK.

审核 CHK.

核准 APPD.

料号 PART NO.

W-UTP-L1110-G24P

文件编号 NUMBER

ENDPT01

品名TITLE

USB TYPE C PLUG 24 PIN立式

JCTC®

TERMINAL&CONNECTORS


比例SCALE
1/1

SHEET
1/2


版次REV.
A0

A0	20.04.26	新图面发行	董东平	杨章雄
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.




环保物料

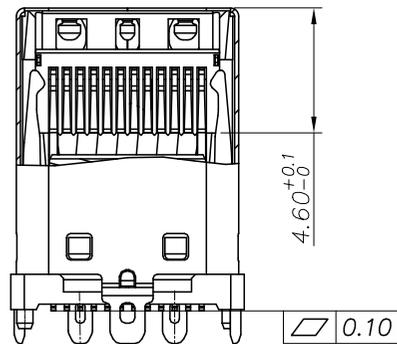

SECTION: A-A

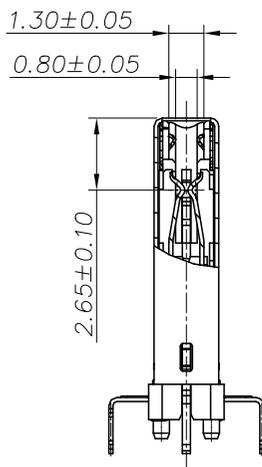


SECTION: B-B

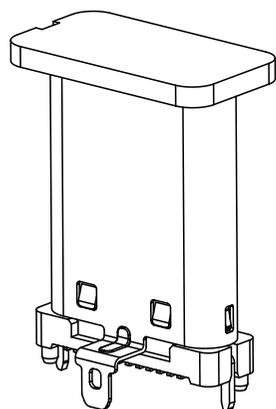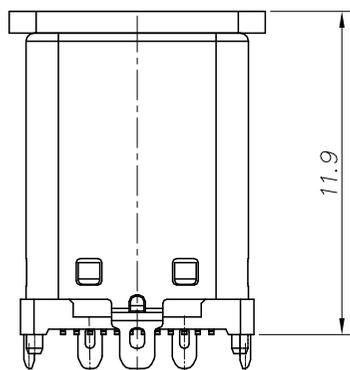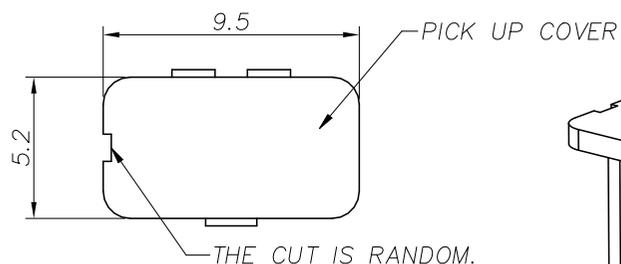

AFTER WITH PICKUP COVER

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

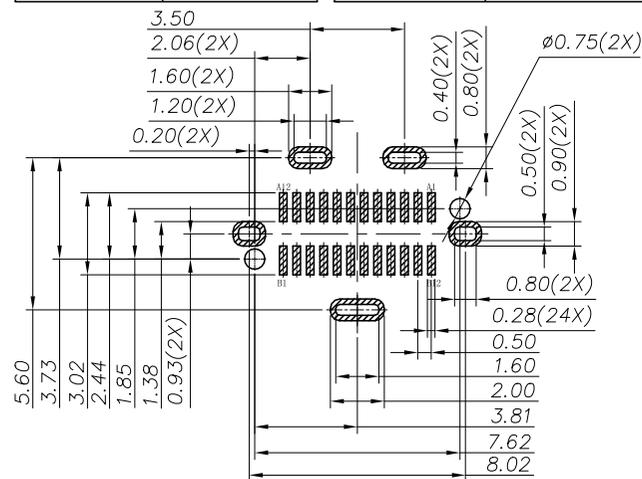

RECOMMENDED PCB LAYOUT (TOP VIEW)
THICKNESS 0.8±0.10MM; DEFAULT TOLERANCE: ±0.05

一般公差 GENERAL TOLERANCE

X.X ±0.30	X* ±2*
X.XX ±0.20	X.X* ±1*
X.XXX ±0.10	▲ MAJOR DIM.

单位 UNIT
mm

绘图 DR.
校对 CHK.
审核 CHK.
核准 APPD.

料号 PART NO.
W-UTP-L1110-G24P

文件编号 NUMBER
ENDPT01




品名 TITLE
USB TYPE C PLUG 24 PIN立式

JCTC®
TERMINAL&CONNECTORS



比例 SCALE 1/1
SHEET 2/2
版次 REV. A0

A0	20.04.26	新图面发行	董东平	杨章雄
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.

环保物料

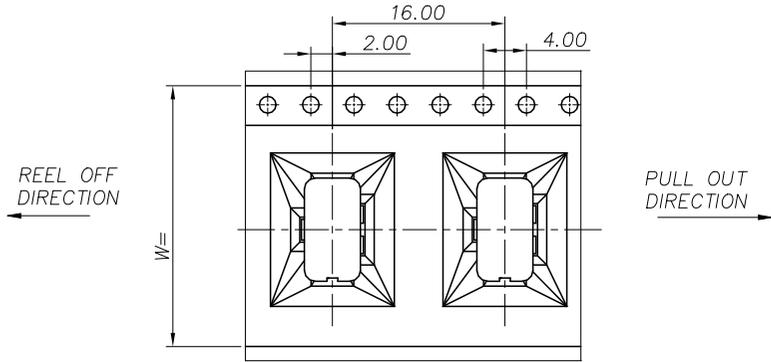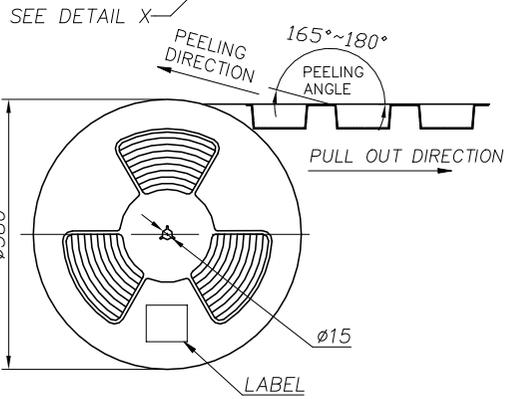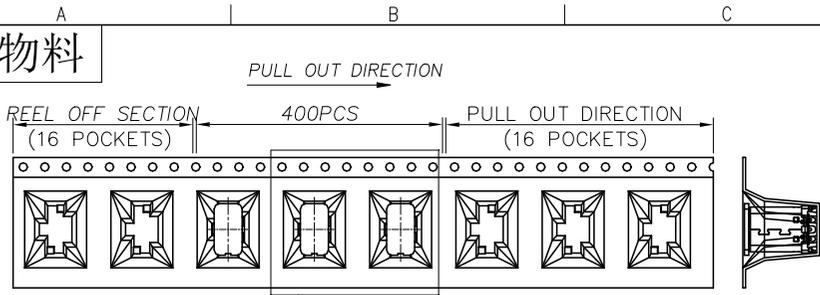

DETAIL X
SCALE 2:1

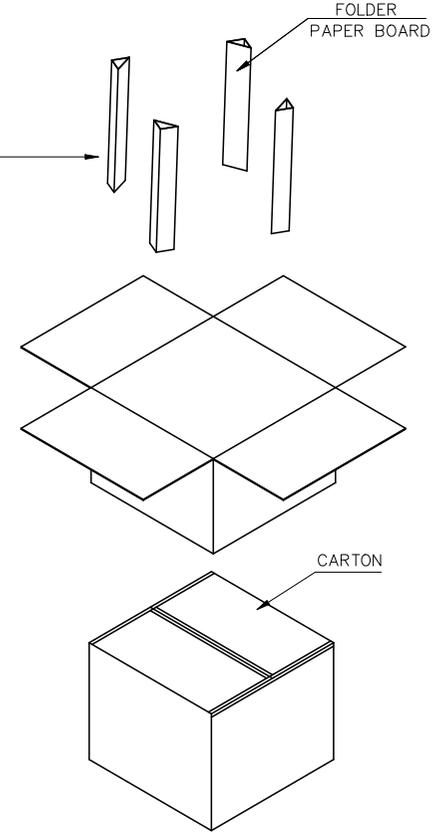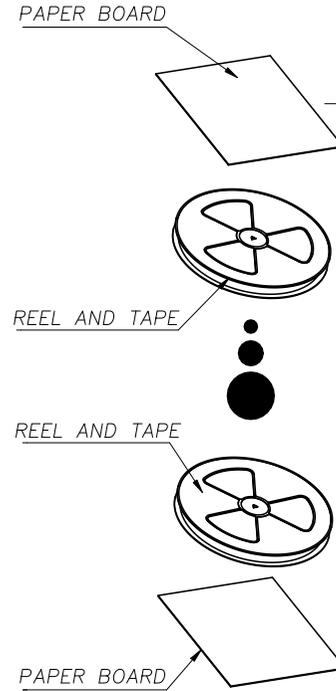


	REEL/TRAY	CARTON
CONNECTOR (PCS)	400	4000

一般公差GENERAL TOLERANCE

X.X ±0.30	X* ±2°
X.XX ±0.20	X.X* ±1°
X.XXX ±0.10	▲MAJOR DIM.

单位UNIT
mm



绘图 DR.
校对 CHK.
审核 CHK.
核准 APPD.

料号 PART NO.
W-UTP-L1110-G24P

文件编号 NUMBER
ENDPT01

品名TITLE
USB TYPE C PLUG 24 PIN立式

JCTC®
TERMINAL&CONNECTORS

比例SCALE	SHEET	版次REV.
1/1	1/1	A0

A0	20.04.26	新图面发行	董东平	杨章雄
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.