
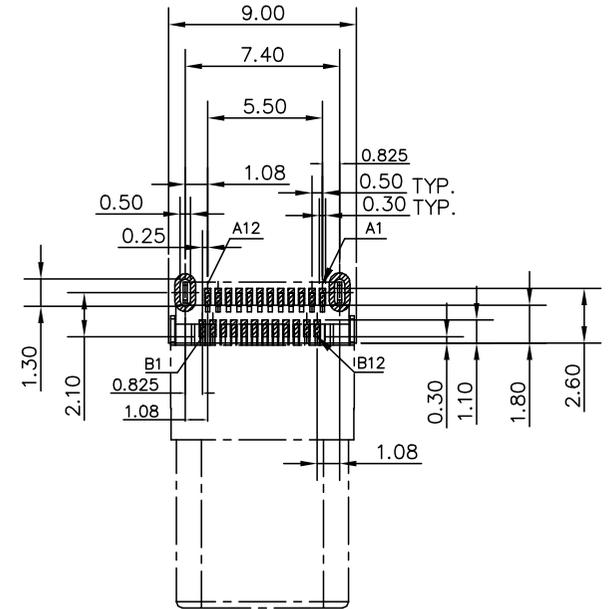



RoHS 2.0+HF

带塞子示意图

检验规范

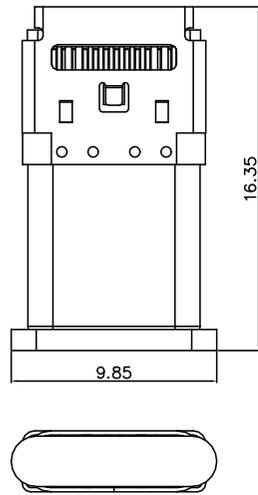

RECOMMENDED P.C.B. LAYOUT
T=0.80 OR 1.00mm
TOLERANCE UNSPECIFIED ±0.05mm

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use(SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair--Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair--Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair--Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair--Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuration Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

A0	19.5.10	新图面发行	李兴泽	杨章雄
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核CHK.	核准APPD.

一般公差 GENERAL TOLERANCE	
X.X ±0.35	X° ±6°
X.XX ±0.25	X.X° ±3°
X.XXX ±0.15	▲ MAJOR DIM.
单位 UNIT	
mm	

绘图 DR.	
审核 CHK.	
核准 APPD.	

料号 PART NO.	文件编号 NUMBER
W-UTP-L1550-P01	ENDPW03
品名 TITLE	
USB TYPE C PLUG SMT MIDDLE MOUNT RIGHT ANGLE L=15.5MM	

JCTC ®		
比例 SCALE	SHEET	版次 REV.
1:1	2/2	A0