
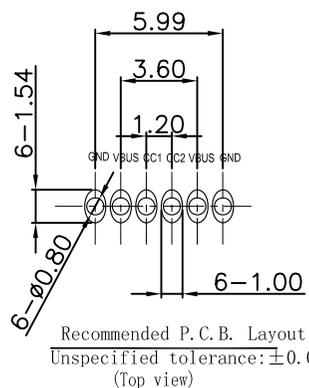
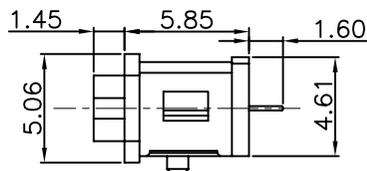
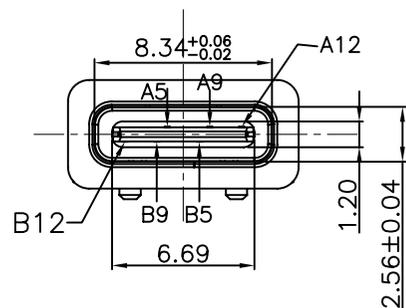
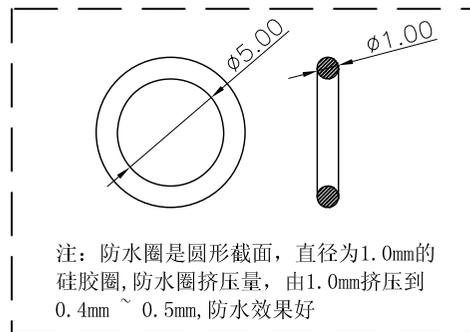
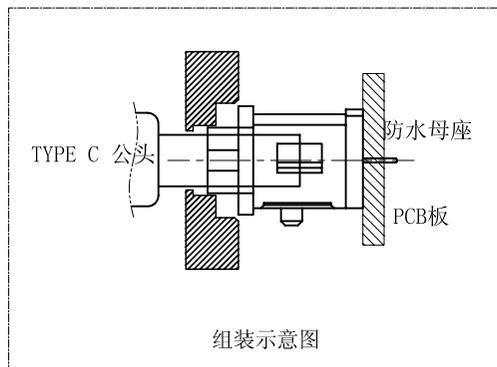


环保物料

检验规范

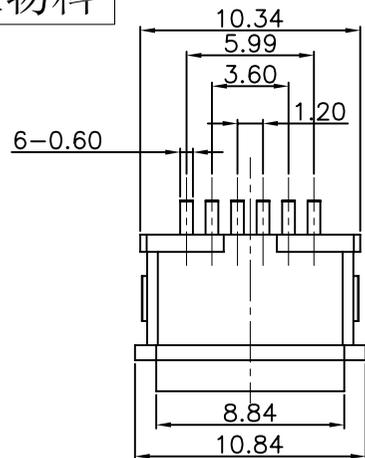

NOTES:
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES




A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni: 40~120u"
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni: 40~160u"; Au: CONTACT AREA: 3u", OTHER AREA: G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

一般公差 GENERAL TOLERANCE

X.X	±0.30	X*	±2*
X.XX	±0.20	X.X*	±1*
X.XXX	±0.10	▲ MAJOR DIM.	

单位 UNIT
mm



绘图 DR. 李兴泽
校对 CHK.
审核 APPD.

料号 PART NO.
W-UTP-L730-FS6P

文件编号 NUMBER
ENDPT01

JGTC®
TERMINAL&CONNECTORS

品名 TITLE
USB TYPE C 6 PIN 防水

比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0

A0	20. 3. 15	新图面发行	李兴泽		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	