


RoHS 2.0+HF

检验规范

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
 - 2.CONTACTS: COPPER ALLOY
 - 3.MID PLATE: STAINLESS STEEL
 - 4.FRONT SHELL: STAINLESS STEEL
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - Ni 50u" MIN. UNDER PLATED OVER ALL.
 - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
 - 2-2.FRONT SHELL:
 - Ni 30u" MIN. UNDER PLATED OVER ALL.
 - 2-3.MID PLATE:
 - CLEAR ONLY
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING:5.0A
VOLTAGE RATING:5.0V
 - 4-2. LLCR:
 - VBUS & GND PINS AND OTHER PINS: 40m*/PIN MAX.
 - SHIELD: 50m*/MAX.
 - LLCR MAX. CHANGE OF ALL PINS: 10m*
 - 4-3.INSULATION RESISTANCE: 100M* MIN
 - 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25-C~+85-C.
- 6.IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

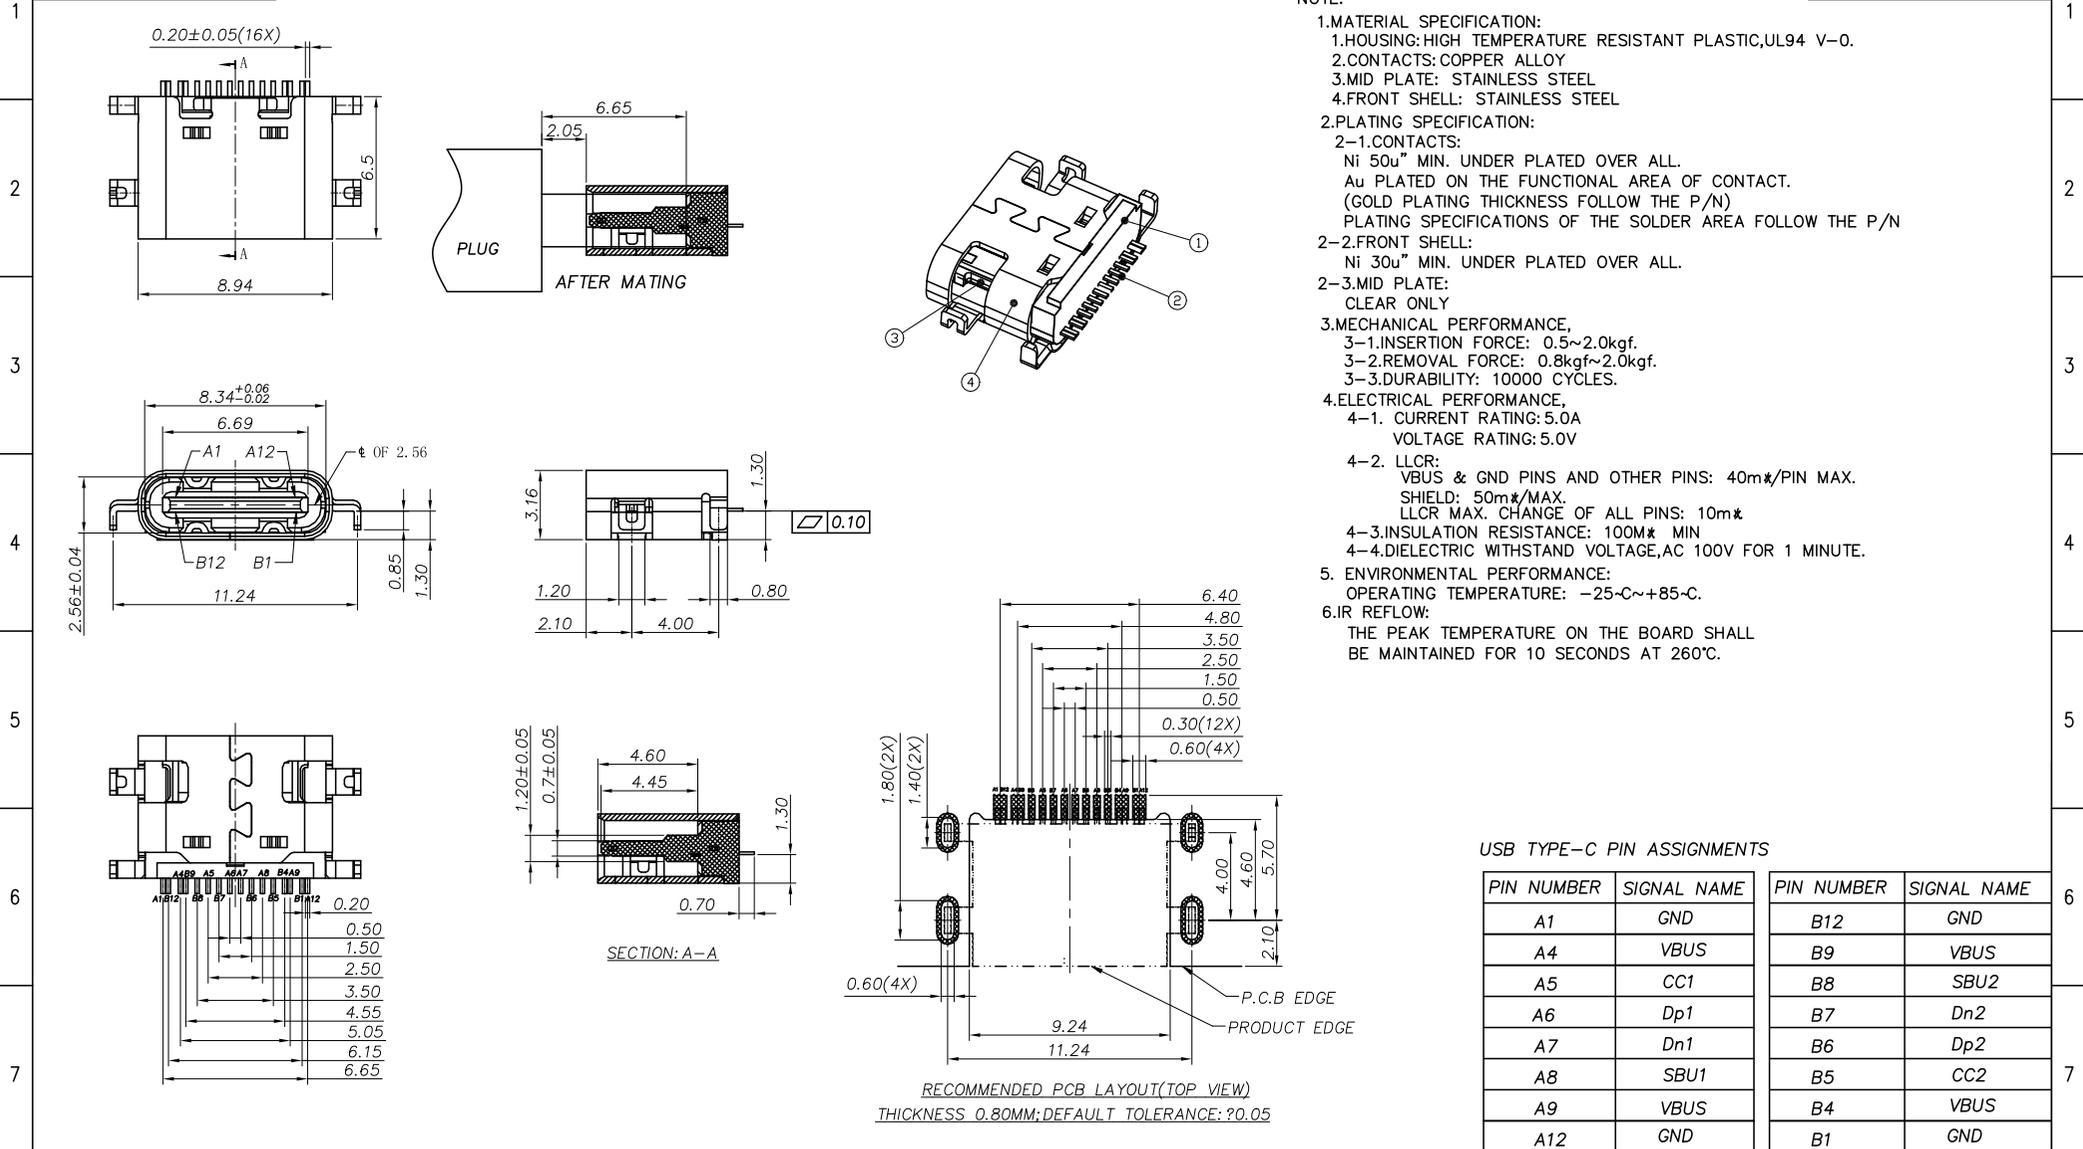


USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND






		一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER		JCTC ®	
		X.X ±0.35	X° ±6°	审核 CHK.		W-UTP-MH130-16P		ENDPW03			
		X.XX ±0.25	X.X° ±3°	核准 APPD.		品名 TITLE		USB CF 16PIN (L=6.5) MID-MOUNT 1.30mm		比例 SCALE	
		X.XXX ±0.15	▲ MAJOR DIM.							SHEET 1/1	
A0		19.05.31	新版发行	LXZ	DDP					版次 REV. A0	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核CHK.	核准APPD.	单位 UNIT mm						

RoHS 2.0+HF

包装规范

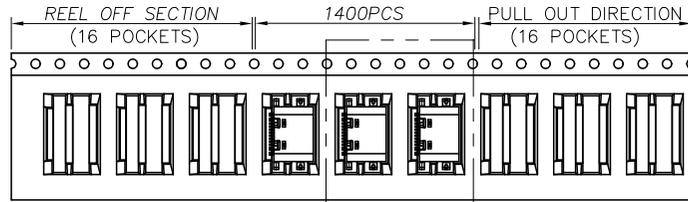

SEE DETAIL X

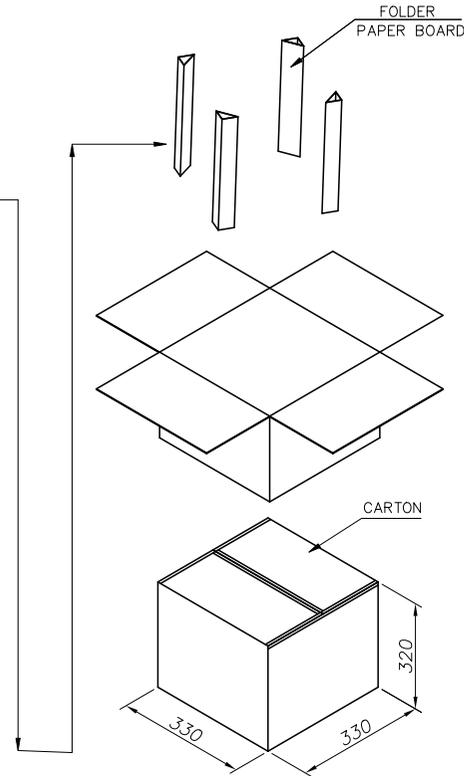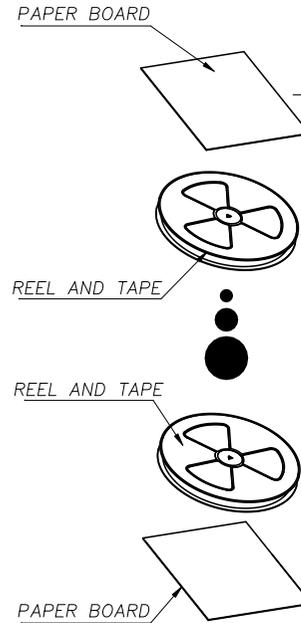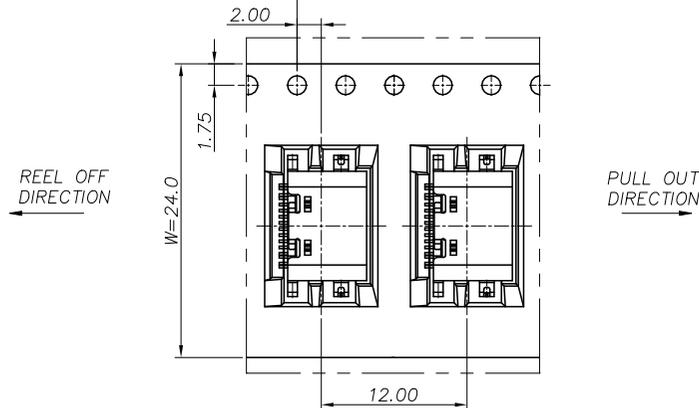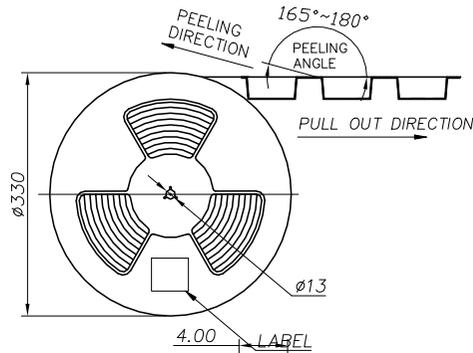


	REEL	CARTON
CONNECTOR (PCS)	1400	14000

一般公差 GENERAL TOLERANCE

X.X	± 0.35	X°	$\pm 6^\circ$
X.XX	± 0.25	X.X°	$\pm 3^\circ$
X.XXX	± 0.15	▲ MAJOR DIM	

单位 UNIT
mm



绘图 DR.

审核 CHK.

核准 APPD.

料号 PART NO.

W-UTP-MH130-16P

文件编号 NUMBER

ENDPW10

JCTC®

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	19.05.31	新版发行	LXZ	DDP

品名 TITLE
USB CF 16PIN (L=6.5) MID-MOUNT 1.30mm
(包装图)

比例 SCALE	SHEET	版次 REV.
1:1	1/1	A0