






SECTION A-A
SCALE 1:1

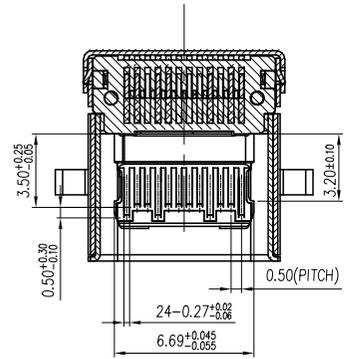


SECTION B-B

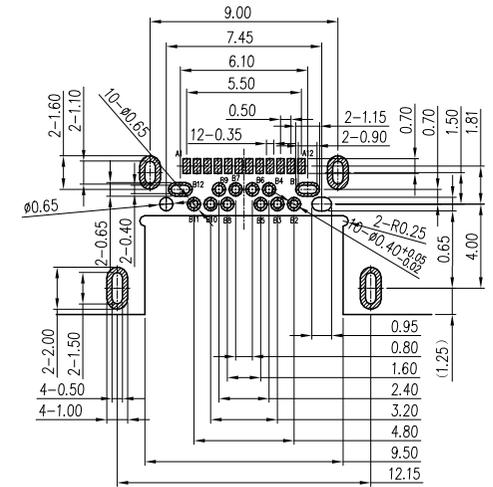

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE: ±0.05

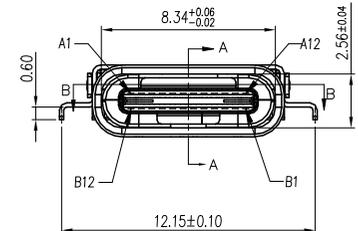


- NOTE:
- MATERIAL:
 - INSULATOR: HIGH TEMPERATURE PLASTIC UL94 V-0; Black Color
 - CONTACT: COPPER ALLOY. GOLD/Matte Tin PLATED.
 - OUTER SHELL: STAINLESS STEEL, Nickel PLATED.
 - INNER SHELL: IRON MATERIAL, Nickel PLATED.
 - GROUND SHIELD: STAINLESS STEEL.
 - MID PLATE: STAINLESS STEEL.
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ CHANGE AFTER DURABILITY TEST
 - CONTACT CURRENT RATING: 5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - INSULATION RESISTANCE 100MΩ Min
 - OPERATING TEMPERATURE: -40°C ~ 80°C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 5~20 N.
 - UNMATED FORCE: INITIAL 8~20N; 6~20N AFTER DURABILITY TEST
 - DURABILITY: 10,000 CYCLES

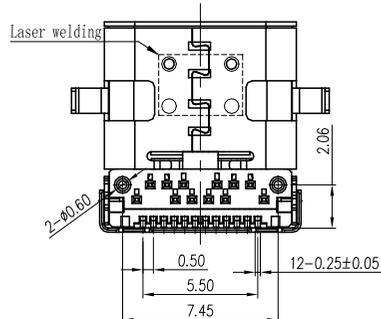

A12	GND	B1	GND
A11	SSRxp2	B2	SSTxp2
A10	SSRxn2	B3	SSTxn2
A9	VBUS	B4	VBUS
A8	SBU1	B5	CC2
A7	Dn1	B6	Dp2
A6	Dp1	B7	Dn2
A5	CC1	B8	SBU2
A4	VBUS	B9	VBUS
A3	SSTxn1	B10	SSRxn1
A2	SSTxp1	B11	SSRxp1
A1	GND	B12	GND

Pin NO. Signal name Pin NO. Signal name



W-UTP-E029-24P	LCP, Black, 30U/Matte tin
W-UTP-B029-24P	LCP, Black, 15U/Matte tin
W-UTP-G029-24P	LCP, Black, FU/Matte tin
PART NUMBER	REMARK

					一般公差 GENERAL TOLERANCE		绘图 DR.		料号 PART NO.		文件编号 NUMBER				
					X.X ±0.35	X° ±6°	审核 CHK.		W-UTP-X029-24P		ENDPW03				
					X.XX ±0.25	X.X° ±3°			核准 APPD.		品名 TITLE		USB TYPE C Female Connector		比例 SCALE
					X.XXX ±0.15	▲ MAJOR DIM.					CL=0.29mm		1:1	1/1	A0
A0	2023.06.21	新版发行	Hap	Joshua	单位 UNIT	mm									
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.											