


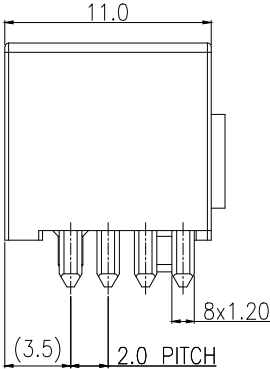

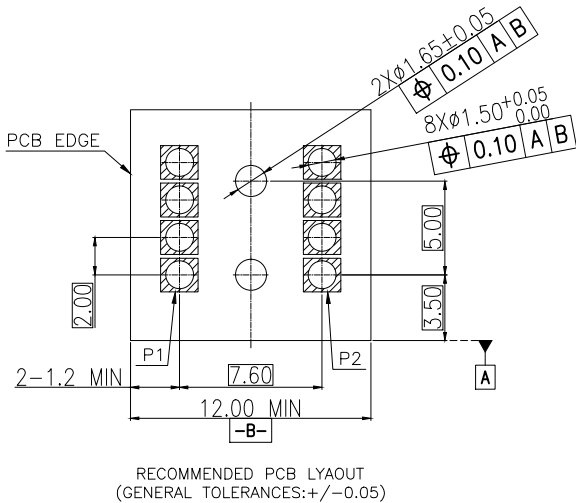


RoHS 2.0+HF

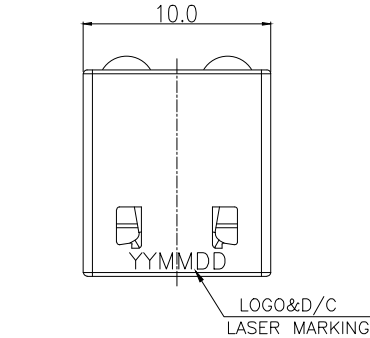


日期编码说明
Y Y M M D D
日 (11代表11号)
月 (07代表7月)
年 (24代表2024年)

SPECIFICATIONS:
1.Material And Finish:
• Insulator:High Temperature Thermoplastic UL94 V-0 Black.
• Contact:Copper Alloy.
Gold(30u" Min) Plated Over Nickel(50u" Min) Plated On Mating Area.
Matte Tin(80u" Min) Plated Over Nickel(50u" Min) On Solder Area.
2.Electrical Specification:
• Contact Resistance: 15mΩ Max for initial.
• Withstanding Voltage: No Defect Or Breakdown Between Adjacent Contacts.
• Voltage Rating: 54V DC.
• Current Rating: 40A
3.Mechanical Specification:
• Durability: 200 Cycles.
4.Environmental Specification:
• Operating Temperature: -40°C ~ +85°C.
5.The Product Using Material And Processing Must Conform To The "WI-PZ-142"HSF Technical Standard Control Requirements.
6.P/N Order

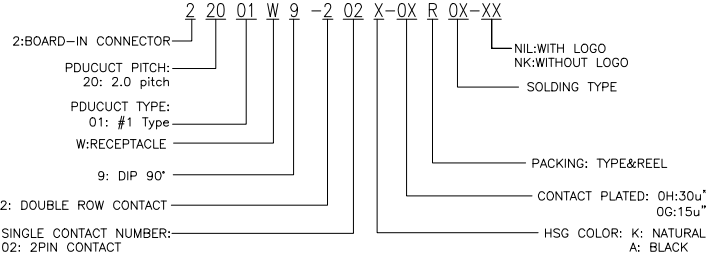

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
AO	FIRST RELEASE	2024.12.30		LINEAR	ANGLES	1:1								
				0.0±0.25	X° REF±6°	APPROVED	Daniel Dong	2024.12.30	22001W9-202X-0XT0X	ENDE05				
				UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	Jackie Tan	2024.12.30	TITLE				
				0.00±0.15	X° ±3°				40A 2PIN POWER RA RECEPTACLE H=10.5mm					
			SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	Jackie Tan	2024.12.30			REV	AO	SHEET	1/1

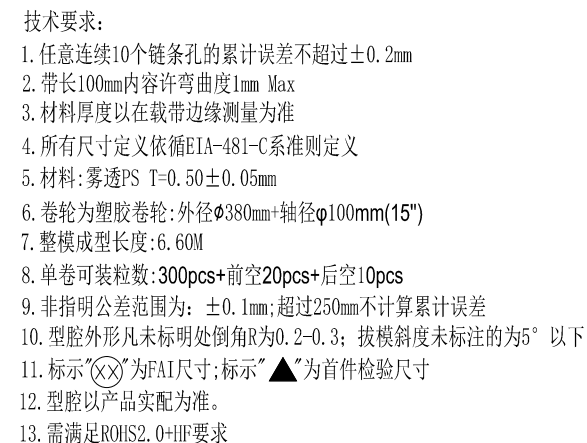

						一般公差GENERAL TOLERANCE		绘 图 DR.	王曦	料号 PART NO.	文件编号 NUMBER	JCTC ®			
						X.X ±0.15 X.XX ±0.05 X.XXX ±0.02	X° ±2° X.X° ±1°	审 核 CHK.		YD-22001W9-2D-02P-02	ENDE10				
X0	2025. 12. 02	新版发行		谭艳斌	董东平	单位 UNIT mm	 	核 准 APPD.		品名TITLE 40A POWER VT(DIP L=2.20)RECEPTACLE		比例SCALE 1:1	SHEET 1/1	版次 REV. X1	
版次REV.		日期 DATE	变 更 内 容 DESCRIPTION	审核CHK.	核准APPD.										
A			B			C			D		E		F		