
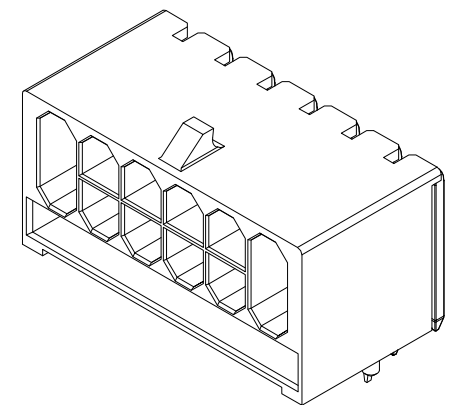
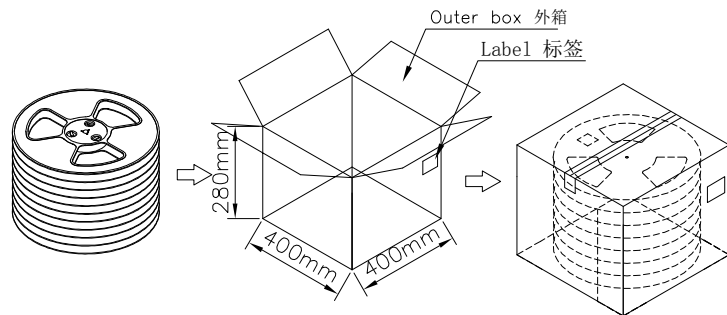




JCTC®

[illegible]

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance $\pm 0.2\text{MM}$; 圆孔十个孔距离累计允许公差为 $\pm 0.2\text{mm}$
3. Carrier Tape Material for PS ; 下带材质为PS材质; Color颜色: Transparent 透明色
4. bracer保护带: Color颜色:Natural透明色;厚度0.40mm最小
5. The Reel Material for PS ; 卷盘材质为PS材质; Color颜色: Blue 蓝色
6. Thickness=0.50 $\pm$ 0.05 ; 材料厚度为0.50 $\pm$ 0.05mm
7. Cover Tape上带: 冷风自粘带

210	5	1050	XXKG	XXKG
PCS/ TAPE	REELS/ BOX	PCS/BOX	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
A0	Initial release	26.01.06		LINEAR	ANGLES	APPROVED	Jackie Tan	26.01.06	13021W9-206A-3ERxx	ENDE05				
				0.0±0.25	X° REF±6°									
				UNIT: MM	0.00±0.20	X° ±3°	DESIGNER	Daniel Dong	26.01.06	TITLE 3.00+1.5mm Pitch 2X6+12PIN WAFER				
				SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	26.01.06					
											REV	A0	SHEET	2/2

