


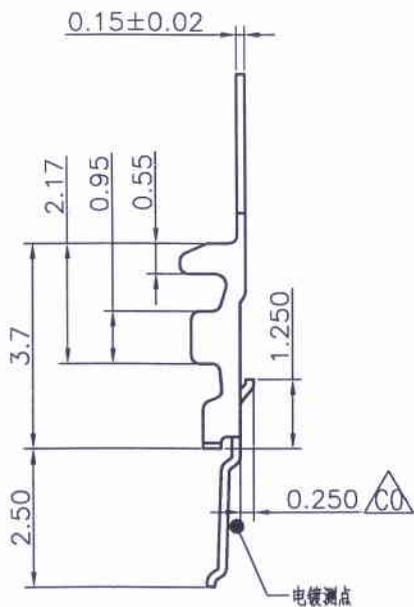



RoHS

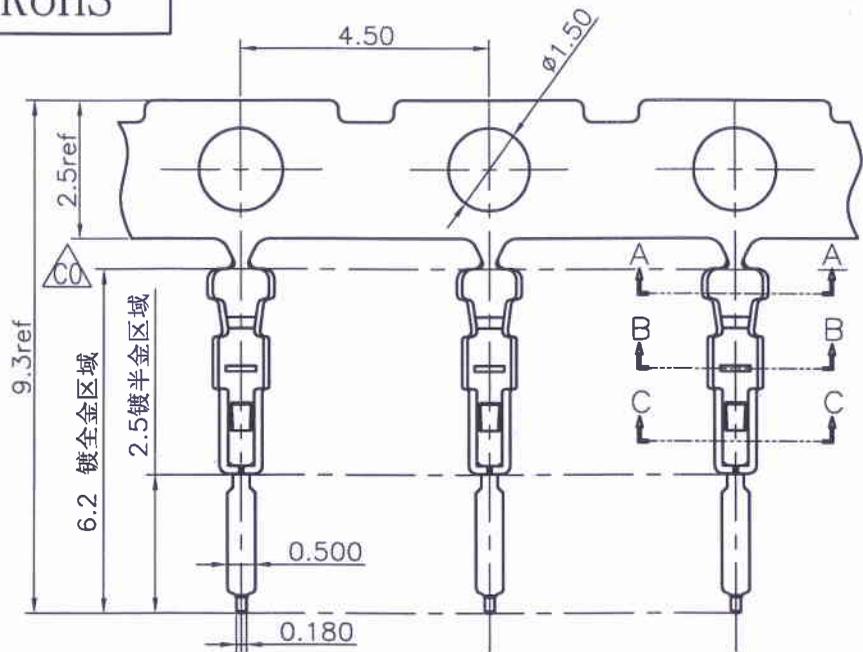

DETAIL A-A



DETAIL B-B



DETAIL C-C

PART NO:11001TOP-XX-NK

△C1	5A--Gold-flash	5B--2u"	5C--3u"	5D--4u"	5E--5u"
	5F--10u"	5G--15u"	5H--30u"	5I--50u"	
	0A--Gold-flash	0B--2u"	0C--3u"	0D--4u"	0E--5u"
	0F--10u"	0G--15u"	0H--30u"	0I--50u"	



Part No.	Wire Range	Insulation O.D	Material	Finish	Qty/reel
11001TOP-5X-NK	AWG#28~#32	0.75mm(Max)	Phosphor Bronze	Gold-plated	15,000 pcs
11001TOP-0X-NK	AWG#28~#32	0.75mm(Max)	Phosphor Bronze	Gold-plated contact area	15,000 pcs
11001TOP-5X-S1-NK	AWG#28~#32	0.75mm(Max)	Phosphor Bronze	Shiny Nickel30u";Gold-plated	15,000 pcs

REV.	REVISION RECORD	DATE	UNIT	SIZE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
C2	TR1105310082	11.05.31		A4	LINEAR	1:1	APPROVED	17.03.20		11001TOP-XX-NK
C3	TN1407020104	14.07.02			0.0±0.25	X° REF±6°	DESIGNER			
C4	新增镀亮金规格	15.01.21	0.00±0.15	X° ±3°	DRAWN	卢小锋	FIX 端子	REV: C5 SHEET: 1/1		
C5	变更公司名称	17.03.20	0.000±0.08	X° X'±2°						