
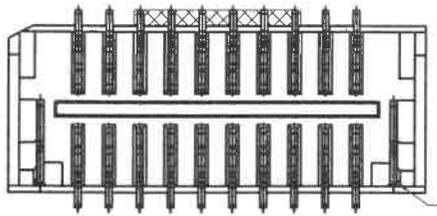
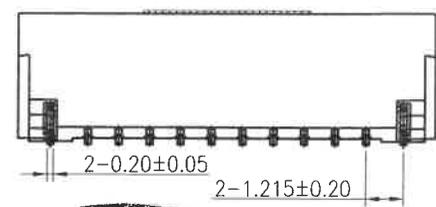
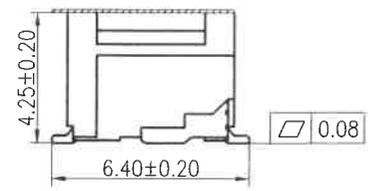


SPECIFICATIONS
 Voltage Rating: 50V AC,DC
 Current Rating: 1A AC,DC
 Withstanding Voltage: 500V AC/minute
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Temperature Range: -25°C ~ +85°C
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

11006W00-2XNP-S-C-XX-HF-NK-R
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ S: SMT type
- ⑤ C: C type
- ⑥ XX: Plating
- ⑦ HF : Halogen Free
- ⑧ NK : No Mark
- ⑨ R : Reel pack(With Mylar)

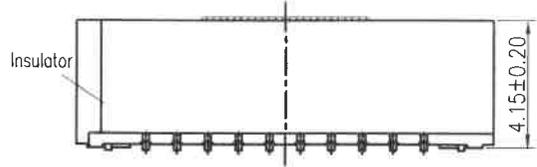









Circuits Part No	Dimensions		
	A	B	C
2X5P	5.80	4.00	8.50
2X6P	6.80	5.00	9.50
2X7P	7.80	6.00	10.50
2X10P	10.80	9.00	13.50
2X12P	12.80	11.00	15.50
2X15P	15.80	14.00	18.50
2X20P	20.80	19.00	23.50
2X25P	25.80	24.00	28.50

Part No.	Insulator	Color	Pin Material	Solder Tabs
11006W00-2XNP-S-C-5A-HF-NK-R	High temperature plastic,UL94V-0	Beige	Phosphor Bronze/Gold-flash	Brass/Gold-flash Over Ni
11006W00-2XNP-S-C-5C-HF-NK-R	High temperature plastic,UL94V-0	Beige	Phosphor Bronze/Au 3u	Brass/Gold-flash Over Ni
11006W00-2XNP-S-C-5G-HF-NK-R	High temperature plastic,UL94V-0	Beige	Phosphor Bronze/Au 15u	Brass/Gold-flash Over Ni
11006W00-2XNP-S-C-3E-HF-NK-R	High temperature plastic,UL94V-0	Beige	Phosphor Bronze/Matte Tin Over Ni	Brass/Matte Tin Over Ni

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC®			
A0	Initial Release	2023.03.08	LINEAR	ANGLES	1:1								
A1	依ECN20231128768	2023.12.19	0.0±0.25	X° REF±6°	APPROVED	<i>mu</i>	23.12.19	11006W00-2XNP-S-C-XX-HF-NK-R	ENDE05				
			0.0±0.15	X° ±3°	DESIGNER	<i>WJY</i>	23.12.19	TITLE					
			0.000±0.08	X° X' ±2°	DRAWN	WDH	2023.12.19	1.00mm PITCH 双排 CONN-贴麦拉 (两侧加厚)					
			UNIT: MM							REV	A1	SHEET	1/2


1 2 3 4 5 6 7

A
B
C
D
E
F
G
H

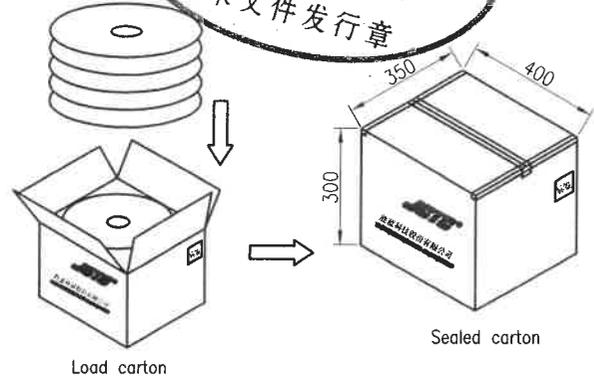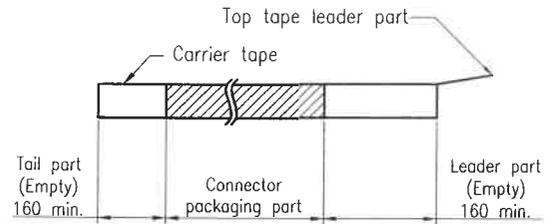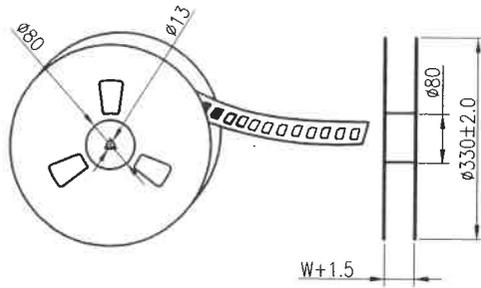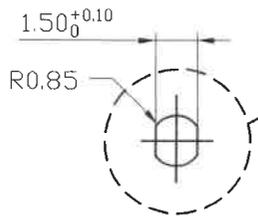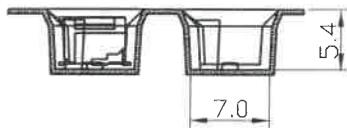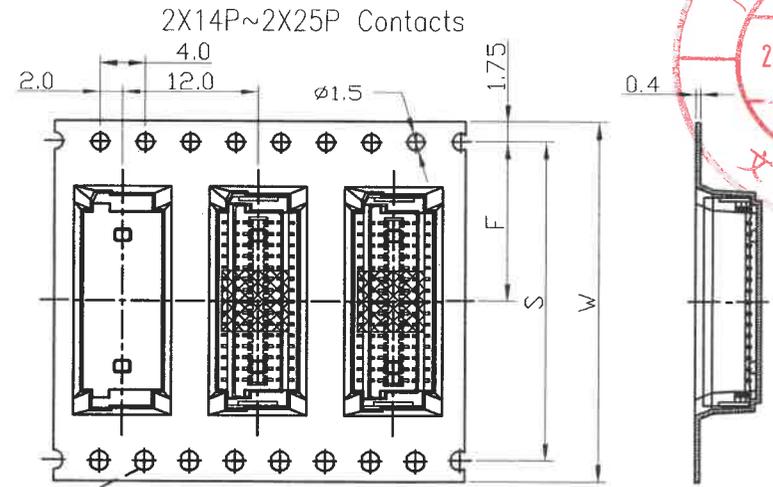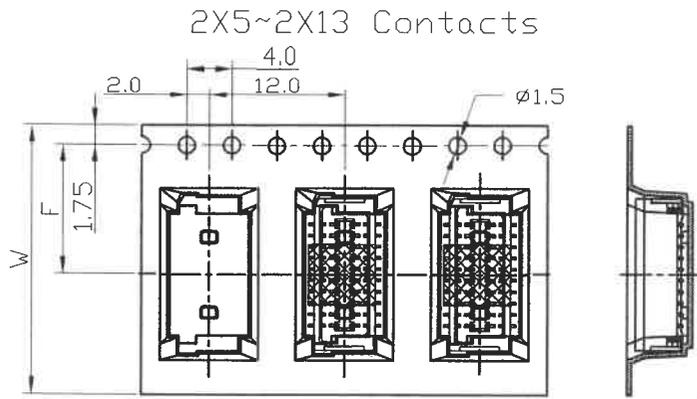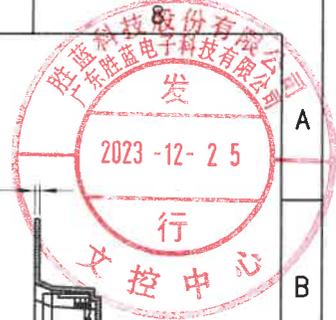

Number of Contacts	W±0.3	F±0.1	S±0.1	Pcs/Reel	Pcs/Box
2X6P~2X13P	24	11.50	--	1,000	10,000
2X14P~2X16P	32	14.20	28.40	1,000	8,000
2X20P~2X25P	44	20 20	40 40	1 000	6 000

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
A0	Initial Release	2023.03.08	 LINEAR: 0.0±0.25 ANGLES: X° REF±6°	 X° ±3°	1:1			11006W00-2XNP-S-C-XX-HF-NK-R	ENDE05
A1	依ECN20231128768	2023.12.19			 SIZE: A4 0.000±0.08 X° X' ±2°	 APPROVED: <i>ym</i> DESIGNER: <i>WJY</i> DRAWN: <i>WDH</i>	23.12.19	23.12.19	TITLE: 1.00mm PITCH 双排 CONN-贴麦拉 (两侧加厚)

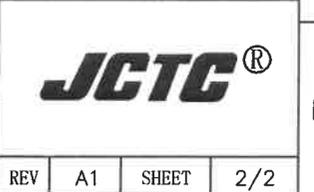

1 2 3 4 5 6 7 8