
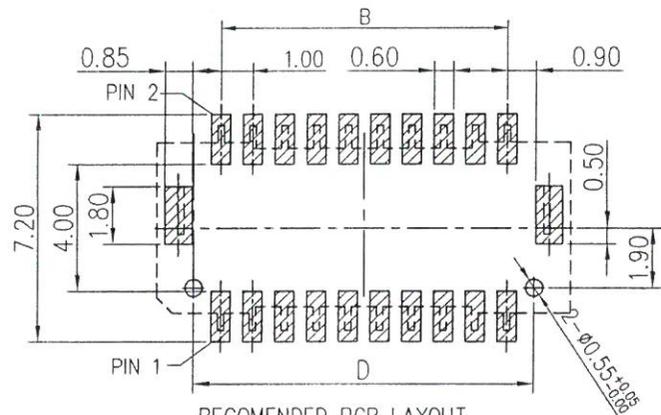






1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

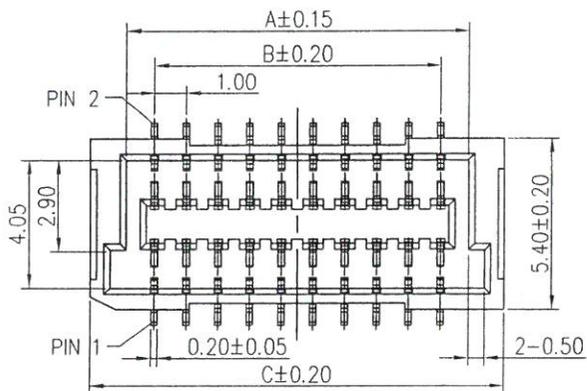

RECOMENDED PCB LAYOUT
TOLERANCT±0.05mm

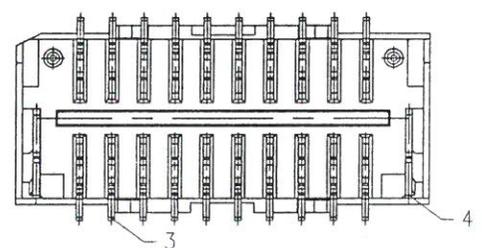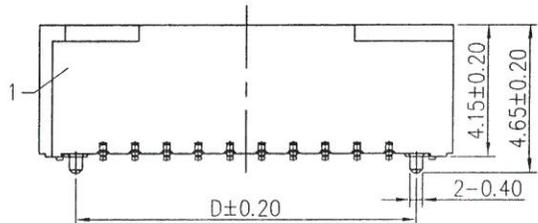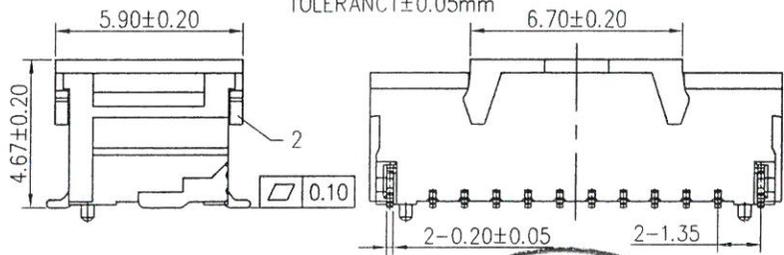

SPECIFICATIONS
Voltage Rating: 50V AC,DC
Current Rating: 1A AC,DC
Withstanding Voltage: 500V AC/minute
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Temperature Range: -25°C ~ +85°C
The product using material and processing must conform to the "MI-PZ-142" HSF technical standard control requirements

11006W00-2XNP-SF-XX-HF-NK-R
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ S: SMT type
- ⑤ F : Boss type
- ⑥ XX : Finish
- ⑦ HF : Halogen Free
- ⑧ NK : No Mark
- ⑨ R : Reel pack





Circuits Part No	Dimensions			
	A	B	C	D
2X5P	5.75	4.00	8.00	5.70
2X7P	7.75	6.00	10.00	7.70
2X10P	10.75	9.00	13.00	10.70
2X12P	12.75	11.00	15.00	12.70
2X15P	15.75	14.00	18.00	15.70
2X20P	20.75	19.00	23.00	20.70

Part No.	Insulator	Color	Pin Material	Solder Tabs
11006W00-2XNP-SF-5A-HF-NK-R	High temperature plastic,UL94V-0	Beige	Phosphor Bronze/Gold-flash	Brass/Gold-flash Over Ni
11006W00-2XNP-SF-5D-HF-NK-R	High temperature plastic,UL94V-0	Beige	Phosphor Bronze/Au 4u"	Brass/Gold-flash Over Ni
11006W00-2XNP-SF-5G-HF-NK-R	High temperature plastic,UL94V-0	Beige	Phosphor Bronze/Au 15u"	Brass/Gold-flash Over Ni
11006W00-2XNP-SF-5H-HF-NK-R	High temperature plastic,UL94V-0	Beige	Phosphor Bronze/Au 30u"	Brass/Gold-flash Over Ni

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	
AO	新图面发行	18.04.16	 LINEAR ANGLES 0.0±0.25 X° REF±6°	1:1	APPROVED	wu	22.11.13	11006W00-2XNP-SF-XX-HF-NK-R	ENDE05	
A1	ECN201812250242	23.10.18								UNIT: MM 0.00±0.15 X° ±3° SIZE: M1 0.000±0.08 X° X' ±2°
					DRAWN	WJV	23.10.18			REV A1 SHEET 1/2



1 2 3 4 5 6 7 8

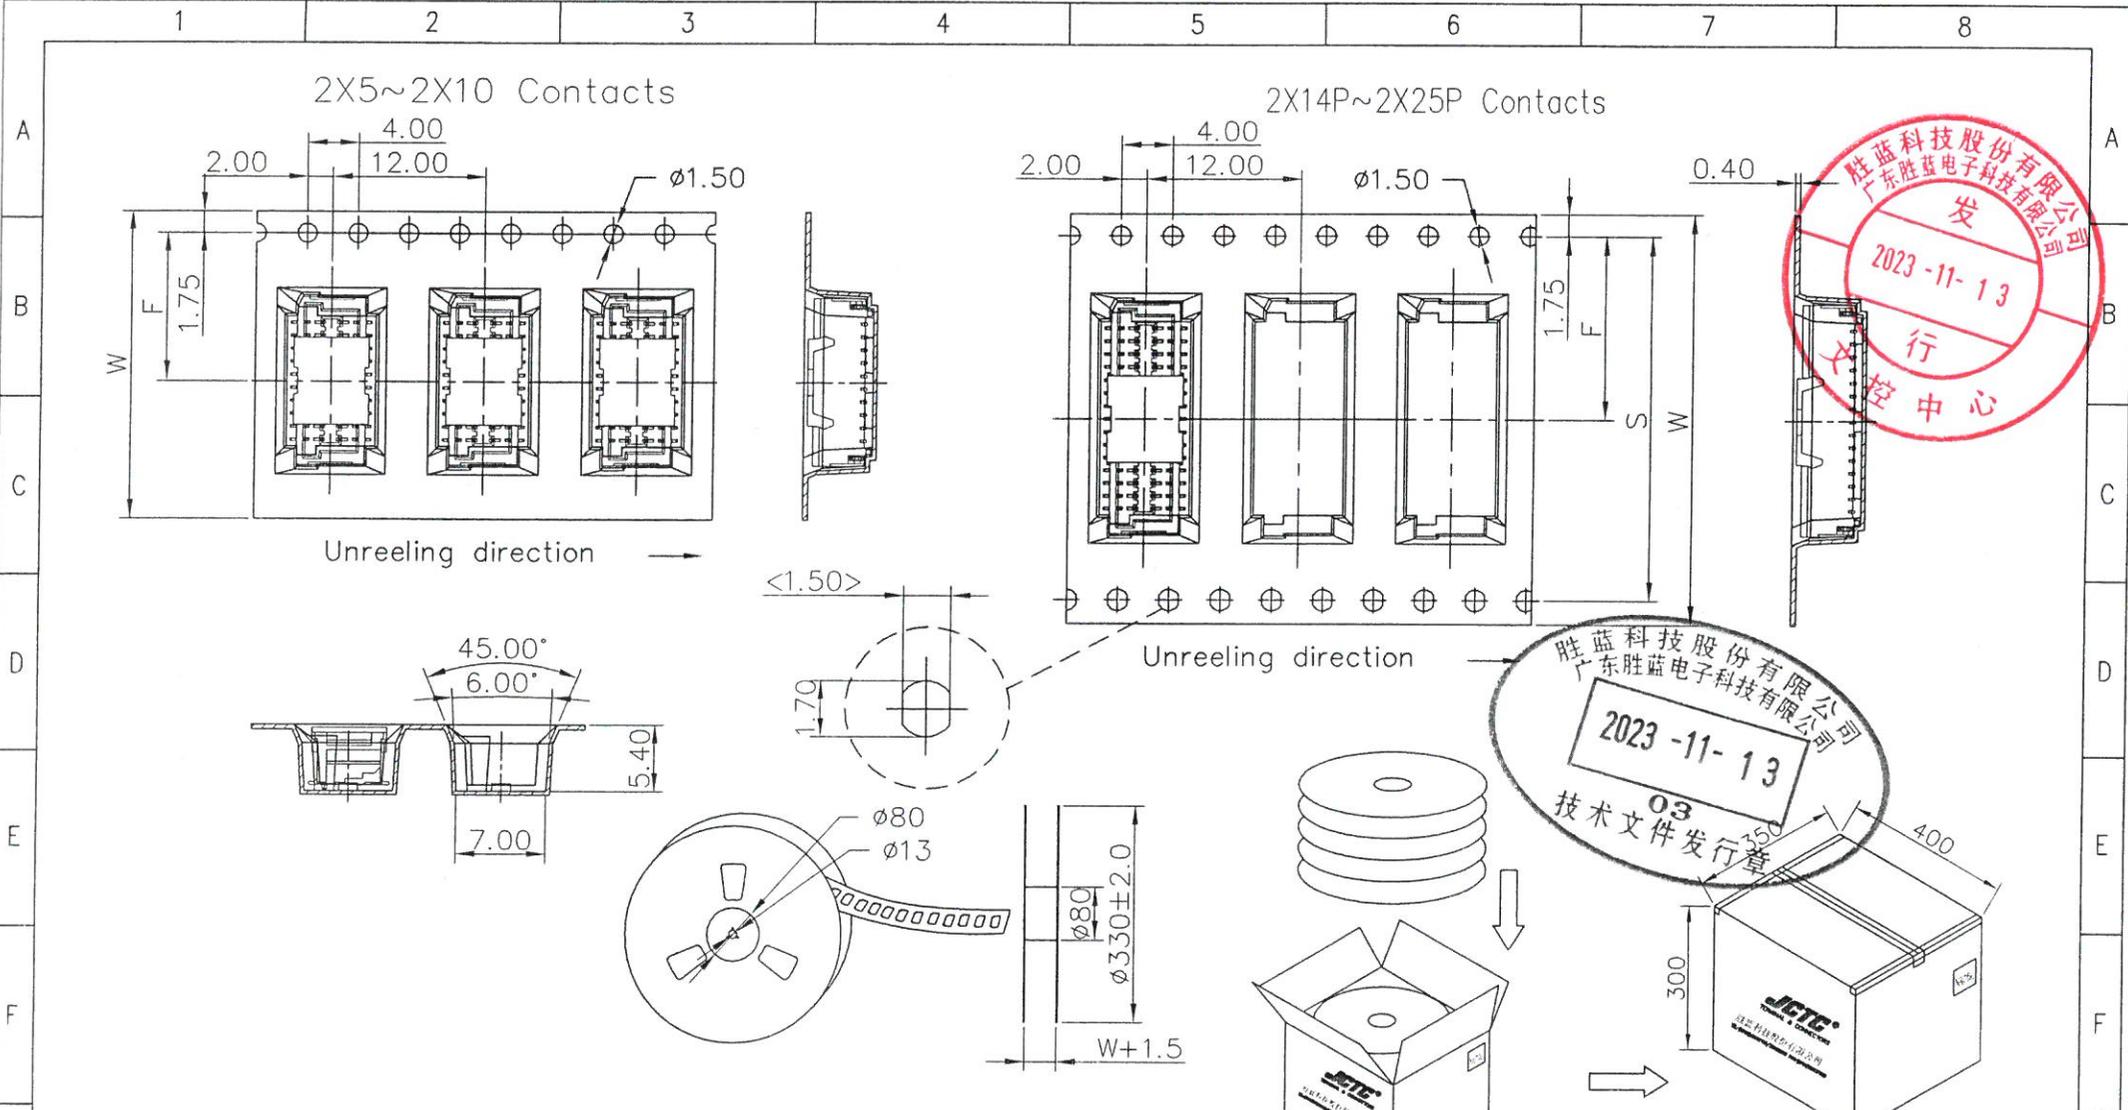

Number of Contacts	W±0.3	F±0.1	S±0.1	前空	后空	Q'ty/Reel	Q'ty/Box
2X7P~2X13P	24	11.50	--	20PCS	36PCS	1,000	10,000
2X14P~2X16P	32	14.20	28.40	20PCS	36PCS	1,000	8,000
2X20P~2X25P	44	20.20	40.40	20PCS	36PCS	1,000	6,000

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	
A0	新图面发行	18.04.16	 LINEAR: 0.0±0.25 ANGLES: X° REF±6° X° ±3°	 X° REF±6° X° ±3°	1:1					
A1	ECN201812250242	23.10.18			APPROVED	VM	23.11.13	11006W00-2XNP-SF-XX-HF-NK-R	ENDE05	
			UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	SP peM	23.11.13	TITLE	 JST 1.00mm PITCH 双排带防呆柱 CONN
			SIZE: A1	0.000±0.08	X° X'±2°	DRAWN	WJY	23.10.18	REV	
1	2	3	4	5	6	7	8	A1	SHEET	2/2