

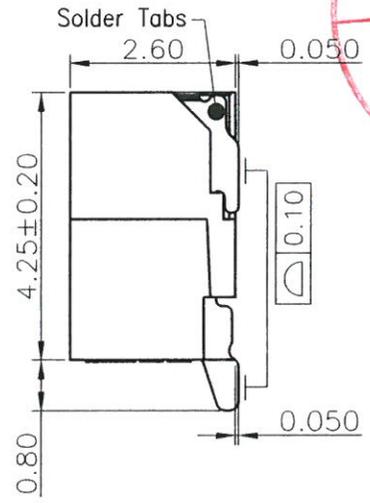
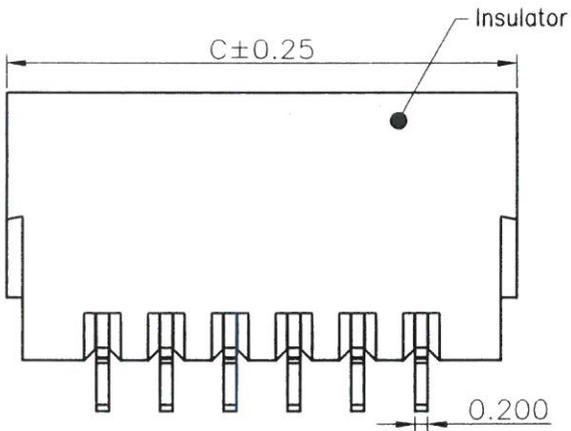
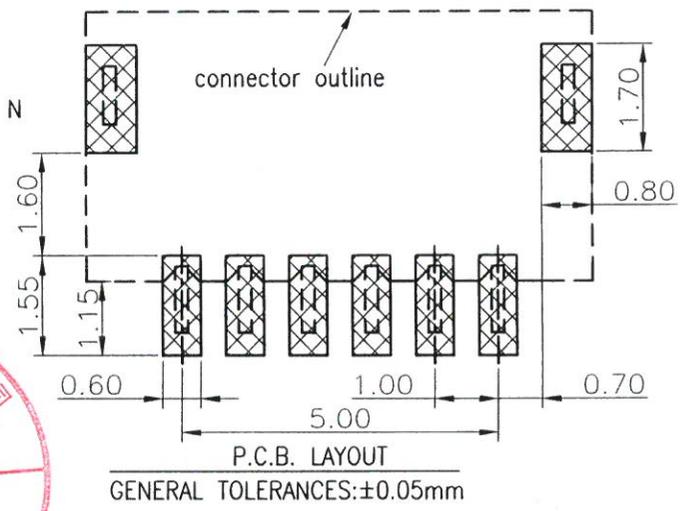


Specifications:
 Rated Voltage : 150V AC/DC
 Rated Current : 2A AC,DC(AWG 28#),Circuit 1 and N
 1A AC,DC(AWG 28#),Circuit Other
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements.

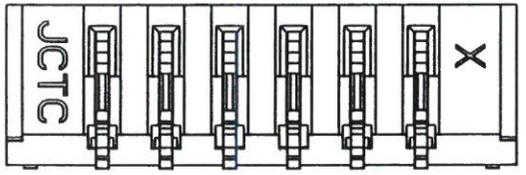


- 11008W90-NP-S-L1-HF-R
 ① ② ③ ④ ⑤ ⑥ ⑦
- ① Series No.
 - ② W90 : Side Contact
W00 : Up Contact
 - ③ No. of Circuits
 - ④ S : SMT TYPE
 - ⑤ L1: Lock TYPE
 - ⑥ HF : Halogen Free
 - ⑦ R : Tape & Reel

Circuits Part No	Dimensions		
	A	B	C
2P	2.50	--	4.00
3P	3.50	2.00	5.00
4P	4.50	3.00	6.00
5P	5.50	4.00	7.00
6P	6.50	5.00	8.00
7P	7.50	6.00	9.00
8P	8.50	7.00	10.00
9P	9.50	8.00	11.00
10P	10.50	9.00	12.00
11P	11.50	10.00	13.00
12P	12.50	11.00	14.00
13P	13.50	12.00	15.00
14P	14.50	13.00	16.00
15P	15.50	14.00	17.00

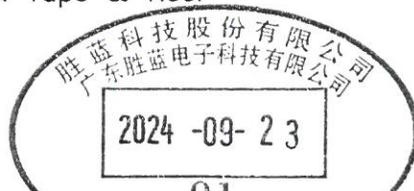

Part No.	Insulator	Contact	Solder Tabs
11008W90-NP-S-L1-HF-R	HTN,UL94V-0/Natural(Beige)	Phosphor Bronze/Matte-Tin	Brass/Matte-Tin

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
					LINEAR	ANGLES									
AO	新图面发行	2024.09.14			0.0±0.25	X° REF±6°	APPROVED	Jm	24.09.23	11008W90-NP-S-L1-HF-R	ENDE05	REV	AO	SHEET	1/2
					0.00±0.15	X° ±3°	DESIGNER	Wu	24.09.23	TITLE					
					0.000±0.08	X° X' ±2°	DRAWN	WDH	2024.09.14	1.00mm PITCH 90° SMT WAFER					

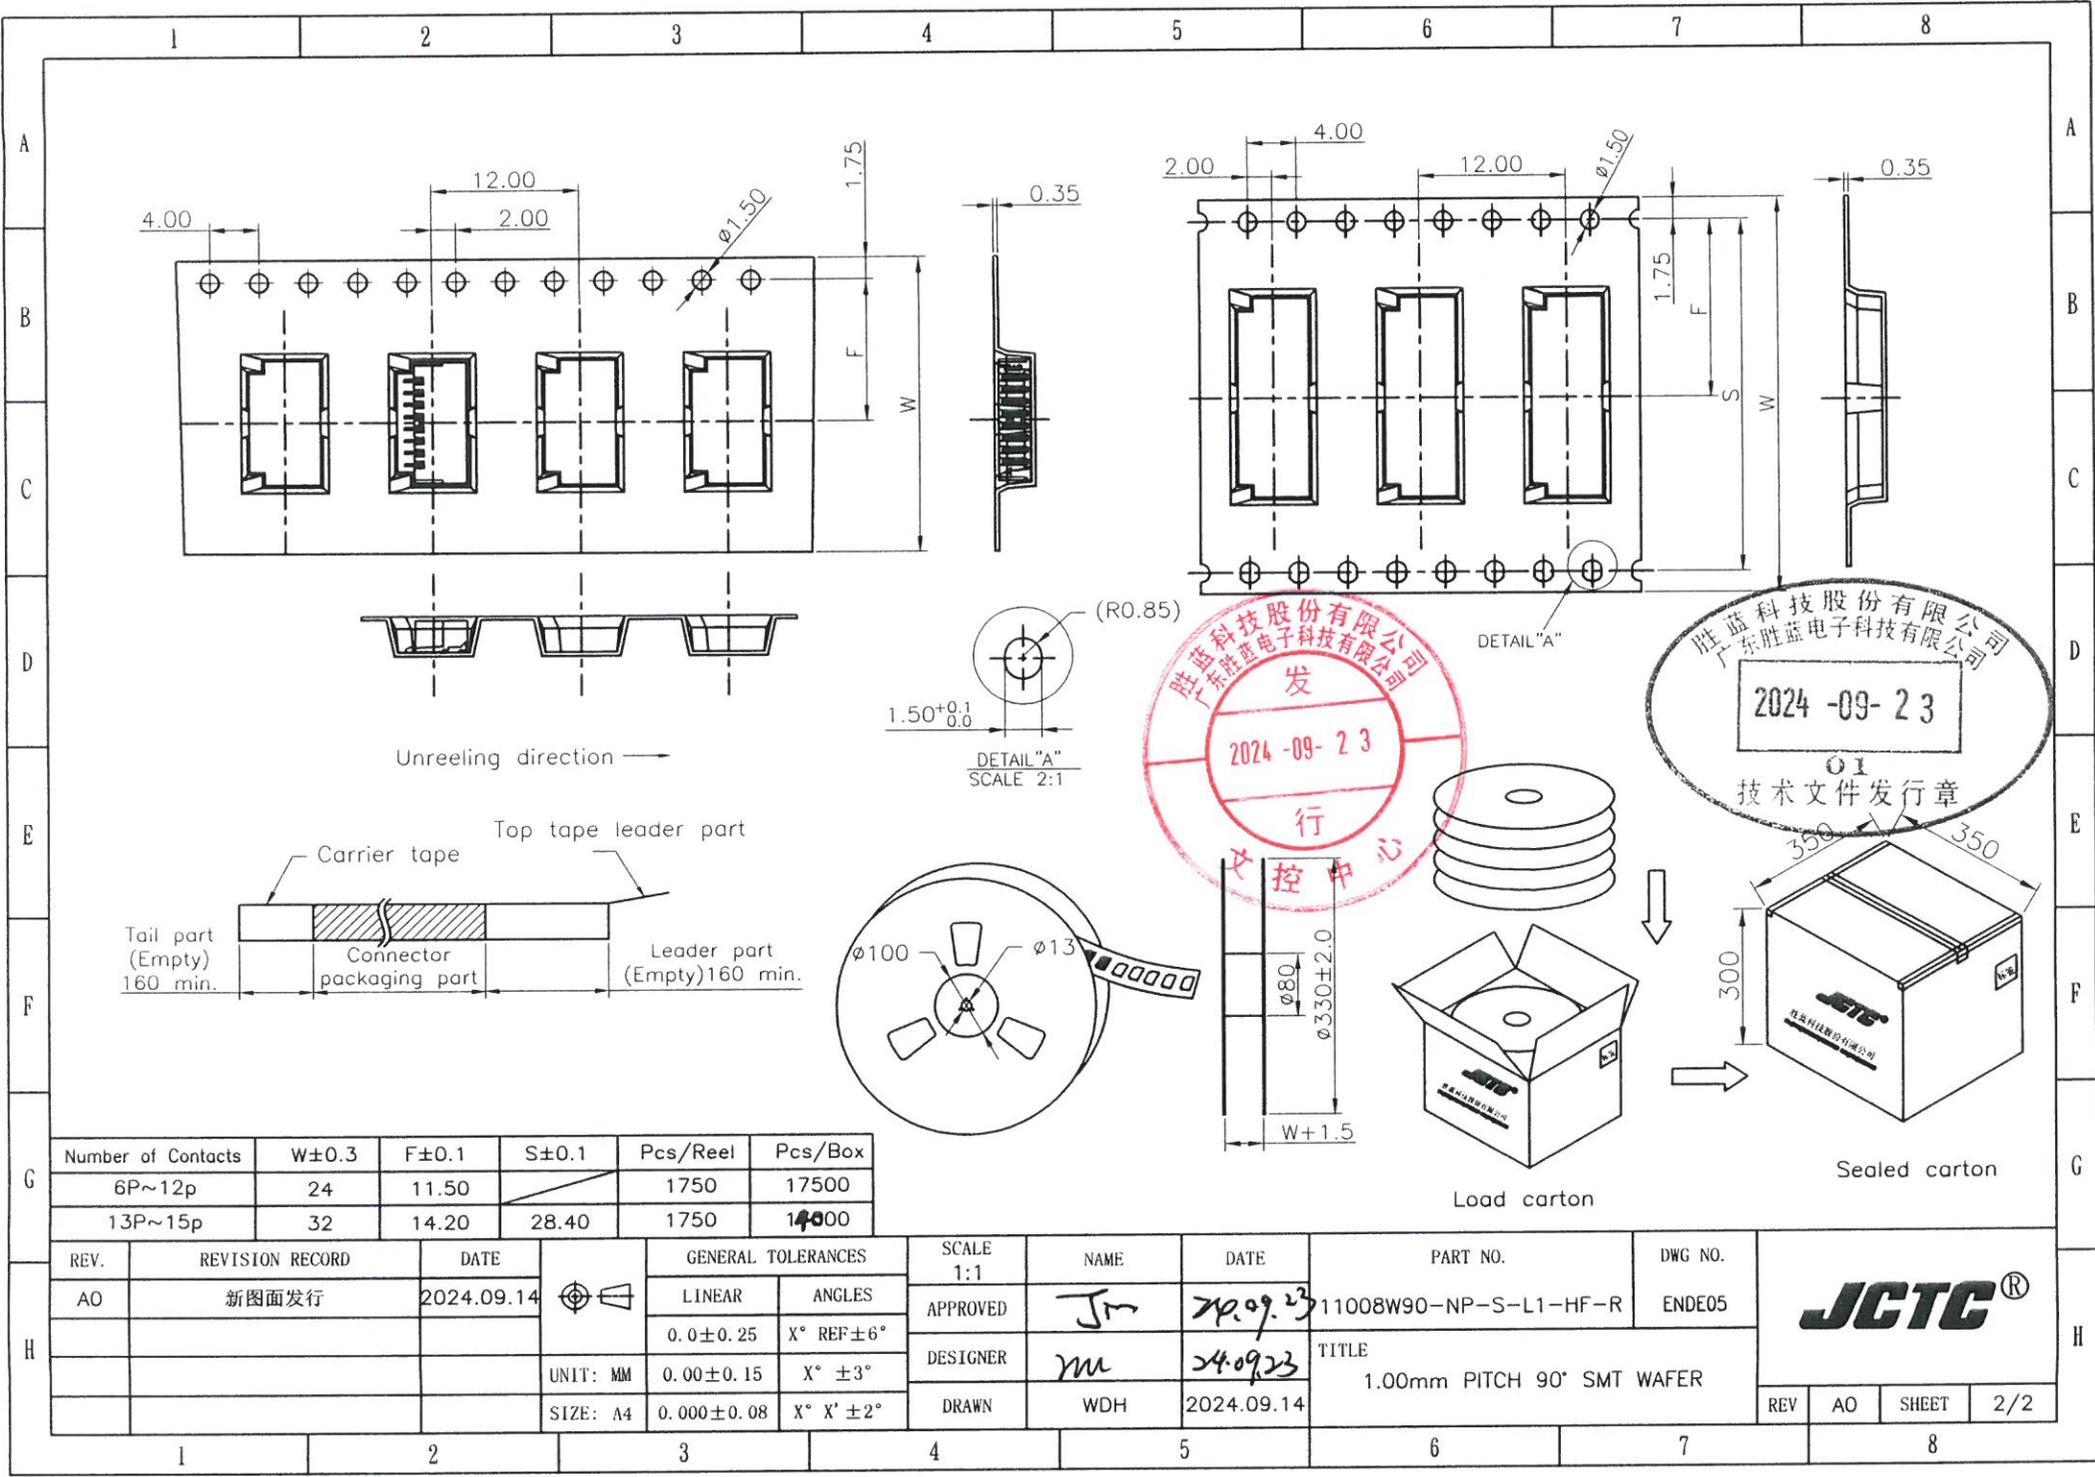

Number of Contacts	W±0.3	F±0.1	S±0.1	Pcs/Reel	Pcs/Box
6P~12p	24	11.50		1750	17500
13P~15p	32	14.20	28.40	1750	17500

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
AO	新图面发行	2024.09.14	LINEAR	ANGLES	1:1	Jm	20.09.23	11008W90-NP-S-L1-HF-R	ENDE05
			0.0±0.25	X° REF±6°	APPROVED				
			0.00±0.15	X° ±3°	DESIGNER	W	24.09.23	TITLE	
			0.000±0.08	X° X' ±2°	DRAWN	WDH	2024.09.14	1.00mm PITCH 90° SMT WAFER	

REV	AO	SHEET	2/2
-----	----	-------	-----

JCTC®