



A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

4P~20P 双触点




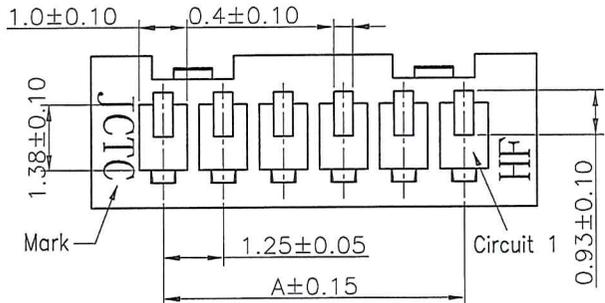


2P~3P 单触点

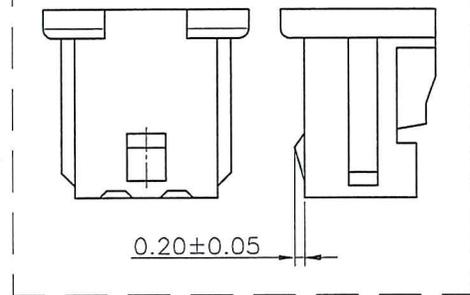

Specifications:  
 Rated Voltage : 125V AC/DC  
 Rated Current : 1A AC,DC  
 Withstand Voltage : 250V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -40°C~+85°C  
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Part No	Dimensions		
	A	B	C
2P		3.00	4.25
3P	2.50	4.25	5.50
4P	3.75	5.50	6.75
5P	5.00	6.75	8.00
6P	6.25	8.00	9.25
7P	7.50	9.25	10.50
8P	8.75	10.50	11.75
9P	10.00	11.75	13.00
10P	11.25	13.00	14.25
11P	12.50	14.25	15.50
12P	13.75	15.50	16.75
13P	15.00	16.75	18.00
14P	16.25	18.00	19.25
15P	17.50	19.25	20.50
16P	18.75	20.50	21.75
17P	20.00	21.75	23.00
18P	21.25	23.00	24.25
19P	22.50	24.25	25.50
20P	23.75	25.50	26.75

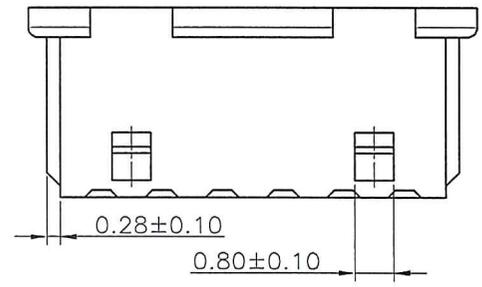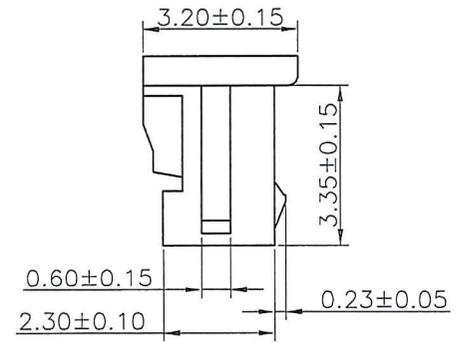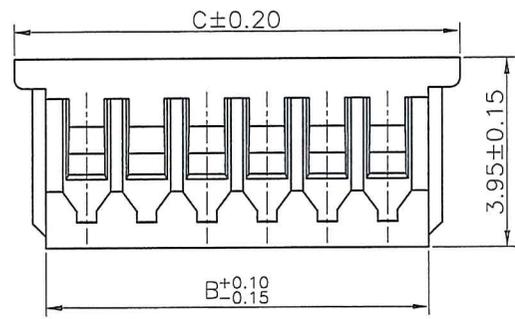


11251H00-NPX-XX-HF-NK

- ① Series No.
- ② H90 : Side Contact  
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A~Y)  
Blank : Natural type
- ⑤ PT : PBT  
Blank : Nylon 66
- ⑥ HF : Halogen Free
- ⑦ NK : No Mark  
Blank : Mark

Suitable for JCTC 11251 series terminal

Part No.	Material	Color
11251H00-NP	Nylon 66,UL94V-0	本色
11251H00-NP-NK	Nylon 66,UL94V-0	本色
11251H00-NP-PT	PBT,UL94V-0	本色
11251H00-NP-HF	Nylon 66,UL94V-0	本色
11251H00-NP-HF-NK	Nylon 66,UL94V-0	本色
11251H00-NPA	Nylon 66,UL94V-0	黑色
11251H00-NPA-NK	Nylon 66,UL94V-0	黑色
11251H00-NPA-HF	Nylon 66,UL94V-0	黑色无卤
11251H00-NPA-HF-NK	Nylon 66,UL94V-0	黑色无卤
11251H00-NPE	Nylon 66,UL94V-0	黄色
11251H00-NPE-NK	Nylon 66,UL94V-0	黄色

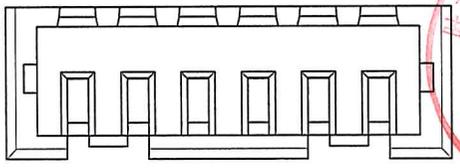

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
C3	更换公司名称	2016.12.26	LINEAR ANGLES 0.0±0.25 X° REF±6°	1:1	Nelson	23.02.25	11251H00-NPX-XX-XX-XX	ENDE05
C4	依HN1804250063设变	2018.04.25						
C5	ECN20221107262	2022.10.15	0.00±0.15 X° ±3° 0.000±0.08 X° X' ±2°		VM	23.02.25	TITLE MX 1.25mmPITCH HOUSING	
C6	YB20230220004	2023.02.25						

