

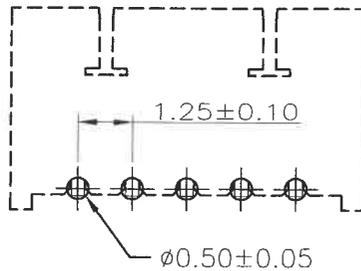
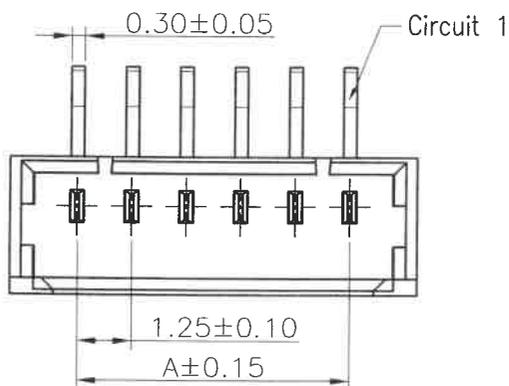
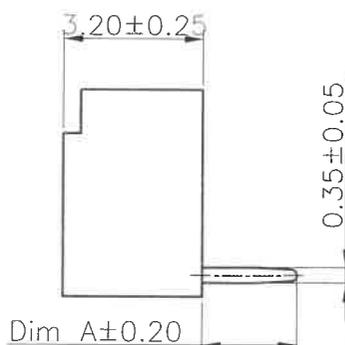
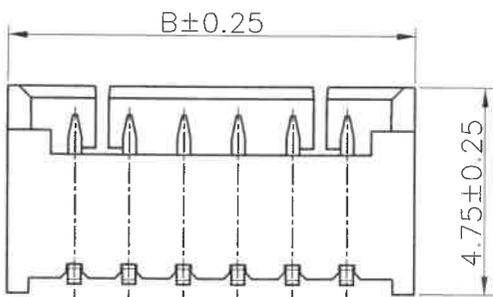


RoHS 2.0

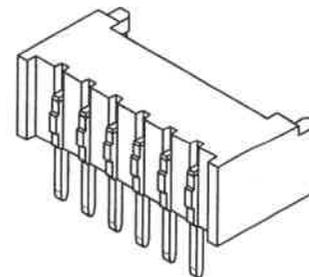

P.C.B. LAYOUT
GENERAL TOLERANCES: ±0.05mm

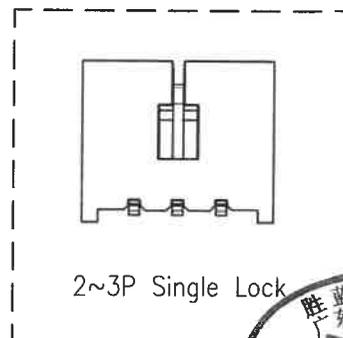

Dim A±0.20

2024-12-27
01
技术文件发行章

Circuits Part No	Dimensions	
	A	B
2P		4.35
3P	2.50	5.60
4P	3.75	6.85
5P	5.00	8.10
6P	6.25	9.35
7P	7.50	10.60
8P	8.75	11.85
9P	10.00	13.10
10P	11.25	14.35
11P	12.50	15.60
12P	13.75	16.85
13P	15.00	18.10
14P	16.25	19.35
15P	17.50	20.60
20P	23.75	26.85

2024-12-27
发行
文控中心

4~20P Double Lock

11251W90-NPX-3E

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank : Natural type
- ⑤ 3E : Matte Tin Plated
5A : Gold Flash
01 : Dim A=1.5
HF : Halogen Free

Specifications:
Rated Voltage : 125V AC/DC
Rated Current : 1A AC,DC
Withstand Voltage : 250V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 100MΩ(MIN.)
Temperature Range : -40°C~+85°C

Part No.	Material	Color	Pin Material	Dim A
11251W90-NP	High temperature plastic,UL94V-0	Natural (Beige)	Phosphor Bronze/Tin-plated	2.2
11251W90-NP-5A	High temperature plastic,UL94V-0	Natural (Beige)	Phosphor Bronze/Gold Flash	2.2
11251W90-NPE	High temperature plastic,UL94V-0	Yellow	Phosphor Bronze/Tin-plated	2.2
11251W90-NP-3E	High temperature plastic,UL94V-0	Natural (Beige)	Phosphor Bronze/Matte Tin-plated	2.2
11251W90-NP-HF	High temperature plastic,UL94V-0	Natural (Beige)	Phosphor Bronze/Tin-plated	2.2
11251W90-NP-01	High temperature plastic,UL94V-0	Natural (Beige)	Phosphor Bronze/Tin-plated	1.5

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
C0	换图框发行	2009.11.25	UNIT: MM	LINEAR	1:1	J→	20.12.26	11251W90-NPX-XX	ENDE05
C5	变更公司名称	2016.12.28		0.0±0.25					
C6	YB202404230006	2024.04.25	SIZE: A4	0.00±0.15	X° REF±6°	ZJM	24.12.26	Molex 1.25mm PITCH DIP WAFER	TITLE
D0	YB202410250006	2024.12.26		0.000±0.08					

JCTC®

REV DO SHEET 1/1