
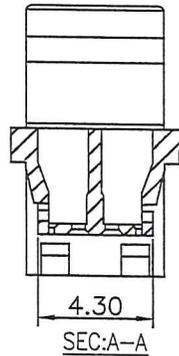



1 2 3 4 5 6 7 8

A

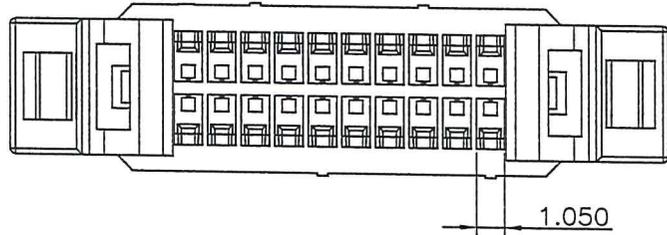




11252H00-2xNPX-L-HF
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
A : Black type
- ⑤ L: Lock TYPE
- ⑥ HF: Halogen Free

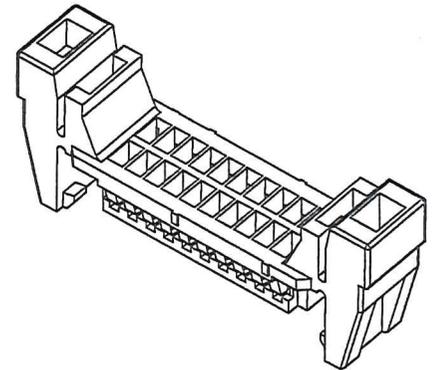


B

C

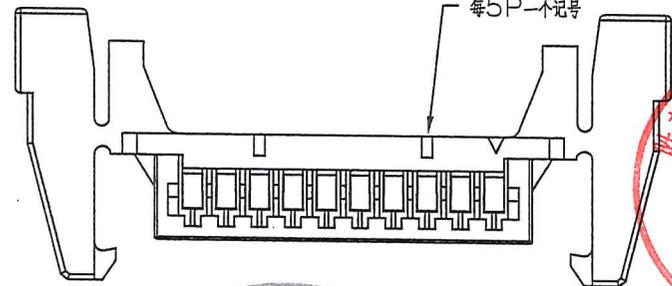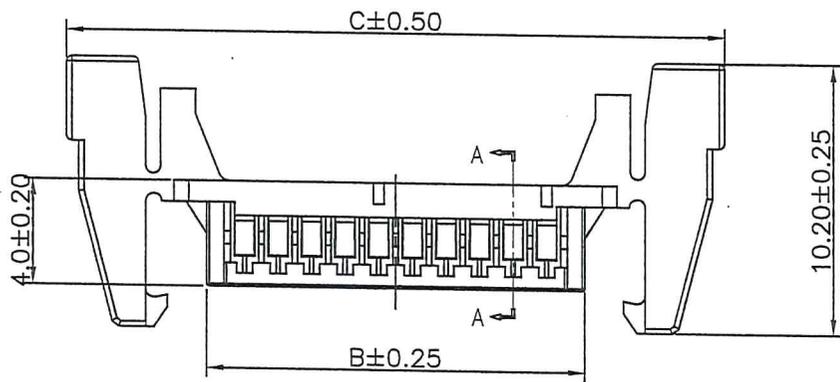

D

E

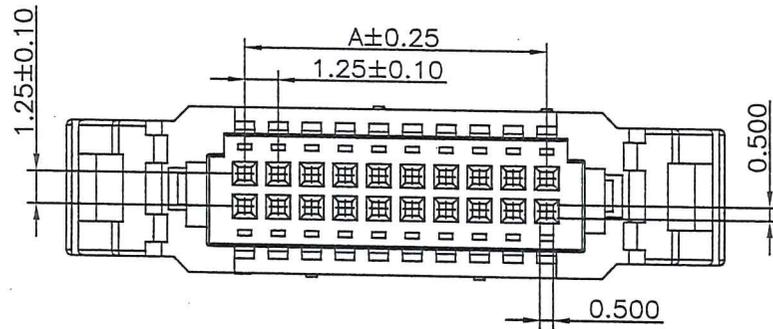

Specifications:
 Rated Voltage : 100V AC/DC
 Rated Current : 1A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 500MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements



Circuit	Dimensions		
	A	B	C
2x5P	5.00	7.85	18.25
2x10P	11.25	14.10	24.50
2x12P	13.75	16.60	27.00
2x15P	17.50	20.35	30.75
2x20P	23.75	26.60	37.00

F

G

Part No.	Material	Color
11252H00-2xNP-L-HF	Nylon 66,UL94V-0	Natural(White)
11252H00-2xNPA-L-HF	Nylon 66,UL94V-0	Black

REV.	REVISION RECORD	DATE
A0	新图面发行	17.06.22
A1	HN2009170257	20.09.17
A2	依PBJOA202203010004新增规格	22.03.16

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X'±2°

SCALE:	NAME	DATE
1:1	Nelson	22.03.16
APPROVED	WCL	22.03.16
DESIGNER	WCL	22.03.16
DRAWN	WCL	22.03.16

PART. NO:	DWG. NO:
11252H00-2xNPX-L-HF	ENDE05
TITLE: 1.25mm PITCH HOUSING -- LOCK TYPE (有拉环型)	

JCTC®
 TERMINAL&CONNECTORS
 REV: A2 SHEET: 1/1

H

1 2 3 4 5 6 7 8