

11254H00-NPX-L1-HF

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A=Y)
Blank : Natural type
- ⑤ L1 : L1 Type
- ⑥ HF : Halogen Free

Circuits	Dimensions		
	A	B	C
2P	4.50	4.50	3.20
3P	2.50	5.75	4.45
4P	3.75	7.00	5.70
5P	5.00	8.25	6.95
6P	6.25	9.50	8.20
7P	7.50	10.75	9.45
8P	8.75	12.00	10.70
9P	10.00	13.25	11.95
10P	11.25	14.50	13.20
11P	12.50	15.75	14.45
12P	13.75	17.00	15.70
13P	15.00	18.25	16.95
14P	16.25	19.50	18.20
15P	17.50	20.75	19.45
16P	18.75	22.00	20.70




Specifications:
 Rated Voltage : 50V AC/DC
 Rated Current : 2.2A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Dry state : Pressing the lock is not allow
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

Part No.	Material	Color
11254H00-NP-L1-HF	Nylon 66,UL 94V-0	Natural(White)
11254H00-NPA-L1-HF	Nylon 66,UL 94V-0	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO.:	DWG. NO.:
A0	The new version file were released	23.08.01	LINEAR 0.0±0.25	1:1			11254H00-NPX-L1-HF	ENDE05
			ANGLES X° REF±6°	APPROVED				
			0.00±0.15	DESIGNER			TITLE:	
			X° ±3°	DRAWN	Fau	23.08.01	Molex 1.25 HSG(小按扣)	
			UNIT: MM					
			SIZE: A4					
			0.000±0.08					
			X° X'±2°					



REV: A0 SHEET: 1/2

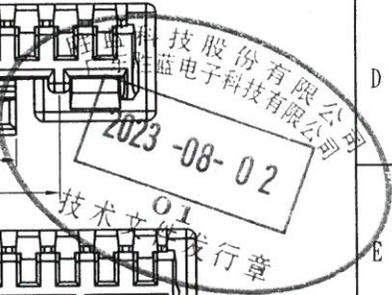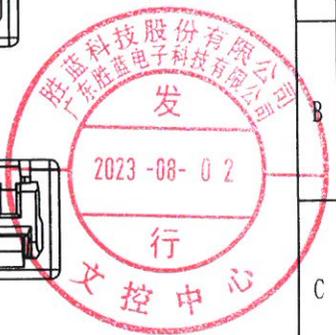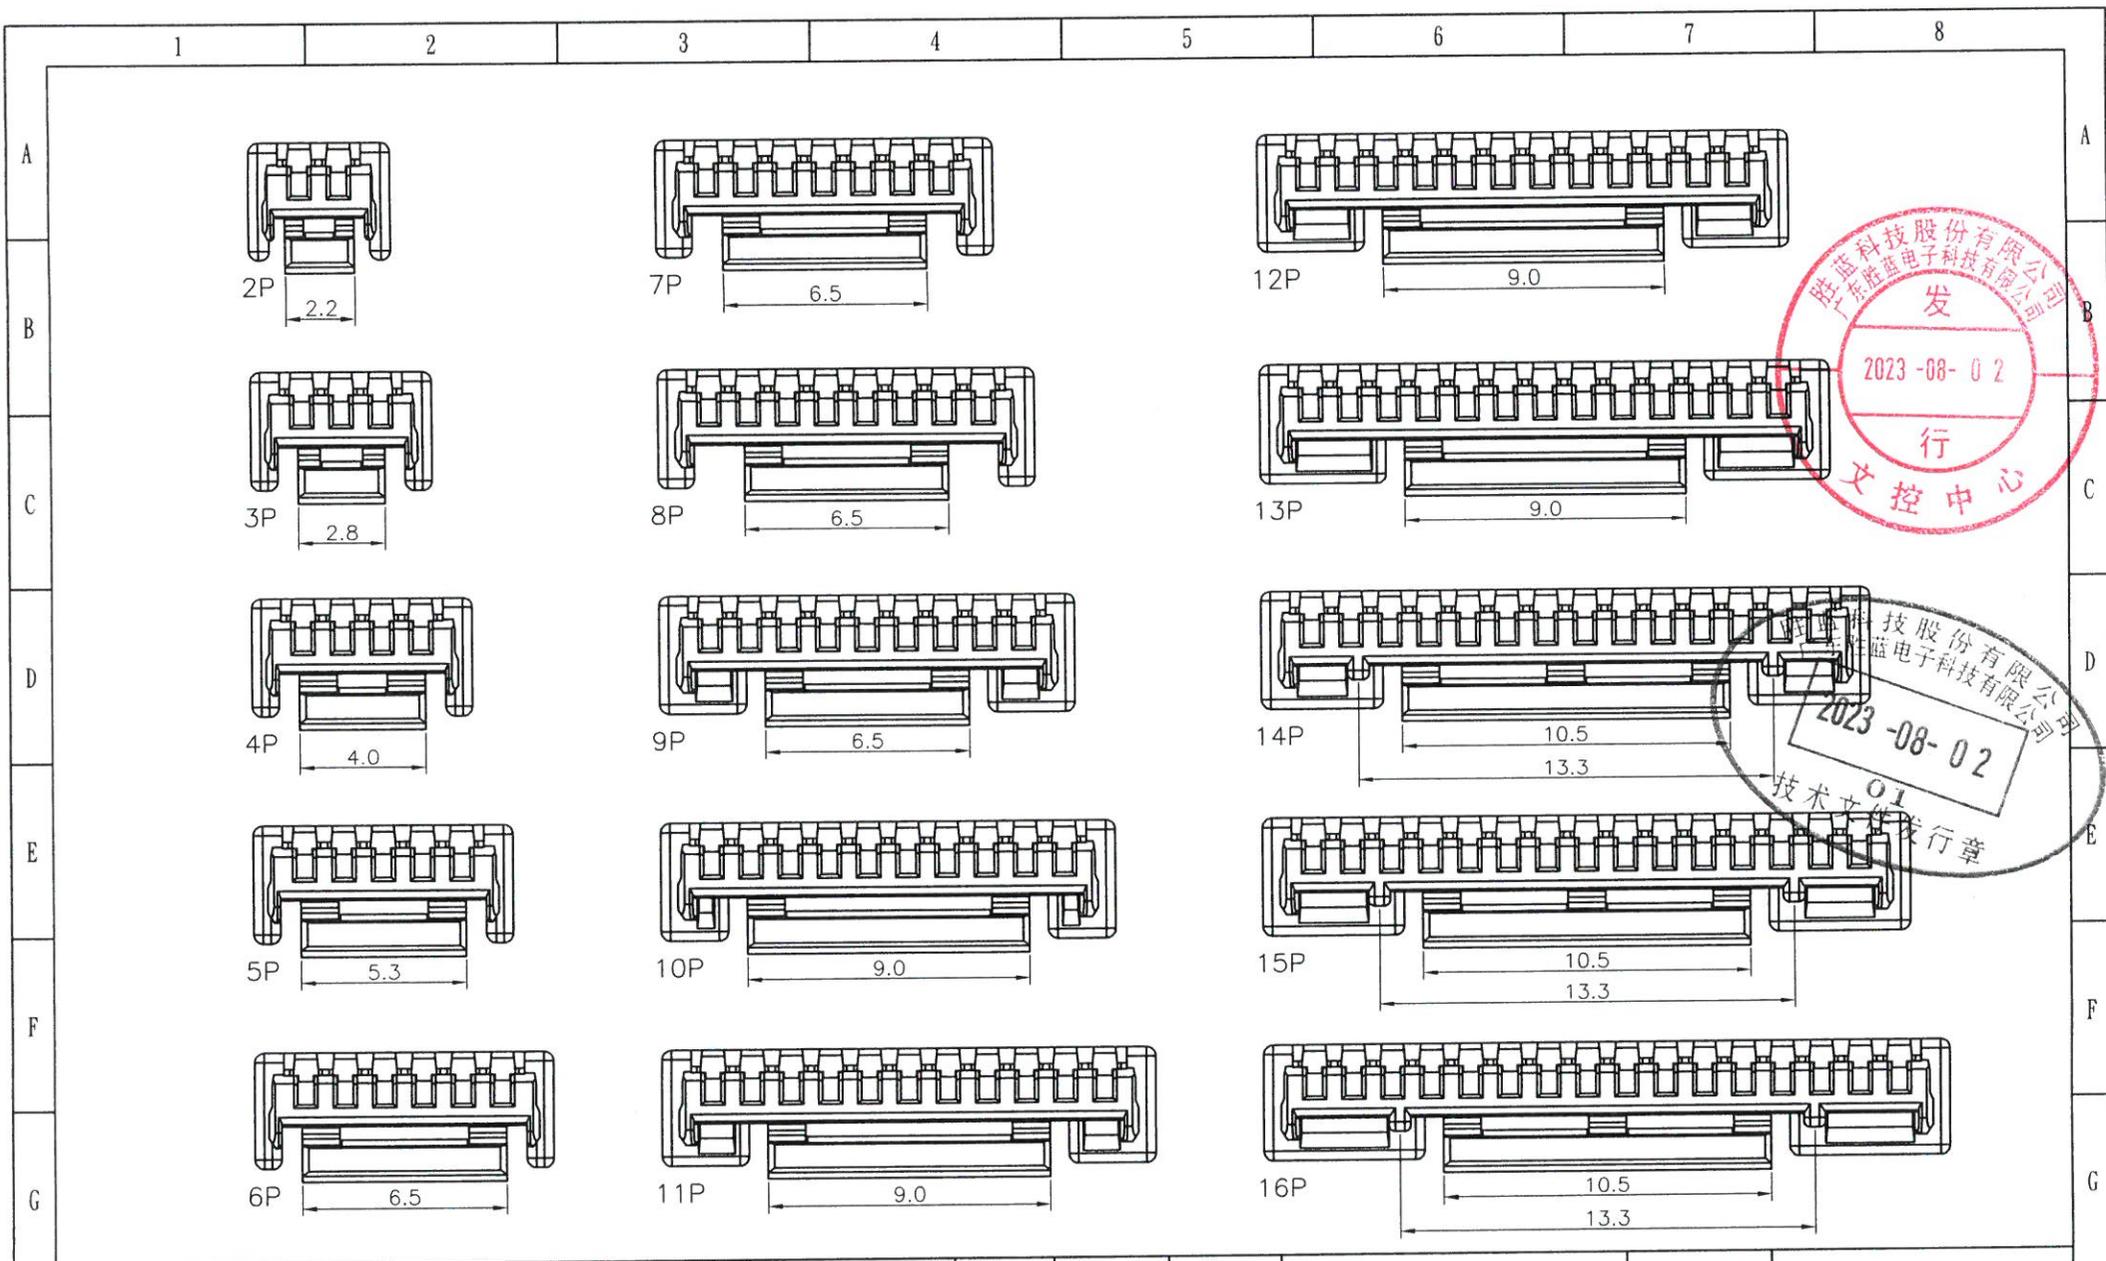

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	
A0	The new version file were released	23.08.01		LINEAR	ANGLES	APPROVED		23.8.1	11254H00-NPX-L1-HF	ENDE05	
			0.0±0.25	X° REF±6°	DESIGNER			TITLE:			
			UNIT: MM	0.00±0.15	X° ±3°	DRAWN	Fau	23.08.01	Molex 1.25 HSG (小按钮)		
			SIZE: A4	0.000±0.08	X° X'±2°					REV: A0	SHEET: 2/2