
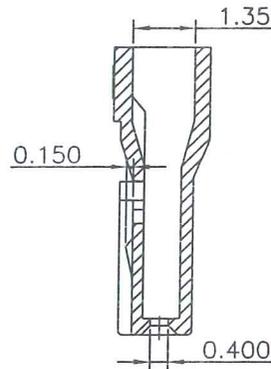


1 2 3 4 5 6 7 8

A

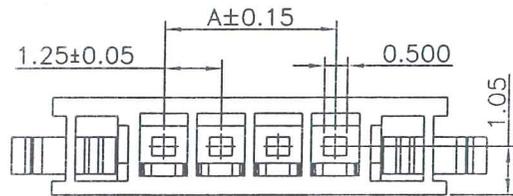

Specifications:

Rated Voltage : 125V AC/DC
 Rated Current : 1A AC,DC
 Withstand Voltage : 250V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

11255H00-NP-L-HF

① ② ③ ④ ⑤




- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ L : With Lock
- ⑤ HF : Halogen Free

B

B

C

C

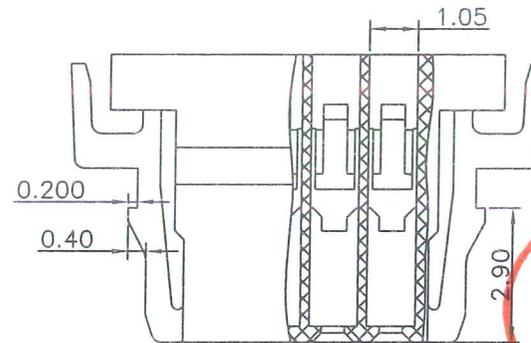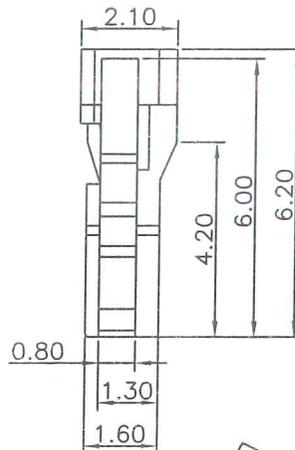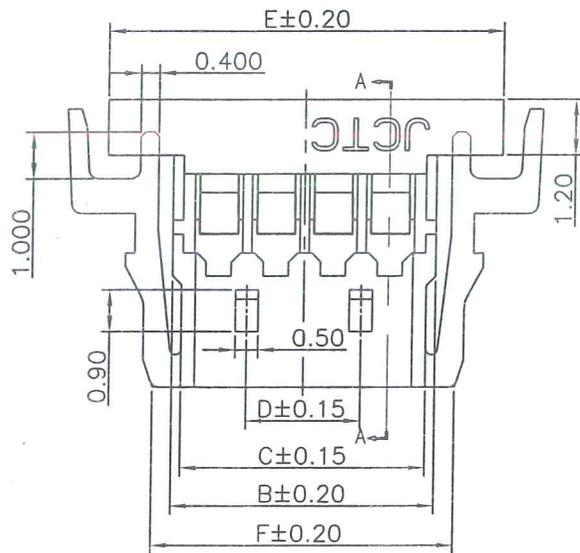

D

D

E

E

Dimensional Ordering Information.

Circuits Part No	Dimensions					
	A	B	C	D	E	F
4P	3.75	5.75	5.35	2.50	8.60	6.60
6P	6.25	8.25	7.85	5.00	11.10	9.10
14P	16.25	18.25	17.85	15.00	21.10	19.10

F

F

G

G

Suitable for JCTC 11255 series terminal

Part No.	Material	Color
11255H00-NP-L-HF	Nylon 66,UL 94V-0	本色无卤

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO.:	DWG. NO.:	 JCTC® TERMINAL&CONNECTORS
A0	新图面发行	15.03.30	LINEAR	1:1			11255H00-NPX-L-HF	ENDE05	
A1	新增PIN位	16.06.24	0.0±0.25	APPROVED	张振坤	21.03.25			
A2	变更公司名称	17.03.14	0.00±0.15	DESIGNER	张振坤	21.03.25	TITLE:		
A3	换图框发行	21.03.25	0.000±0.03	DRAWN	张振坤	21.03.25	1.25mm PITCH HOUSING - Lock TYPE		
			ANGLES						REV: A3
			X° REF±6°						SHEET: 1/1
			X° ±3°						
			X° X'±2°						

1 2 3 4 5 6 7 8