

Specifications:

Rated Voltage : 125V AC/DC

Rated Current : 1A AC,DC

Withstand Voltage : 250V AC/minute

Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Temperature Range : -25°C~+85°C

11255H00-NPX-HF-NK

① ② ③④⑤ ⑥

① Series No.

② H90 : Side Contact

H00 : Up Contact

③ No. of Circuits

④ X : Product color(A--Y)

Blank : Natural type

⑤ HF : Halogen Free

⑥ NK : No Mark

Blank : Mark

Dimensional Ordering Information:

Circuits Part No	Dimensions			
	A	B	C	D
2P	1.25	2.65	5.72	
3P	2.50	3.90	6.97	
4P	3.75	5.15	8.22	2.50
5P	5.00	6.40	9.47	3.75
6P	6.25	7.65	10.72	5.00
7P	7.50	8.90	11.97	6.25
8P	8.75	10.15	13.22	7.50
9P	10.00	11.40	14.47	8.75
10P	11.25	12.65	15.72	10.00
11P	12.50	13.90	16.97	11.25
12P	13.75	15.15	18.22	12.50
13P	15.00	16.40	19.47	13.75
14P	16.25	17.65	20.72	15.00
15P	17.50	18.90	21.97	16.25
16P	18.75	20.15	23.22	17.50
17P	20.00	21.40	24.47	18.75
18P	21.25	22.65	25.72	20.00
19P	22.50	23.90	26.97	21.25
20P	23.75	25.15	28.22	22.50
26P	31.25	32.65	35.72	22.50
30P	36.25	37.65	40.72	22.50

Suitable for JCTC 11255 series terminal

Part No.	Material	Color
11255H00-NP	Nylon 66,UL 94V-0	本色
11255H00-NPA	Nylon 66,UL 94V-0	黑色
11255H00-NP-NK	Nylon 66,UL 94V-0	本色
11255H00-NPA-NK	Nylon 66,UL 94V-0	黑色
11255H00-NP-HF	Nylon 66,UL 94V-0	本色无卤
11255H00-NPA-HF	Nylon 66,UL 94V-0	黑色无卤
11255H00-NPC-HF	Nylon 66,UL 94V-0	红色无卤
11255H00-NP-HF-NK	Nylon 66,UL 94V-0	本色无卤

A

B

C

D

E

F

G

H

A

B

C






D

E

F

G

H

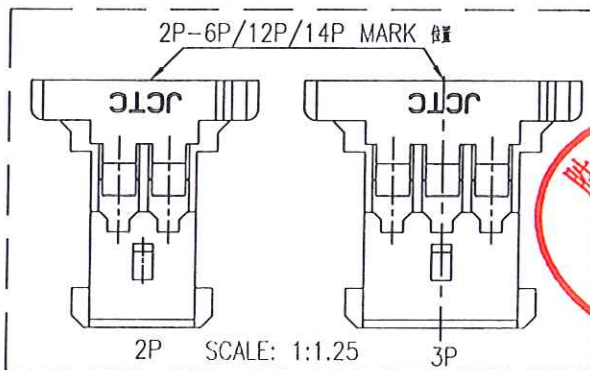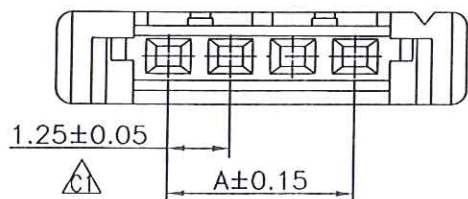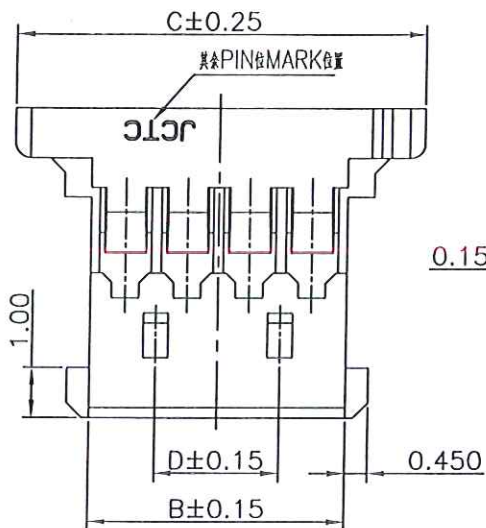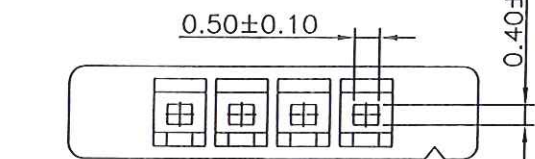

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO:	DWG. NO:	JCTC® TERMINAL&CONNECTORS	
C3	新增黑色无卤规格料号	11.03.21	LINEAR	1:1			11255H00-NPX-XX-XX	ENDE05		
C4	修改主体MARK位置	12.07.23	ANGLES	APPROVED	李祖明	21.04.12			REV: C6	SHEET: 1/1
C5	变更公司名称	17.03.30	0.0±0.25 X° REF±6°	DESIGNER	李祖明	21.04.10	TITLE:			
C6	WN2104100086	21.04.10	0.00±0.15 X° ±3°	DRAWN	全宇星	21.04.10	51146 1.25mm PITCH HOUSING			
			0.000±0.08 X° X'±2°							