

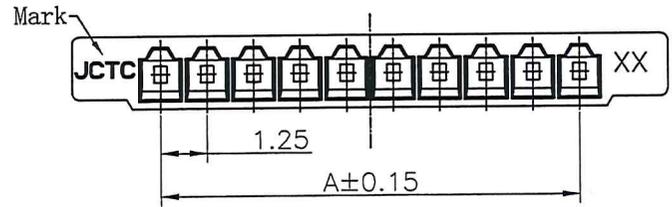


SEE DETAIL A

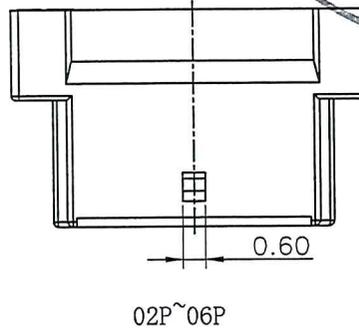

0.18±0.08

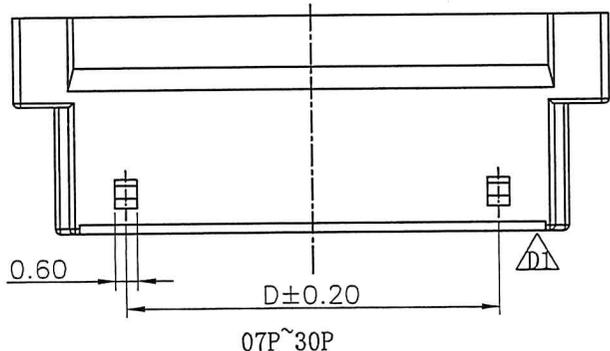

Specifications:
 Rated Voltage : 100V AC/DC
 Rated Current : 1A AC, DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 20mΩ (MAX.)
 Insulation Resistance : 500MΩ (MIN.)
 Temperature Range : -25° C~+85° C
 The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements



11256H00-NPX-HF-NK
 ① ② ③④⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color (A-Y)
Blank : Natural type
- ⑤ HF : Halogen Free
- ⑥ NK : No Mark
Blank : Mark

Circuits Part No	Dimensions			
	A	B	C	D
2P	1.25	6.00	3.80	
3P	2.50	7.25	5.05	
4P	3.75	8.50	6.30	
5P	5.00	9.75	7.55	
6P	6.25	11.00	8.80	
7P	7.50	12.25	10.05	6.25
8P	8.75	13.50	11.30	7.50
9P	10.00	14.75	12.55	8.75
10P	11.25	16.00	13.80	10.00
11P	12.50	17.25	15.05	11.25
12P	13.75	18.50	16.30	12.50
13P	15.00	19.75	17.55	13.75
14P	16.25	21.00	18.80	15.00
15P	17.50	22.25	20.05	16.25
20P	23.75	28.50	26.30	22.50
24P	28.75	33.50	31.30	27.50
25P	30.00	34.75	32.55	28.75
30P	36.25	41.00	38.80	35.00

Suitable for JCTC 11256 series terminal

Part No.	Material	Color
11256H00-NP	Nylon 66, UL 94V-0	本色
11256H00-NP-NK	Nylon 66, UL 94V-0	本色
11256H00-NPA	Nylon 66, UL 94V-0	黑色
11256H00-NPA-NK	Nylon 66, UL 94V-0	黑色
11256H00-NP-HF	Nylon 66, UL 94V-0	本色无卤
11256H00-NPA-HF	Nylon 66, UL 94V-0	黑色无卤
11256H00-NP-HF-NK	Nylon 66, UL 94V-0	本色无卤
11256H00-NPA-HF-NK	Nylon 66, UL 94V-0	黑色无卤



REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 TERMINAL&CONNECTORS
C5	HN1511030171	15. 11. 27			LINEAR	1:1			11256H00-NPX-XX-XX	ENDE05	
C6	更换公司名称	17. 03. 24			0.0±0.25	APPROVED	Welson	22-11-17			
D0	HN1811230212	18. 11. 23	UNIT: MM		0.00±0.15	DESIGNER	VM	22-11-17	TITLE:		
D1	依ECN20221108268变更D1一处	22. 11. 17	SIZE: A4		0.000±0.08	DRAWN	HZX	22. 11. 17	FI-S 1.25mm PITCH HOUSING		

REV: D1 SHEET: 1/1