



RoHS

$A \pm 0.20$   
 $1.25 \pm 0.10$   
 $0.30 \pm 0.03$

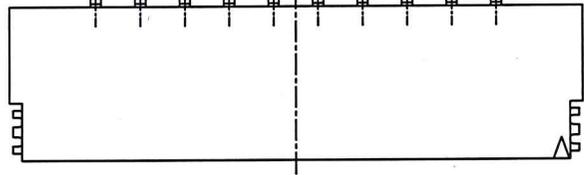


$A \pm 0.10$   
 $1.25 \pm 0.10$   
 $0.70 \pm 0.10$   
 Circuit 1  
 $1.90$

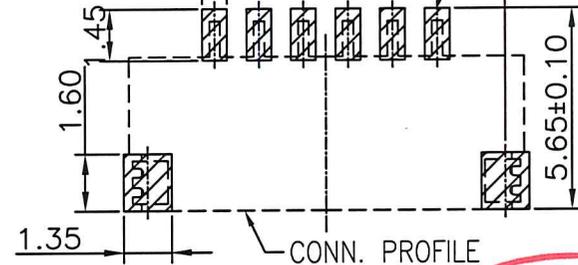


Rated Current : 1A AC/DC  
 Rated Voltage : 150V AC/DC  
 Withstand Voltage : 500V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 500MΩ(MIN.)  
 Temperature Range : -35°C~+85°C

Dimensional Ordering Information:

Circuits Part No	Dimensions			
	A	B	C	D
2P	--	6.10	4.01	
3P	2.50	7.35	5.26	
4P	3.75	8.60	6.51	
5P	5.00	9.85	7.76	
6P	6.25	11.10	9.01	
7P	7.50	12.35	10.26	6.25
8P	8.75	13.60	11.51	7.50
9P	10.00	14.85	12.76	8.75
10P	11.25	16.10	14.01	10.00
11P	12.50	17.35	15.26	11.25
12P	13.75	18.60	16.51	12.50
13P	15.00	19.85	17.76	13.75
14P	16.25	21.10	19.01	15.00
15P	17.50	22.35	20.26	16.25
20P	23.75	28.60	26.51	22.50
25P	30.00	34.85	32.76	28.75
30P	36.25	41.10	39.01	35.00



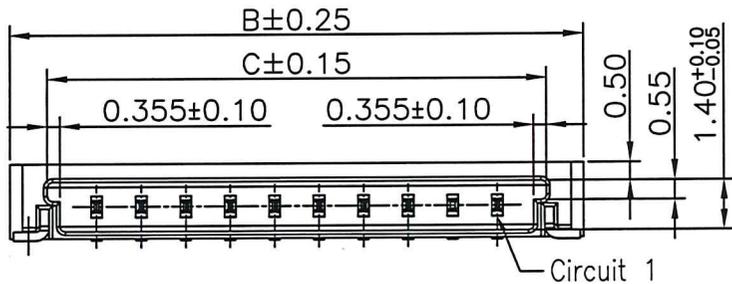


CONN. PROFILE  
 P.C.B. LAYOUT

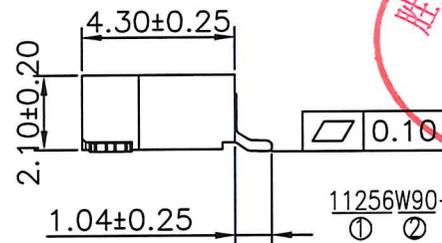

11256W90-NPX-S-2E-HF  
 ① ② ③④⑤ ⑥ ⑦

- ① Series No.
- ② W90 : Side Contact  
W00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color (A--Y)  
Blank : Natural type
- ⑤ S: SMT type
- ⑥ 2E: Tin-plated
- ⑦ HF: Halogen Free

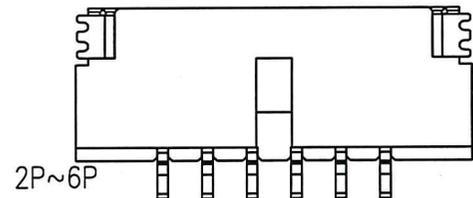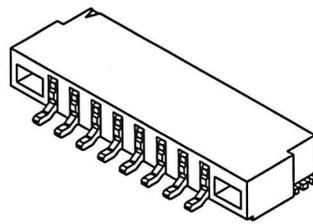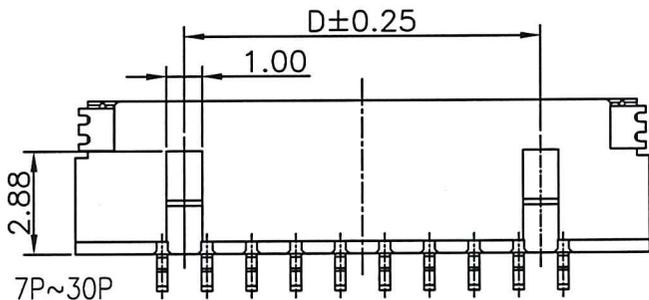

Part No.	Material	Color	Pin Material	Solder Tabs
11256W90-NP-S-2E	High temperature plastic,UL94V-0	Natural(Beige)	Phosphor Bronze/Tin-plated	Brass/Tin-plated
11256W90-NP-S	High temperature plastic,UL94V-0	Natural(Beige)	Phosphor Bronze/Gold-plated	Brass/Gold-flash
11256W90-NPA-S	High temperature plastic,UL94V-0	Natural(Black)	Phosphor Bronze/Gold-plated	Brass/Gold-flash
11256W90-NP-S-HF	High temperature plastic,UL94V-0	Natural(Beige)	Phosphor Bronze/Gold-plated	Brass/Gold-flash
11256W90-NP-S-2E-HF	High temperature plastic,UL94V-0	Natural(Beige)	Phosphor Bronze/Tin-plated	Brass/Tin-plated

REV.	REVISION RECORD	DATE
C1	新增镀锡规格	13. 11. 06
C2	整理图面	14. 11. 26
C3	WN1605040052	16. 05. 04
C4	变更公司名称	17. 04. 25

GENERAL TOLERANCES		SCALE:	NAME	DATE
LINEAR	ANGLES	1:1		
0.0±0.25	X° REF±6°	APPROVED		
0.00±0.15	X° ±3°	DESIGNER		
0.000±0.08	X° X'±2°	DRAWN	邓群庄	17.04.25


**JCTC**® 胜蓝科技股份有限公司  
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司  
 TITLE: 1.25mm PITCH WAFER-SMT TYPE

PART NO:	11256W90-NPX-S-XX	
DWG. NO:	ENDE05	
REV:	C4	SHEET: 1/2




RoHS

10~30 Contacts

2~9 Contacts


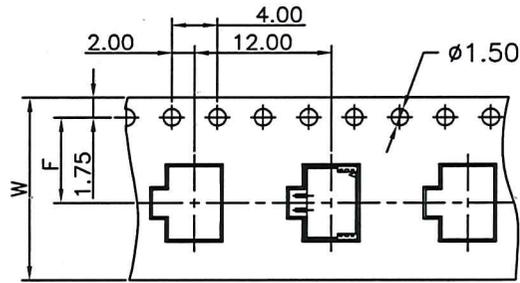


Unreeling direction →

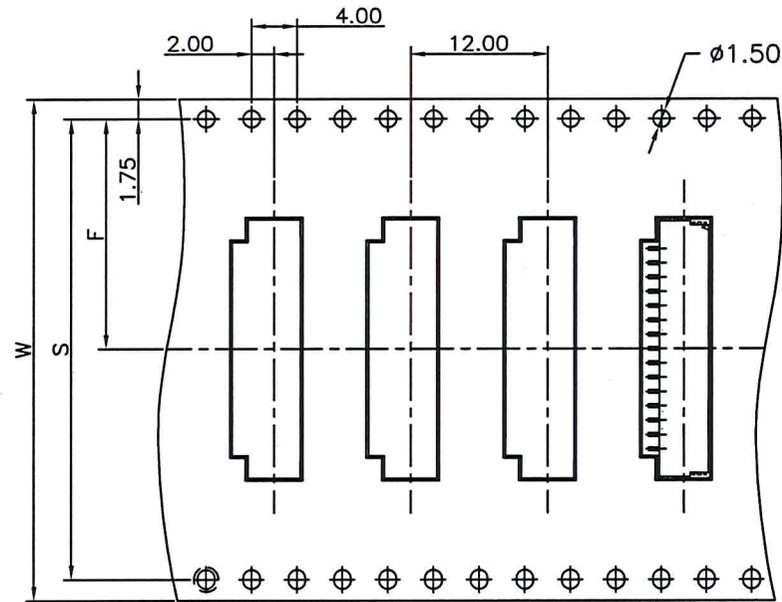

Unreeling direction →

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
02P	16	7.50		1,500
03P	16	7.50		1,500
04P	16	7.50		1,500
05P	24	11.50		1,500
06P	24	11.50		1,500
07P	24	11.50		1,500
08P	24	11.50		1,500
10P	32	14.20	28.40	1,500
11P	32	14.20	28.40	1,500
12P	32	14.20	28.40	1,500
13P	32	14.20	28.40	1,500
14P	32	14.20	28.40	1,500
15P	44	20.20	40.40	1,500
20P	44	20.20	40.40	1,500
25P	56	26.20	52.40	1,500
30P	56	26.20	52.40	1,500

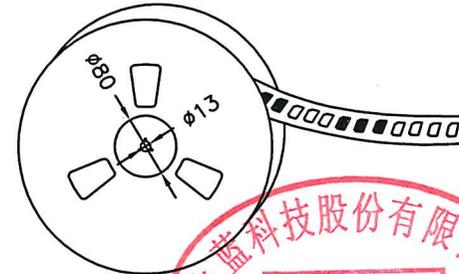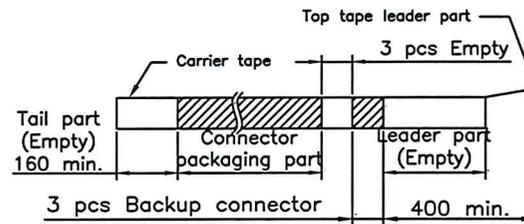

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司	PART. NO:
C0	新图面发行	10.06.26	LINEAR	1:1			TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	11256W90-NPX-S
C1	整理图面	14.11.26	0.0±0.25	APPROVED				DWG. NO:
C2	变更公司名称	17.04.25	X° REF±6°	DESIGNER				ENDE05
			0.00±0.15	DRAWN	邓群庄	17.04.25	TITLE:	REV: C2 SHEET: 2/2
			X° X'±2°				1.25mm PITCH WAFER-SMT TYPE	

1

2

3

4

5

6

7

8