
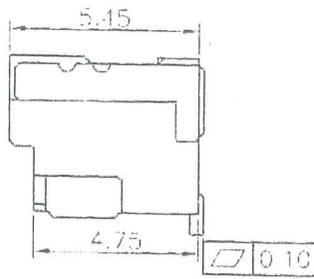
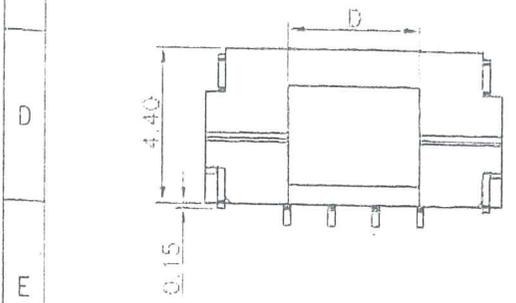
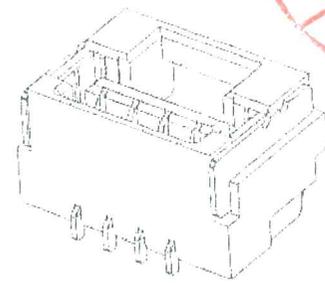
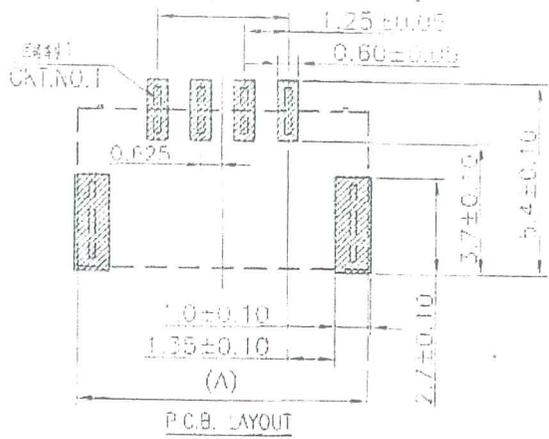




Rolls

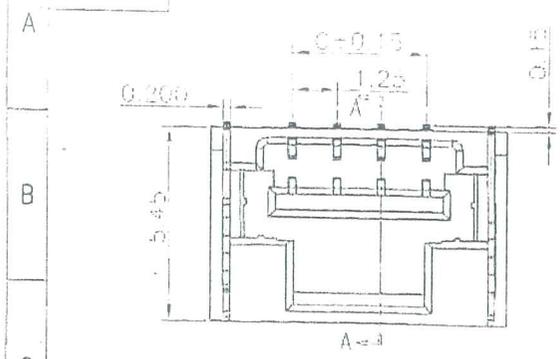

11259W00-NP-S-HF-NK
① ② ③ ④ ⑤ ⑥


- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ S : SMT Type
- ⑤ HF : Halogen Free
- ⑥ NK : No Mark

Dimensional Ordering Information				
Circuits Part No	Dimensions			
	A	B	C	C
2P	5.85	4.95	1.25	2.60
3P	7.10	6.20	2.50	3.00
4P	8.35	7.45	3.75	3.70
5P	9.60	8.70	5.00	3.70

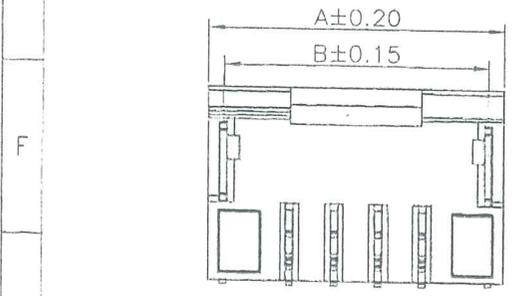

SECTION A-A

Specifications:
 Rated Voltage : 50V AC/DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C

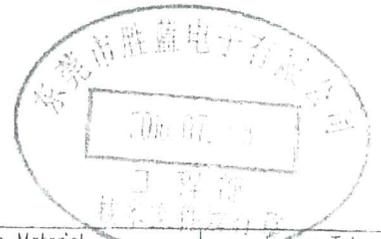

Part No.	Material	Color	Pin Material	Solder Tabs
11259W90-NP-S-NK	Nylon 6T,UL94V-0	Natural(Beige)	Phosphor Bronze/Matte Tin-plated	Brass/Matte Tin-plated
11259W90-NP-S-HF-NK	LCP,UL94V-0	Natural(Beige)	Phosphor Bronze/Matte Tin-plated	Brass/Matte Tin-plated

REV	REVISION RECORD	DATE	UNIT	VM
C0	新图面发行	14.09.01		
C1	WN1607260110	16.07.26		

GENERAL TOLERANCES		SCALE	NAME	DATE
LINEAR	ANGLES	1:1		
0.0±0.25	X° REF±6°	APPROVED	王水波	16.7.28
0.00±0.05		DESIGNER	王水波	16.7.28


JCTC® 苏州伟聚 东莞胜蓝
 TERMINAL & CONNECTORS 东莞胜蓝

PART NO:
11259W90-NP-S-XX
 DWG NO:
ENDE05



MX1 25mm PITCH WAFER

1/1 SHEET

RoHS

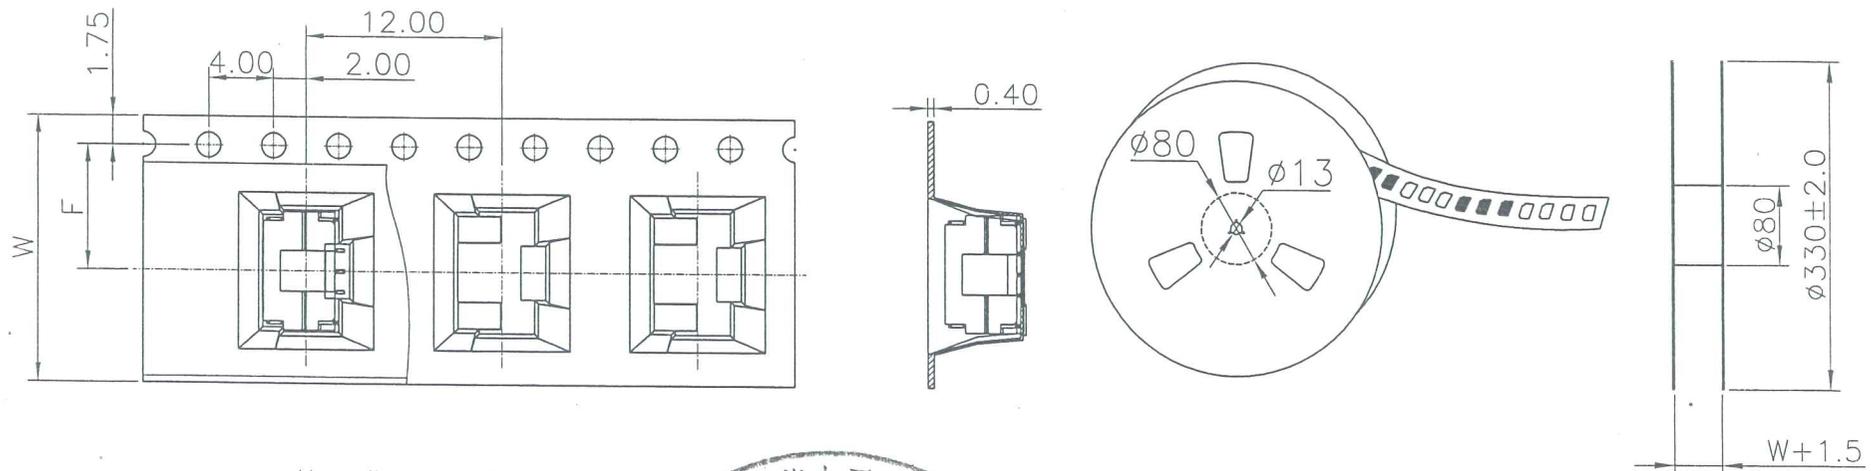

Unreeling direction →

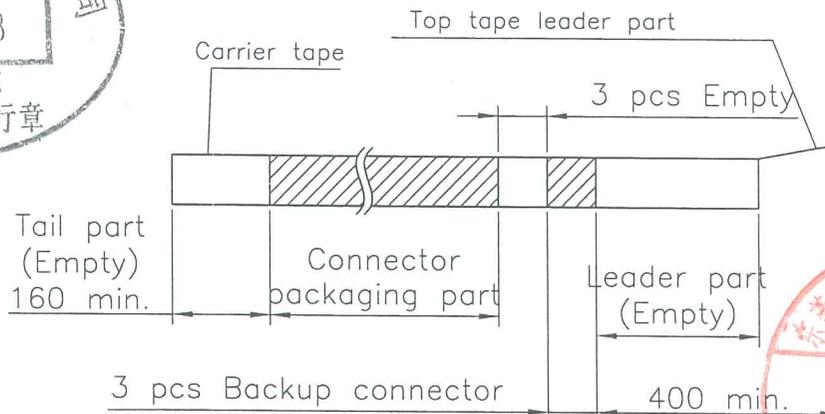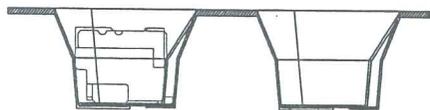

Number of Contacts	W±0.3	F±0.1	Q'ty/Reel
2P	16	7.50	1,000
3P	16	7.50	1,000
4P	16	7.50	1,000
5P	24	11.50	1,000

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO: 11259W90-NP-S-XX
C0	新图面发行	14.09.01	LINEAR	ANGLES	1:1			
C1	修正载带外观图	16.07.26	0.0±0.25	X° REF±6°	APPROVED	邓群庄	16.07.26	
			UNIT: MM	X° ±3°	DESIGNER	邓群庄	16.07.26	
			SIZE: A4	X° X'±2°	DRAWN	邓群庄	16.07.26	
TITLE: MX1.25mm PITCH WAFER JCTC® <input type="checkbox"/> 苏州伟聚 <input type="checkbox"/> 东莞胜景 <input checked="" type="checkbox"/> 东莞胜蓝 TERMINAL&CONNECTORS								DWG. NO: ENDE05
							REV: C1	SHEET: 2/2