

- SPECIFICATIONS:
- Material And Finish:
 - Insulator: PA6T UL94 V-0.
 - Cap: LCP UL94 V-0.
 - Contact: Copper Alloy Tin Plated (50u" Min) On Solder Area.
 - Solder Tabs: Copper Alloy Tin Plated (50u" Min) On Solder Area.
 - Electrical Specification:
 - Contact Resistance: 20m Ohms Max.
 - Insulation Resistance: 500M Ohms Min.
 - Withstanding Voltage: 500V Min. DC For 60 Seconds.
 - Voltage Rating: 100V AC.
 - Current Rating: 2A.
 - Environmental Specification:
 - Operating Temperature: -25°C ~ +85°C.

11506W00-NP-S-F-HF-R
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ S: SMT type
- ⑤ F : With Post
- ⑥ HF : Halogen Free
- ⑦ R : Reel pack




Circuits Part No	Dimensions			
	A	B	C	D
2P	6.00	1.50	3.60	4.20







REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	JCTC [®] TERMINAL&CONNECTORS
A0	The new version file were released	2022.03.01		SIZE: A4	LINEAR	ANGLES	APPROVED	<i>Nelson</i>	22.11.11	11506W00-NP-S-F-HF-R	
				0.00±0.15	X° REF±6°	DESIGNER	<i>ML</i>	22.11.11	TITLE CZ CONNECTOR SMT Wafer		
				0.000±0.08	X° X' ±2°	DRAWN	JIA	2022.03.01			REV A0 SHEET 1/2

1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

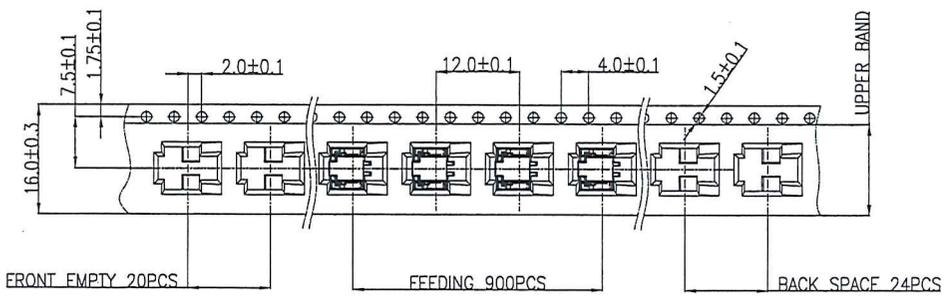

PACKAGING DIRECTION

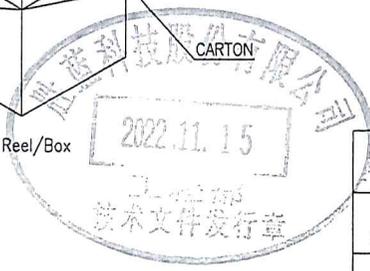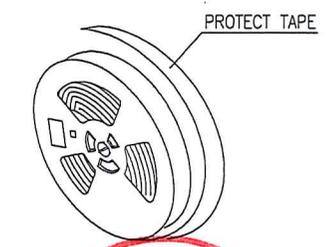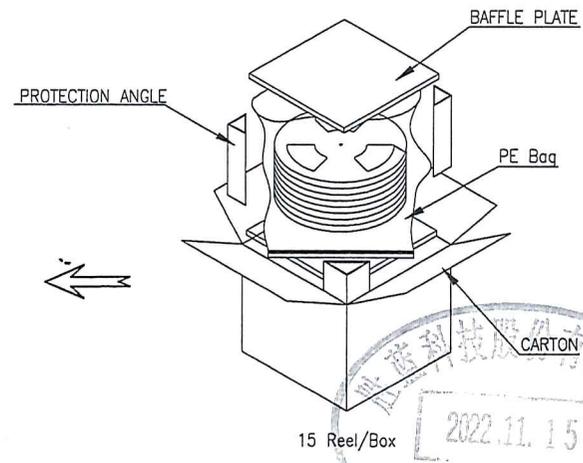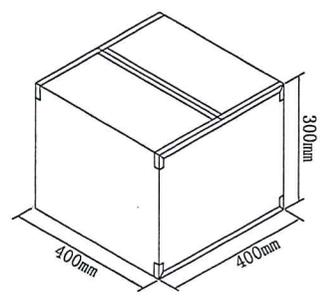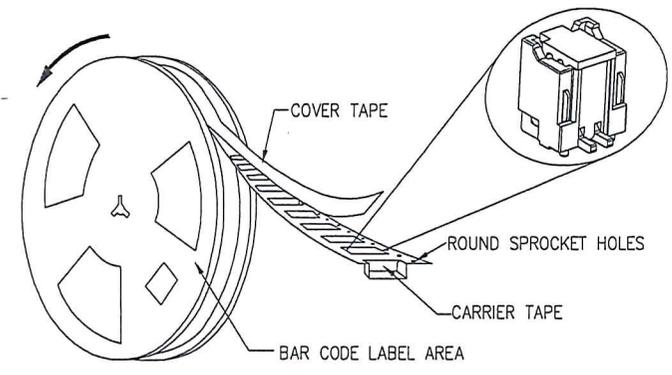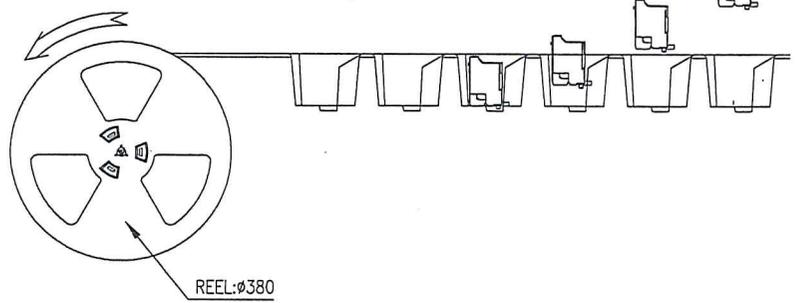

Dimensional Ordering Information:

Circuits Part No	Dimensions			
	A	B	C	D
2P	6.00	1.50	3.60	4.20

Number of Contacts	FRONT EMPTY	BACK SPACE	PCS/Reel	PCS/Box
2P	20PCS	24PCS	900	13500

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	JCTC [®] TERMINAL&CONNECTORS		
A0	The new version file were released	2022.03.01		SIZE: A4	LINEAR	ANGLES	APPROVED	Nelson	22.11.11	11506W00-NP-S-F-HF-R		ENDE05	
			0.0±0.25		X° REF±6°	DESIGNER	VLL	22.11.11	TITLE				
			0.00±0.15	X° ±3°	DRAWN	JIA	2022.03.01	CZ CONNECTOR SMT Wafer Packaging specification					
			0.000±0.08	X° X' ±2°						REV	A0	SHEET	2/2

1 2 3 4 5 6 7 8