

1 2 3 4 5 6 7 8





Specifications:

Rated Voltage : 250V AC/DC  
 Rated Current : 3A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 10mΩ(Max.)  
 Insulation Resistance : 800MΩ(Min.)  
 Temperature Range : -25°C~+85°C  
 Contact: Brass/Matte Tin-plated  
 Brass/15u"Au

Insulator: High temperature plastic,UL94V-0  
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

12002W00-2XNPX-B-XX-HF  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② W00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)  
Blank : Natural(Beige)  
A : Black
- ⑤ B: B TYPE
- ⑥ 3E: Matte Tin-plated 5G : 15u"Au
- ⑦ HF: Halogen Free

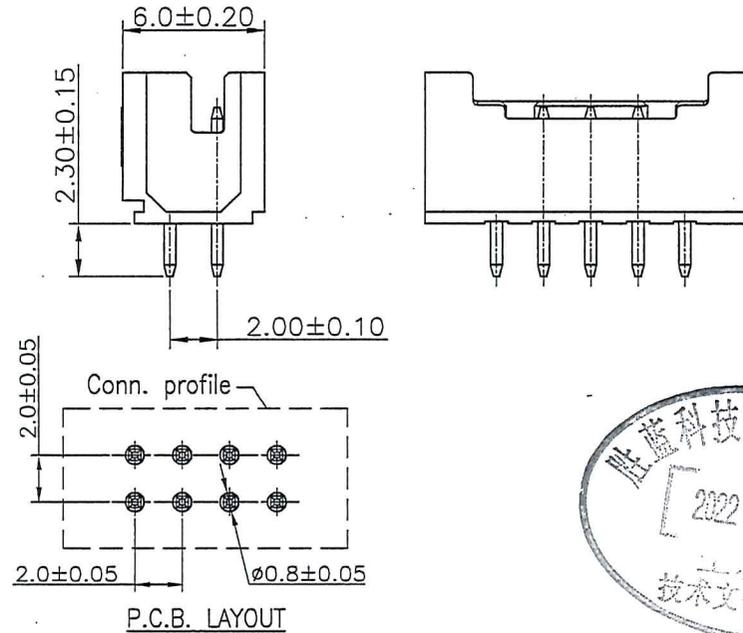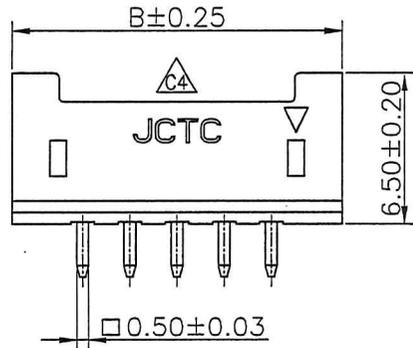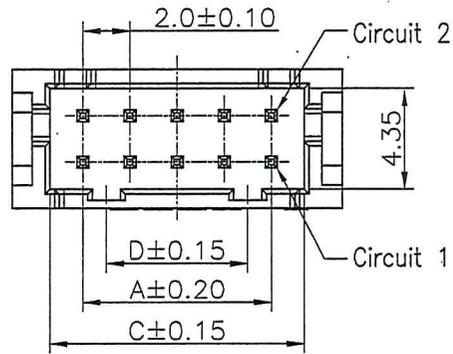

| Circuits | Dimensions |       |       |       |
|----------|------------|-------|-------|-------|
|          | A          | B     | C     | D     |
| 2x3P     | 4.00       | 10.00 | 6.70  | 2.00  |
| 2x4P     | 6.00       | 12.00 | 8.70  | 4.00  |
| 2x5P     | 8.00       | 14.00 | 10.70 | 6.00  |
| 2x6P     | 10.00      | 16.00 | 12.70 | 8.00  |
| 2x7P     | 12.00      | 18.00 | 14.70 | 10.00 |
| 2x8P     | 14.00      | 20.00 | 16.70 | 12.00 |
| 2x9P     | 16.00      | 22.00 | 18.70 | 14.00 |
| 2x10P    | 18.00      | 24.00 | 20.70 | 16.00 |
| 2x11P    | 20.00      | 26.00 | 22.70 | 18.00 |
| 2x12P    | 22.00      | 28.00 | 24.70 | 20.00 |
| 2x13P    | 24.00      | 30.00 | 26.70 | 22.00 |
| 2x14P    | 26.00      | 32.00 | 28.70 | 24.00 |
| 2x15P    | 28.00      | 34.00 | 30.70 | 26.00 |
| 2x16P    | 30.00      | 36.00 | 32.70 | 28.00 |
| 2x17P    | 32.00      | 38.00 | 34.70 | 30.00 |
| 2x18P    | 34.00      | 40.00 | 36.70 | 32.00 |
| 2x19P    | 36.00      | 42.00 | 38.70 | 34.00 |
| 2x20P    | 38.00      | 44.00 | 40.70 | 36.00 |
| 2x21P    | 40.00      | 46.00 | 42.70 | 38.00 |
| 2x22P    | 42.00      | 48.00 | 44.70 | 40.00 |
| 2x23P    | 44.00      | 50.00 | 46.70 | 42.00 |
| 2x24P    | 46.00      | 52.00 | 48.70 | 44.00 |
| 2x25P    | 48.00      | 54.00 | 50.70 | 46.00 |



| REV. | REVISION RECORD      | DATE     | GENERAL TOLERANCES |           | SCALE    | NAME          | DATE       | PART NO.  | DWG NO. | <br>TERMINAL&CONNECTORS |    |       |     |
|------|----------------------|----------|--------------------|-----------|----------|---------------|------------|---|---------|-------------------------|----|-------|-----|
| C1   | 增加黑色无卤规格             | 16.06.15 | LINEAR             | ANGLES    | 1:1      |               |            | 12002W00-2XNP-B-XX-HF                                 | ENDE05  |                         |    |       |     |
| C2   | 更新公司名称               | 17.01.03 | 0.0±0.25           | X° REF±6° | APPROVED | <i>Nelson</i> | 22.08.08   | TITLE<br>2.00mm PITCH DUAL ROW DIP TYPE<br>180° WAFER |         | REV                     | C4 | SHEET | 1/1 |
| C3   | WN2001100006         | 20.01.10 | 0.00±0.15          | X° ±3°    | DESIGNER | <i>mm</i>     | 22.07.08   |   |         |                         |    |       |     |
| C4   | 依ECN20220629155变更A1处 | 22.07.08 | 0.000±0.08         | X° X' ±2° | DRAWN    | ZZK           | 2022.07.08 |   |         |                         |    |       |     |

1 2 3 4 5 6 7 8